**Instream Flow Standard Assessment Report** 

# Island of Maui Hydrologic Unit 6048 **Puohokamoa**

December 2009

PR-2009-02



State of Hawaii Department of Land and Natural Resources Commission on Water Resource Management



#### COVER

Puohokamoa Stream (center) empties into the deep waters of the Pacific Ocean. Keopuka Rock, a State seabird sanctuary can be seen from the coast [Google Earth, 2009].

Note: This report is intended for both print and electronic dissemination and does not include diacritical marks in spelling of Hawaiian words, names, and place names due to problems associated with its use electronically. However, Commission staff has made attempts to include diacritical marks in direct quotations to preserve accuracy.

## **Table of Contents**

1.0	Introduction	.1
1.1 1.2 1.3 1.4 1.5 1.6 1.7	General Overview Current Instream Flow Standard Instream Flow Standards Interim Instream Flow Standard Process Instream Flow Standard Assessment Report Surface Water Hydrologic Units Surface Water Definitions	1 2 3 4
2.0	Unit Characteristics	11
2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8 2.9	GeologySoils RainfallSolar Radiation Evaporation Land Use Land Cover	12 12 14 15 15 16
3.0	Hydrology	25
3.1 3.2 3.3 3.4	Streams in Hawaii Ground Water Streamflow Characteristics Long-Term Trends in Streamflow	25 27
4.0	Maintenance of Fish and Wildlife Habitat	39
4.1 4.2 4.3 4.4 4.5	Impacts on Native Species Distribution Brief Overview of Literature Analysis of Habitat Availability Distribution of Native Freshwater Species Other Critical Habitats	42 43 46
5.0	Outdoor Recreational Activities	54
6.0	Maintenance of Ecosystems	58
7.0	Aesthetic Values	66
8.0	Navigation	
9.0	Instream Hydropower Generation	69
10.0	Maintenance of Water Quality	
11.0	Conveyance of Irrigation and Domestic Water Supplies	76
12.0	Protection of Traditional and Customary Hawaiian Rights	77
13.0	Noninstream Uses	97
	Stream Diversions Ground Water Recharge1	

<b>13.4 East Maui Irrigation System</b> 11         13.4.1       System Overview       12         13.4.2       History of Water Licenses       12         13.4.3       Hawaiian Commercial and Sugar Company       12         Sugar Production       12         Energy Production       12         Water Use       12	7
13.4.2       History of Water Licenses       12         13.4.3       Hawaiian Commercial and Sugar Company       12         Sugar Production       12         Energy Production       12         Water Use       12	7
13.4.2       History of Water Licenses       12         13.4.3       Hawaiian Commercial and Sugar Company       12         Sugar Production       12         Energy Production       12         Water Use       12	7
13.4.3       Hawaiian Commercial and Sugar Company       12         Sugar Production       12         Energy Production       12         Water Use       12	
Sugar Production       12         Energy Production       12         Water Use       12	
Energy Production	
Water Use12	
Economic Impact	
13.4.4 Maui Land and Pineapple Company	
Water Use	
Economic Impact	
13.4.5 Kula Agricultural Park	
Water Use	
Economic Impact	
13.4.6 County of Maui, Department of Water Supply	
Water Use	
Economic Impact	
13.5 County of Maui, Department of Water Supply Upcountry System	
13.5.1 System Overview	
13.5.2 System Users	
13.5.3 Water Use	
Historical and Current Uses	
Future Demands	
13.5.4 Economic Impact	
14.0 Bibliography15	2
15.0 Appendices	5

# List of Figures

Figure 1-1. Information to consider in setting measurable instream flow standards	2
Figure 1-2. Simplified representation of the interim instream flow standard and permanent instream flow standard processes. Key steps of the adopted interim IFS process are depicted in the left column by the boxes drawn with dotted lines	3
Figure 1-3. Topographic map of the Puohokamoa hydrologic unit in east Maui, Hawaii (Source: USGS, 1996).	7
Figure 1-4. Elevation range and the location of Puohokamoa hydrologic unit. (Source: State of Hawaii, Office of Planning, 1983; USGS 2001b)	8
Figure 1-5. Major and minor roads and Tax Map Key (TMK) parcel boundaries for Puohokamoa hydrologic unit (Source: County of Maui, 2006; County of Maui, Geographic Information Systems [GIS] Division, Department of Management, 2006; USGS 2001b)	9
Figure 1-6. Quickbird satellite imagery of Puohokamoa hydrologic unit (Source: County of Maui, Planning Department, 2004; USGS 2001b).	10
Figure 2-1. Orographic precipitation in the presence of mountains higher than 6,000 feet.	13
Figure 2-2. Generalized geology of Puohokamoa hydrologic unit (Source: Sherrod et al., 2007; State of Hawaii, Office of Planning, 2006a, and State of Hawaii, Commission on Water Resource Management, 2008d; USGS 2001b).	19
Figure 2-3. Soil classification in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2007c; USGS 2001b)	20
Figure 2-4. Mean annual rainfall and fog area in Puohokamoa; and solar radiation for Puohokamoa and the island of Maui, Hawaii (Source: Giambelluca et al., 1986; State of Hawaii, Office of Planning, 2006b; 2006c; USGS 2001b)	21
Figure 2-5. State land use district boundaries in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2006d; USGS 2001b)	22
Figure 2-6. C-CAP land cover in Puohokamoa hydrologic unit (Source: National Oceanic and Atmospheric Administration, Coastal Services Center, 2000; USGS 2001b)	23
Figure 2-7. Hawaii GAP land cover classes in Puohokamoa hydrologic unit (Source: Hawaii GAP Analysis Program, 2005; USGS 2001b)	24
Figure 3-1. Diagram illustrating the ground water system west of Keanae Valley, northeast Maui, Hawaii. Arrows indicate general direction of ground water flow (Source: Gingerich, 1999b)	27
Figure 3-2. Aquifer system area and well locations in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2006b; State of Hawaii, Commission on Water Resource Management, 2008d; USGS 2001b)	
Figure 3-3. Location of diversions, irrigation systems, USGS gaging stations, and selected ungaged sites in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, n.d.; 1996, 2004c; 2005; USGS 2001b)	37
Figure 3-4. Cumulative departures of monthly mean flow from the mean of the monthly flows, Hawaii. This data is based on complete water years from 1913 through 2002. (Oki, 2004, Figure 4).	
Figure 4-1. Elevational profile of a terminal-estuary stream on the Big Island of Hawaii (Hakalau Stream). (Source: McRae, 2007, adapted from Nishimoto and Kuamoo, 1991 [with permission])	40
Figure 4-2. Relative habitat available for given relative base flow at studied streams. Relative change is the difference between natural and diverted conditions divided by natural conditions (Gingerich and Wolff, 2005)	45

Figure 4-3. Estimated habitat availability in Puohokamoa hydrologic unit (Source: Gingerich and Wolff, 2005; USGS 2001b).	51
Figure 4-4. Division of Aquatic Resource survey point in Puohokamoa Stream (Source: DAR, 2009)	52
Figure 4-5. Native Hawaiian forest habitat ranges in Puohokamoa hydrologic unit (Source: U.S. Fish and Wildlife Service, n.d; USGS 2001b).	53
Figure 5-1. Public hunting areas for game mammals in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2002b)	56
Figure 5-2. Recreational points of interest for Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 1999, 2002a; 2002c; 2002d; 2004a; USGS 2001b)	57
Figure 6-1. Simplified ecosystem illustrated in a Hawaiian stream. (Source: Ziegler, 2002, illustration by Keith Kruger).	58
Figure 6-2. Reserves and wetlands for the Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2003; 2007b; USGS 2001b).	63
Figure 6-3. Distribution of native and alien plant species for Puohokamoa hydrologic unit (Source: Jacobi, 1989; Scott et al., 1986; State of Hawaii, Office of Planning, 1992, 2004b; 2004d; USGS 2001b).	64
Figure 6-4. Critical plant habitats, and density of threatened and endangered plant species for Puohokamoa hydrologic unit (Source: Jacobi, 1989; Scott et al., 1986; State of Hawaii, Office of Planning, 1992, 2004b; 2004d; USGS 2001b)	65
Figure 7-1. Aesthetic points of interest for the Puohokamoa hydrologic unit (Source: USGS, 1996; 2001b)	67
Figure 10-1. Water quality standards for the Puohokamoa hydrologic unit. (Source: State of Hawaii, Office of Planning, 2002e; 2008). The classifications are general in nature and should be used in conjunction with Hawaii Administrative Rules, Chapter 11-54, Water Quality Standards.	75
Figure 12-1. Generalized process for determining appurtenant water rights. This process is generalized and may not fully explain all possible situations. It does not apply to Hawaiian Homes Lands. If you are Native Hawaiian you may have other water rights.	80
Figure 12-2. Traditional ahupuaa boundaries in the vicinity of Puohokamoa hydrologic unit. This hydrologic unit spans three ahupuaa — East Makaiwa, Honomanu, Haiku Uka, and Kalialinui (Source: State of Hawaii, Office of Planning, 2007a; USGS 2001b)	95
Figure 12-3. Land ownership in Puohokamoa hydrologic unit (Source: County of Maui, 2006; USGS 2001b).	96
Figure 13-1. Estimated recharge for six historical periods between 1926 and 2004, central and west Maui, Hawaii (Source: Engott and Vana, 2007)	115
Figure 13-2. Summary of estimated recharge, in million gallons per day, for various land-use and rainfall conditions in the Lihue Basin, Kauai, Hawaii (Source: Izuka et. al., 2005)	116
Figure 13-3. East Maui Irrigation System.	119
Figure 13-4. East Maui Water License Areas	122
Figure 13-5. Value of crop sales for sugar, pineapple and other crops from 1980 to 2005 (Source: DBEDT, 2006).	125
Figure 13-6. Daily ditch flow and 30-day moving average for Wailoa Ditch at Honopou (Source: EMI, 2009).	129
Figure 13-7. Daily ditch flow and 30-day moving average for New Hamakua Ditch at Honopou (Source: EMI, 2009)	130
Figure 13-8. Daily ditch flow and 30-day moving average for Lowrie Ditch at Honopou (Source: EMI, 2009).	130

Figure 13-9. Daily ditch flow and 30-day moving average for Haiku Ditch at Honopou (Source: EMI, 2009)	131
Figure 13-10. Individual and cumulative 30-day moving averages for Wailoa, New Hamakua, Lowrie and Haiku Ditches at Honopou, including estimated range of water use by HC&S (Source: EMI, 2009; HC&S 2009)	132
Figure 13-11. Map of the Kula Agricultural Park (Source: Maui OED, n.d.).	136
Figure 13-12. Maui DWS Upcountry District and its sub-districts (colored) overlaid on the Makawao-Pukalani-Kula Community Plan District boundaries (outlined) (Source: County of Maui, DWS, 2009)	141
Figure 13-13. Maui DWS historical metered consumption for the Upcountry District, including Haiku (Source: Maui DWS, 2009)	143
Figure 13-14. Historical monthly water consumption by use class code for the Makawao-Pukalani- Kula Community Plan District, Maui (Source: Maui DWS, 2007d)	144
Figure 13-15. Maui DWS metered consumption for the Upcountry District by sub-division, excluding the Haiku sub-division (Source: Maui DWS, 2009)	144
Figure 13-16. Monthly production of water treatment facilities in the Upcountry System (Source: Maui DWS, 2009).	145
Figure 13-17. Actual and projected water demands of all metered use classes for the Upcountry District, Maui (Source: Maui DWS, 2007d).	146
Figure 13-18. A simplified schematic of the Maui DWS Upcountry System and the EMI System, and the system users	148
Figure 13-19. All registered diversions and EMI minor diversions identified in the Puohokamoa hydrologic unit (Source: East Maui Irrigation Company, 1970; State of Hawaii, Commission on Water Resource Management, 2008f; USGS 2001b).	149
Figure 13-20. Potential agricultural land use for the Puohokamoa hydrologic unit based on the ALISH and ALUM classification systems (Source: State of Hawaii, Office of Planning, 1977; 1980; USGS 2001b)	150
Figure 13-21. Simplified schematic of the EMI System.	151

## List of Tables

Table 2-1. Area and percentage of surface geologic features for Puohokamoa hydrologic unit	11
Table 2-2. Area and percentage of soil types for the Puohokamoa hydrologic unit.	12
Table 2-3. Fog drip to rainfall ratios for the windward slopes of Mauna Loa on the island of Hawaii.	14
Table 2-4. C-CAP land cover classes and area distribution in Puohokamoa (Source: National Oceanographic and Atmospheric Agency, 2000)	16
Table 2-5. HI-GAP land cover classes and area distribution in Puohokamoa (Source: HI-GAP, 2005)	16
Table 2-6. Drought risk areas for Maui (Source: University of Hawaii, 2003)	18
Table 3-1. Summary of ground water use reporting in the island of Maui (Source: State of Hawaii, Commission on Water Resource Management, 2008c)	27
Table 3-2. Information on the location of USGS continuous-record stream gaging stations in the hydrologic unit of Puohokamoa (Source: Gingerich, 1999b)	28
Table 3-3. Information from selected USGS surface water gaging stations in the hydrologic unit of Puohokamoa (Source: Gingerich, 1999b)	28
Table 3-4. General information and flow-duration characteristics of USGS stream gaging station on         the east branch of Puohokamoa Stream, Maui (station 16542000).	30
Table 3-5.       General information and flow-duration characteristics of USGS stream gaging station on         the middle branch of Puohokamoa Stream, Maui (station 16543000).	30
Table 3-6. General information and flow-duration characteristics of USGS stream gaging station on         the west branch of Puohokamoa Stream, Maui (station 16544000).	30
Table 3-7. General information and flow-duration characteristics of USGS stream gaging station on         Puohokamoa Sream above Spreckels Ditch, Maui (station 16545000).	31
Table 3-8.       Selected estimated median and low-flow characteristics for continuous-record sites in         Puohokamoa, Maui, Hawaii (Gingerich, 2005, Table 2)	31
Table 3-9. Stream flow statistics estimated using regression equations, lower and upper confidence intervals, standard errors, measured flows, and relative errors for continuous-record sites in Puohokamoa (Gingerich, 2005, Table 9).	32
Table 3-10. Stream flow statistics estimated using regression equations, lower and upper confidence intervals, standard errors, measured flow, and relative errors for ungaged site in Puohokamoa (Gingerich, 2005, Table 10).	33
Table 3-11. Estimates of natural (undiverted) streamflow statistics for gaged and ungaged sites in         Puohokamoa (Source: Gingerich, 2005, Table 11).	34
Table 3-12. Estimates of diverted stream flow statistics and percent flow reduction for gaged and ungaged sites in Puohokamoa (Source: Gingerich, 2005, Table 12).	34
Table 4-1. List of commonly mentioned native stream organisms and their generalized distribution within natural undiverted streams. (Source: State of Hawaii, Division of Aquatic Resources, 1993; Ford et al., 2009).	39
Table 4-2. Hawaii Stream Assessment categorization of aquatic resources in Puohokamoa         Stream.	43
Table 4-3. Summary of estimated aquatic habitat distribution at diverted base flow relative to natural conditions, calculated using GIS from Gingerich and Wolff (2005).	45
Table 4-4. Summary of relative base flow and available habitat in Puohokamoa Stream (Source:         Gingerich and Wolff, 2005, Table 10).	46
Table 4-5. Known distribution of amphidromous species in east Maui streams (Ford et. al., 2009, Table 3)	48

Table 4-6. Distribution of amphidromous species in lower, middle, and upper reaches of east Maui streams within the USGS stydt area summarized from USGS and DAR sources. (Source:	10
Ford et. al., 2009, Table 4)	
Table 5-1. Hawaii Stream Assessment survey of recreational opportunities by type of experience	
Table 6-1. Hawaii Stream Assessment indicators of riparian resources for Puohokamoa Stream	59
Table 6-2. Management areas located within Puohokamoa hydrologic unit. (Source: State of Hawaii, Division of Forestry and Wildlife, 2008a; State of Hawaii, Office of Planning, 2007b).	60
Table 6-3. Watershed partnerships associated with Puohokamoa hydrologic unit. (Source: State of Hawaii, Division of Forestry and Wildlife, 2008b; East Maui Watershed Partnership, 1993).	60
Table 6-4. Wetland classifications for Puohokamoa hydrologic unit (Source: U.S. Fish and Wildlife Service, 1978).	61
Table 6-5. Distribution of native and alien plant species for Puohokamoa hydrologic unit. (Source:         Jacobi, 1989).	61
Table 6-6. Percentage of critical habitat areas for Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2004b).	61
Table 6-7. Density of threatened and endangered plants for Puohokamoa hydrologic unit.         (Source: State of Hawaii, Office of Planning, 1992).	61
Table 6-8. Estimated Net Present Value (NPV) for Koolau (Oahu) Forest Amenities (Source:         Kaiser, B. et al., n.d.).	62
Table 12-1. Tax map key parcels with associated Land Commission Awards for the Puohokamoa           hydrologic unit.	81
Table 12-2. Summary of the 2001 testimonies submitted by NHLC related to taro cultivation	82
Table 12-3. Summary of water use calculated from loi and loi complexes by island, State of Hawaii         (Source: Gingerich et al., 2007, Table 10).	85
Table 12-4. Summary of discharge measurements and areas for selected loi complexes, Island of         Maui (Source: Gingerich et al., 2007, Table 6).	86
Table 12-5.       Water-temperature statistics based on measurements collected at 15-minute intervals for loi complexes on the Island of Maui (Source: Gingerich et al., 2007, Table 7).	87
Table 12-6. Summary of the 2001 testimonies submitted by NHLC related to gathering practices	88
Table 12-7. Cultural resource elements evaluated as part of the Hawaii Stream Assessment for         Puohokamoa Stream.	92
Table 13-1. Registered diversions in the Puohokamoa hydrologic unit	98
Table 13-2. Minor diversions on the EMI System in the Puohokamoa hydrologic unit	106
Table 13-3. Historic Timeline of the East Maui Irrigation System (Source: Wilcox, 1996)	118
Table 13-4. Terms of last license, before they became revocable permits	121
Table 13-5. Percentage of water yield from the four license areas (as of 1972).	121
Table 13-6. Current revocable permits issued to A&B/EMI.	123
Table 13-7. Summary of sugar-related harvests by HC&S for 2000-2008 (Source: A&B, 2002; 2003; 2005; 2007, 2009)	125
Table 13-8. Scenarios modeled with IWREDSS that focuses on crop cycle changes, and average         IRR in gallons per acre per day (gad) for sugarcane cultivated in all 188 fields for each         scenario.	128
Table 13-9. Scenarios modeled with IWREDSS that focuses on seasonal changes, and average IRR in gallons per acre per day (gad) for sugarcane cultivated in all 188 fields for each scenario.	128

Table 13-10. Summary of A&B's agribusiness revenues for 2000 to 2008 (Source: A&B, 2002; 2005; 2007; 2009)	133
Table 13-11. Summary of MLP's revenues and operating losses for 1999 to 2006 (Source: MLP,2002; 2004; 2005; 2007).	135
Table 13-12. DWS metered consumption for the Kula Agricultural Park (Source: Maui DWS, 2009)	137
Table 13-13.       Number of farms and estimated land area for the different types of crops and livestock in Maui (Source: County of Maui, DWS, 2009)	142
Table 13-14. Estimated counts and water needs for cattle and other livestock for cattle operations in Maui (Source: Maui Farm Bureau and OED, 2009).	142

# Acronyms and Abbreviations

A&B	Alexander & Baldwin
AG	agricultural
ALISH	Agricultural Lands of Importance to the State of Hawaii
ALUM	agricultural land use maps [prepared by HDOA]
BFQ	base flow statistics
BLNR	Board of Land and Natural Resources (State of Hawaii)
C-CAP	Coastal Change Analysis Program
cfs	cubic feet per second
Code	State Water Code (State of Hawaii)
COM	commercial
Commission	Commission on Water Resource Management (DLNR)
CPRC	Compilation of Public Review Comments (PR-2008-07, CWRM)
CWA	Clean Water Act (EPA)
CWRM	Commission on Water Resource Management (State of Hawaii)
DAR	Division of Aquatic Resources (State of Hawaii)
DBEDT	Department of Business, Economic Development and Tourism (State of Hawaii)
DHHL	Department of Hawaiian Home Lands (State of Hawaii)
DLNR	Department of Land and Natural Resources (State of Hawaii)
DOH	Department of Health (State of Hawaii)
DWS	Department of Water Supply (County of Maui)
EA	Environmental Assessment
EIS	Environmental Impact Statement
EMI	East Maui Irrigation Company
EMWP	
	East Maui Watershed Partnership
EPA	United States Environmental Protection Agency
FEMA	Federal Emergency Management Agency (Department of Homeland Security)
FILEREF	File Reference [in the Commission's records of registered diversions]
ft	feet
gad	gallons per acre per day
GIS	Geographic Information Systems
G.L.	Government Lease
GOV	government
gpm	gallons per minute
Gr.	Grant
HAR	Hawaii Administrative Rules
HC&S	Hawaiian Commercial and Sugar Company
HDOA	State Department of Agriculture (State of Hawaii)
HI-GAP	Hawaii Gap Analysis Program
HOT	hotel
HRS	Hawaii Revised Statutes
HSA	Hawaii Stream Assessment
IFS	instream flow standard
IFSAR	Instream Flow Standard Assessment Report
-	·
	industry
	irrigation requirements
IWREDSS	Irrigation Water Requirement Estimation Decision Support System
LCA	Land Commission Award
LUC	Land Use Commission (State of Hawaii)
MECO	Maui Electric Company
MF	multi-family residential
mgd	million gallons per day
mi	mile

MLP	Maui Land and Pineapple Company, Inc.
MOU	Memorandum of Understanding
na	not available
NAWQA	National Water Quality Assessment (USGS)
NHLC	Native Hawaiian Legal Corporation
NIR	net irrigation requirements
NPDES	National Pollutant Discharge Elimination System
NPV	Net Present Value
NRCS	Natural Resource Conservation Service (USDA)
NVCS	National Vegetation Classification System
OED	Office of Economic Development (County of Maui)
Park	Kula Agricultural Park
por.	Portion
REL	religious
RMT	R.M. Towill Corporation
SCS	Soil Conservation Service (United States Department of Agriculture)
	Note: The SCS is now called the Natural Resources Conservation Service (NRCS)
SF	single family residential
SPI	Standardized Precipitation Index
sq mi	square miles
TFQ	total flow statistics
TFQ <sub>50</sub>	50 percent exceedence probability
TFQ <sub>90</sub>	90 percent exceedence probability
TMDL	Total Maximum Daily Load
ТМК	Tax Map Key
UHERO	University of Hawaii's Economic Research Organization
USDA	United States Department of Agriculture
USFWS	United States Fish and Wildlife Service (Department of the Interior)
USGS	United States Geological Survey (Department of the Interior)
WQS	Water Quality Standards
WRPP	Water Resource Protection Plan (Commission on Water Resource Management)
WTF	water treatment facility

### 1.0 Introduction

#### 1.1 General Overview

The hydrologic unit of Puohokamoa is located north of the East Maui Volcano (Haleakala), which forms the eastern part of the Hawaiian island of Maui (Figure 1-3). It covers an area of 3.15 square miles<sup>1</sup> from the intermediate slopes of Haleakala at about 5,600 feet elevation<sup>2</sup> to the sea (Figure 1-4). Puohokamoa Stream splits into three branches (west, middle, and east branch) 4.4 miles from the coast at 2,100 feet elevation; the longest is the middle branch that is headed at the 4,400 feet altitude 6.4 miles inland (Gingerich, 1999b). The stream rises from sea level to the 600 feet altitude 0.6 miles from the coast, contributing to a slope gradient of 930 feet per mile (Gingerich, 1999b). Most of the hydrologic unit is conservation lands. Landcover consists of native-dominated forests and wetlands (Figure 1-6), part of which is the Koolau Forest Reserve that cover slopes between the 500 and 3,000 feet altitudes. The lower elevations are dominated by alien vegetation.

#### 1.2 Current Instream Flow Standard

The current interim instream flow standard (IFS) for Puohokamoa Stream was established by way of Hawaii Administrative Rules (HAR) §13-169-44, which, in pertinent part, read as follows:

<u>Interim instream flow standard for East Maui</u>. The Interim Instream Flow Standard for all streams on East Maui, as adopted by the commission on water resource management on June 15, 1988, shall be that amount of water flowing in each stream on the effective date of this standard, and as that flow may naturally vary throughout the year and from year to year without further amounts of water being diverted offstream through new or expanded diversions, and under the stream conditions existing on the effective date of the standard.

The current interim IFS became effective on October 8, 1988. Streamflow was not measured on that date; therefore, the current interim IFS is not a measurable value.

#### 1.3 Instream Flow Standards

Under the State Water Code (Code), Chapter 174C, Hawaii Revised Statutes (HRS), the Commission on Water Resource Management (Commission) has the responsibility of establishing IFS on a stream-bystream basis whenever necessary to protect the public interest in the waters of the State. Early in its history, the Commission recognized the complexity of establishing IFS for the State's estimated 376 perennial streams and instead set interim IFS at "status quo" levels. These interim IFS were defined as the amount of water flowing in each stream (with consideration for the natural variability in stream flow and conditions) at the time the administrative rules governing them were adopted in 1988 and 1989.

The Hawaii Supreme Court, upon reviewing the Waiahole Ditch Contested Case Decision and Order, held that such "status quo" interim IFS were not adequate to protect streams and required the Commission to take immediate steps to assess stream flow characteristics and develop quantitative interim IFS for affected Windward Oahu streams, as well as other streams statewide. The Hawaii Supreme Court also emphasized that "instream flow standards serve as the primary mechanism by which the Commission is to

<sup>&</sup>lt;sup>1</sup> Area of the hydrologic unit is derived from the surface water hydrologic unit GIS data file (State of Hawaii, Commission on Water Resource Management, 2005c).

<sup>&</sup>lt;sup>2</sup> Elevation data is derived from the 100 foot contours GIS data file (State of Hawaii, Office of Planning, 1997) unless otherwise noted.

discharge its duty to protect and promote the entire range of public trust purposes dependent upon instream flows."

To the casual observer, IFS may appear relatively simple to establish upon a basic review of the Code provisions. However, the complex nature of IFS becomes apparent upon further review of the individual components that comprise surface water hydrology, instream uses, noninstream uses, and their interrelationships. The Commission has the distinct responsibility of weighing competing uses for a limited resource in a legal realm that is continuing to evolve. The following illustration (Figure 1-1) was developed to illustrate the wide range of information, in relation to hydrology, instream uses, and noninstream uses that should be addressed in conducting a comprehensive IFS assessment.

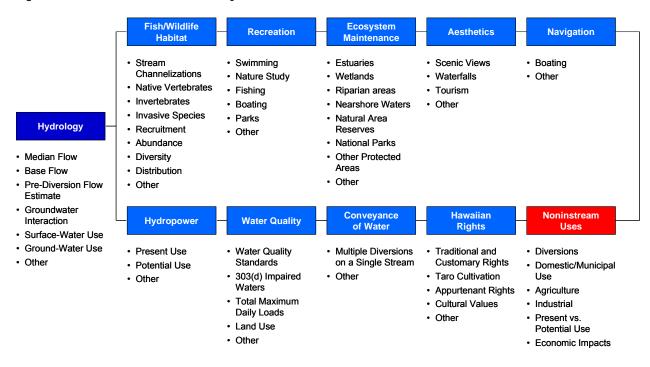


Figure 1-1. Information to consider in setting measurable instream flow standards.


#### 1.4 Interim Instream Flow Standard Process

The Code provides for a process to amend an interim IFS in order to protect the public interest pending the establishment of a permanent IFS. The Code, at §174C-71(2), describes this process including the role of the Commission to "weigh the importance of the present or potential instream values with the importance of the present or potential uses of water for noninstream purposes, including the economic impact of restricting such uses."

Recognizing the complexity of establishing measurable IFS, while cognizant of the Hawaii Supreme Court's mandate to designate interim IFS based on best available information under the Waiahole Combined Contested Case, the Commission at its December 13, 2006 meeting authorized staff to initiate and conduct public fact gathering. Under this adopted process (reflected in the left column of Figure 1-2), the Commission staff will conduct a preliminary inventory of best available information upon receipt of a petition to amend an existing interim IFS. The Commission staff shall then seek agency review and comments on the compiled information (compiled in an Instream Flow Standard Assessment Report) in conjunction with issuing a public notice for a public fact gathering meeting. Shortly thereafter (generally

within 30 days), the Commission staff will conduct a public fact gathering meeting in, or near, the hydrologic unit of interest.

Figure 1-2. Simplified representation of the interim instream flow standard and permanent instream flow standard processes. Key steps of the adopted interim IFS process are depicted in the left column by the boxes drawn with dotted lines.

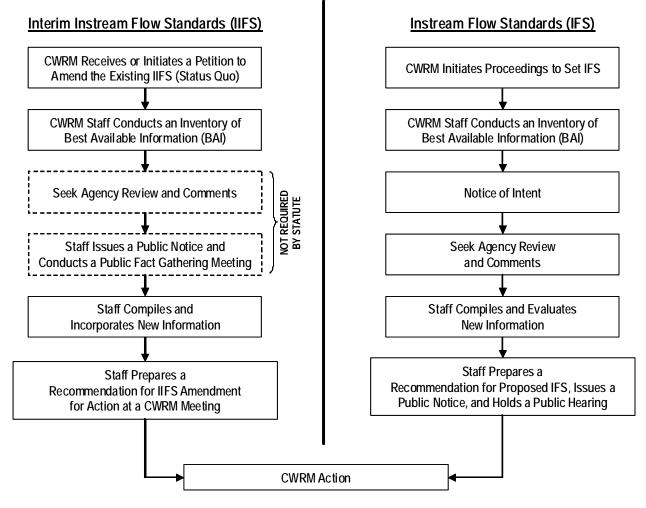

#### 1.5 Instream Flow Standard Assessment Report

The Instream Flow Standard Assessment Report (IFSAR) is a compilation of the hydrology, instream uses, and noninstream uses related to a specific stream and its respective surface water hydrologic unit. The report is organized in much the same way as the elements of IFS are depicted in Figure 1-1. The purpose of the IFSAR is to present the best available information for a given hydrologic unit. This information is used to determine the interim IFS recommendations, which is compiled as a separate report. The IFSAR is intended to act as a living document that should be updated and revised as necessary, thus also serving as a stand-alone document in the event that the Commission receives a subsequent petition solely for the respective hydrologic unit.

Each report begins with an introduction of the subject hydrologic unit and the current IFS status. Section 2.0 is comprised of the various hydrologic unit characteristics that, both directly and indirectly, impact surface water resources. Section 3.0 contains a summary of available hydrologic information, while Sections 4.0 through 12.0 summarize the best available information for the nine instream uses as defined by the Code. Noninstream uses are summarized in Section 13.0. Maps are provided at the end of each section to help

illustrate information presented within the section's text or tables. Finally, Section 14.0 provides a comprehensive listing of cited references and is intended to offer readers the opportunity to review IFSAR references in further detail.

Following the preparation of the IFSAR and initial agency and public review, information may be added to the IFSAR at any time. Dates of revision will be reflected as such. Future review of the IFSAR, by agencies and the public, will only be sought when a new petition to amend the interim (or permanent) instream flow standard is pending. Recommendations for IFS amendments are prepared separately as a stand-alone document. Thus, the IFSAR acts solely as a compendium of best available information and may be revised further without the need for subsequent public review following its initial preparation.

#### 1.6 Surface Water Hydrologic Units

Early efforts to update the Commission's Water Resource Protection Plan (WRPP) highlighted the need for surface water hydrologic units to delineate and codify Hawaii's surface water resources. Surface water hydrologic units served as an important first-step towards improving the organization and management of surface water information that the Commission collects and maintains, including diversions, stream channel alterations, and water use.

In developing the surface water hydrologic units, the Commission staff reviewed various reports to arrive at a coding system that could meet the requirements for organizing and managing surface water information in a database environment, and could be easily understood by the general public and other agencies. For all intents and purposes, surface water hydrologic units are synonymous with watershed areas. Though Commission staff recognized that while instream uses may generally fall within a true surface drainage area, noninstream uses tend to be land-based and therefore may not always fall within the same drainage area.

In June 2005, the Commission adopted the report on surface water hydrologic units and authorized staff to implement its use in the development of information databases in support of establishing IFS (State of Hawaii, Commission on Water Resource Management, 2005a). The result is a surface water hydrologic unit code that is a unique combination of four digits. This code appears on the cover of each IFSAR above the hydrologic unit name.

#### 1.7 Surface Water Definitions

Listed below are the most commonly referenced surface water terms as defined by the Code.

- Agricultural use. The use of water for the growing, processing, and treating of crops, livestock, aquatic plants and animals, and ornamental flowers and similar foliage.
- Channel alteration. (1) To obstruct, diminish, destroy, modify, or relocate a stream channel; (2) To change the direction of flow of water in a stream channel; (3) To place any material or structures in a stream channel; and (4) To remove any material or structures from a stream channel.
- Continuous flowing water. A sufficient flow of water that could provide for migration and movement of fish, and includes those reaches of streams which, in their natural state, normally go dry seasonally at the location of the proposed alteration.
- Domestic use. Any use of water for individual personal needs and for household purposes such as drinking, bathing, heating, cooking, noncommercial gardening, and sanitation.
- Ground water. Any water found beneath the surface of the earth, whether in perched supply, dike-confined, flowing, or percolating in underground channels or streams, under artesian pressure or not, or otherwise.

Hydrologic unit. A surface drainage area or a ground water basin or a combination of the two.

Impoundment. Any lake, reservoir, pond, or other containment of surface water occupying a bed or depression in the earth's surface and having a discernible shoreline.

Instream Flow Standard. A quantity of flow of water or depth of water which is required to be present at a specific location in a stream system at certain specified times of the year to protect fishery, wildlife, recreational, aesthetic, scenic, and other beneficial instream uses.

Instream use. Beneficial uses of stream water for significant purposes which are located in the stream and which are achieved by leaving the water in the stream. Instream uses include, but are not limited to:

- (1) Maintenance of fish and wildlife habitats;
- (2) Outdoor recreational activities;
- (3) Maintenance of ecosystems such as estuaries, wetlands, and stream vegetation;
- (4) Aesthetic values such as waterfalls and scenic waterways;
- (5) Navigation;
- (6) Instream hydropower generation;
- (7) Maintenance of water quality;
- (8) The conveyance of irrigation and domestic water supplies to downstream points of diversion; and(9) The protection of traditional and customary Hawaiian rights.
- Interim instream flow standard. A temporary instream flow standard of immediate applicability, adopted by the Commission without the necessity of a public hearing, and terminating upon the establishment of an instream flow standard.
- Municipal use. The domestic, industrial, and commercial use of water through public services available to persons of a county for the promotion and protection of their health, comfort, and safety, for the protection of property from fire, and for the purposes listed under the term "domestic use."
- Noninstream use. The use of stream water that is diverted or removed from its stream channel and includes the use of stream water outside of the channel for domestic, agricultural, and industrial purposes.
- Reasonable-beneficial use. The use of water in such a quantity as is necessary for economic and efficient utilization, for a purpose, and in a manner which is both reasonable and consistent with the state and county land use plans and the public interest.
- Stream. Any river, creek, slough, or natural watercourse in which water usually flows in a defined bed or channel. It is not essential that the flowing be uniform or uninterrupted. The fact that some parts of the bed or channel have been dredged or improved does not prevent the watercourse from being a stream.
- Stream channel. A natural or artificial watercourse with a definite bed and banks which periodically or continuously contains flowing water. The channel referred to is that which exists at the present time, regardless of where the channel may have been located at any time in the past.

Stream diversion. The act of removing water from a stream into a channel, pipeline, or other conduit. Stream reach. A segment of a stream channel having a defined upstream and downstream point.

- Stream system. The aggregate of water features comprising or associated with a stream, including the stream itself and its tributaries, headwaters, ponds, wetlands, and estuary.
- Surface water. Both contained surface water--that is, water upon the surface of the earth in bounds created naturally or artificially including, but not limited to, streams, other watercourses, lakes, reservoirs, and coastal waters subject to state jurisdiction--and diffused surface water--that is, water occurring upon the surface of the ground other than in contained water bodies. Water from natural springs is surface water when it exits from the spring onto the earth's surface.
- Sustainable yield. The maximum rate at which water may be withdrawn from a water source without impairing the utility or quality of the water source as determined by the Commission.
- Time of withdrawal or diversion. In view of the nature, manner, and purposes of a reasonable and beneficial use of water, the most accurate method of describing the time when the water is withdrawn or diverted, including description in terms of hours, days, weeks, months, or physical, operational, or other conditions.

Watercourse. A stream and any canal, ditch, or other artificial watercourse in which water usually flows in a defined bed or channel. It is not essential that the flowing be uniform or uninterrupted.

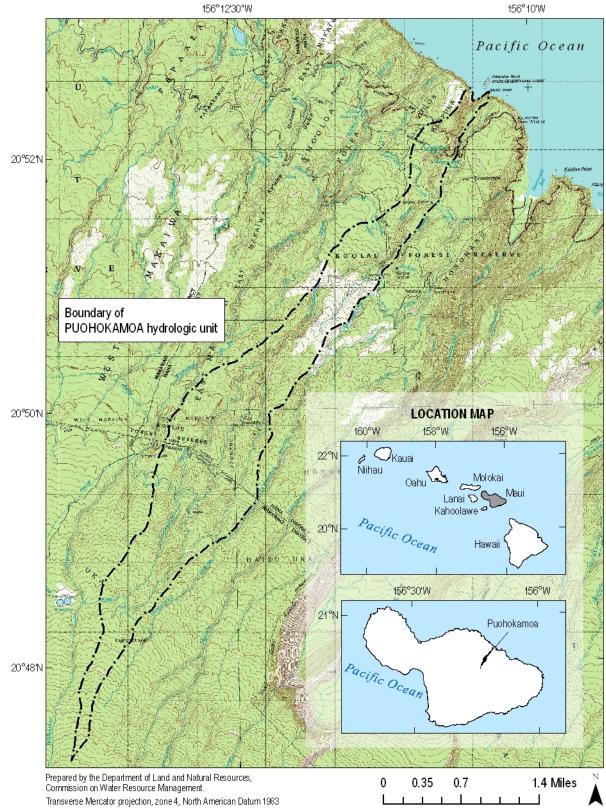


Figure 1-3. Topographic map of the Puohokamoa hydrologic unit in east Maui, Hawaii (Source: USGS, 1996).


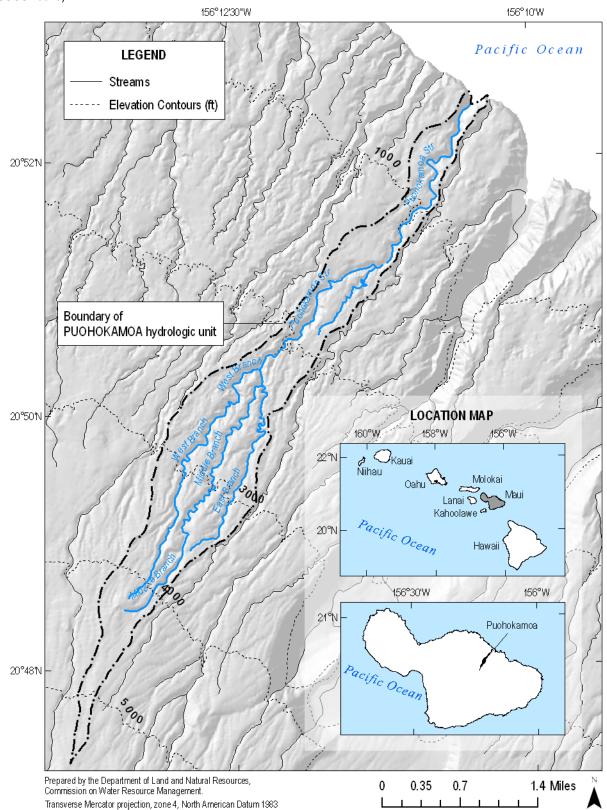


Figure 1-4. Elevation range and the location of Puohokamoa hydrologic unit. (Source: State of Hawaii, Office of Planning, 1983; USGS 2001b).

Figure 1-5. Major and minor roads and Tax Map Key (TMK) parcel boundaries for Puohokamoa hydrologic unit (Source: County of Maui, 2006; County of Maui, Geographic Information Systems [GIS] Division, Department of Management, 2006; USGS 2001b).

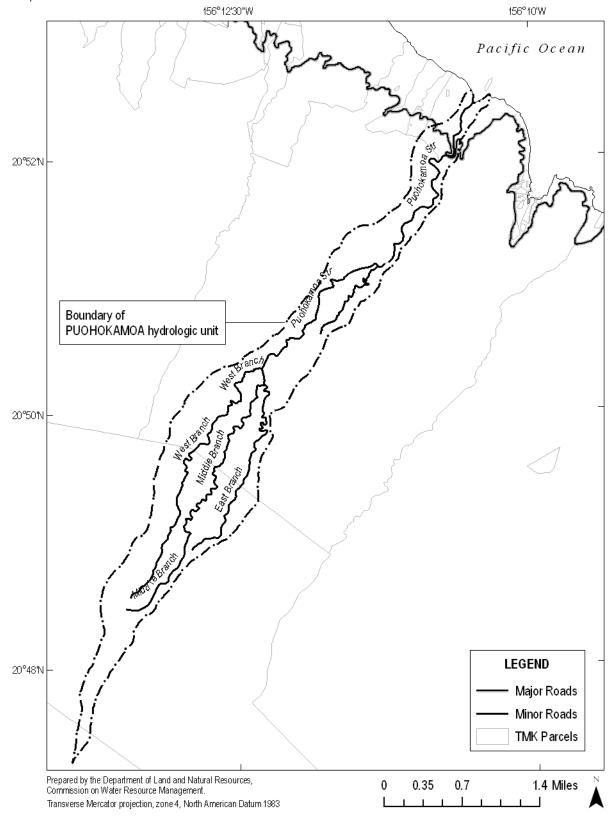

156°12'30"W 156°10'W Pacific Ocean 20°52'N Boundary of PUOHOKAMOA hydrologic unit LOCATION MAP 20°50'N 160°W 158°W 156°W ¦∕⊂ Niihau 22°N Molokai Oahu Lanai O Solaria Kahoolawe Maui Pacific Ocean 20°N Hawaii 156°W 156°30'W 21°N Puohokamoa Pacific Ocean 20°48'N Prepared by the Department of Land and Natural Resources, Ν 0 0.35 0.7 1.4 Miles Commission on Water Resource Management. Transverse Mercator projection, zone 4, North American Datum 1983

Figure 1-6. Quickbird satellite imagery of Puohokamoa hydrologic unit (Source: County of Maui, Planning Department, 2004; USGS 2001b).

## 2.0 Unit Characteristics

#### 2.1 Geology

Puohokamoa hydrologic unit has a land area of about 3.15 square miles, extending from the coast to inland elevation of 1,700 feet above mean sea level that terminates into the slope of a cinder cone. This cinder cone, which rises to a height of about 1,900 feet, is part of an array of volcanic cones that formed during the Kula post-shield volcanism on east Maui north rift zone. Moderate to high degree of drainage integration and more entrenched stream channel suggest a relatively mature landscape development in Puohokamoa. Channel incision also uncovered sections of the oldest rock formations in East Maui, which include the Honomanu Basalt and Kula Volcanics.

The Honomanu Basalt is the oldest volcanic formation exposed on the walls of deeply eroded gulches and coastal cliffs on the north flank of Haleakala Volcano. This succession of thin-bedded lava flow deposits (Stearns, 1985), was part of the late shield-building stage on east Maui (Stearns and MacDonald, 1942), but most likely erupted about 1.1 to 0.97 Ma<sup>3</sup> (Chen and others, 1991). It consists mainly of pahoehoe<sup>4</sup> lavas (Sherrod and others, 2007), although aa<sup>5</sup> members may also be found within the formation. Compositionally, Honomanu Basalt displays a characteristic transition from tholeiitic to alkalic lavas, suggesting that shield-building volcanic episode was gradually followed by post-shield magmatic activities that commenced with the emplacement of Kula volcanics.

The production of lavas with a higher total alkali content marked the onset of post-shield volcanic stage of the Haleakala Volcano, commencing with the eruption of Kula Volcanics from the southwest and east rift zones from 0.95 to 0.15 Ma (Sherrod and others, 2003). Kula volcanics form a thick mantle of mostly aa lavas flow deposits and are widely distributed on the north flank of Haleakala, where it piled up to 1 kilometer thick near the summit area (Sherrod and others, 2007). Kula Volcanics were also generated from cinder cones that clustered along the north rift zone (Stearns and Macdonald, 1942). Thus, lava sequences maybe found occasionally interstratified with ash and intimately associated with cinder cones deposits. Long reposes and depositional intervals promote the development of weathered horizons within Kula sequence.

Almost all of Punalau is directly underlain by Kula Volcanics and the remaining hydrologic unit drains on Honomanu Basalt. With predominance thick low permeability of aa lavas, the Kula Volcanics are generally considered the poorly permeable rocks. The underlying Honomanu is generally highly permeable that would allow storage and transmission of ground water (PR-2009-18, 10.0).

The generalized geology of the Puohokamoa hydrologic unit is described in Table 2-1 and depicted in Figure 2-2.

Symbol	Name	Rock Type	Lithology	Area (mi²)	Percent of Unit
Qkul	Kula Volcanics	Lava flows	Aa and pahoehoe	3.12	99.1
Qmnl	Honomanu Basalt	Lava flows	Pahoehoe and aa	0.02	0.7
Qkuv	Kula Volcanics	Cinder and spatter	Coarse near-vent fallout deposits	0.01	0.2

Table 2-1. Area and percentage of surface geologic features for Puohokamoa hydrologic unit.

<sup>&</sup>lt;sup>3</sup> Million years ago.

<sup>&</sup>lt;sup>4</sup> Type of lava flow deposit characterized by typically smooth billowy surface and ropy textures.

<sup>&</sup>lt;sup>5</sup> Type of lava flow deposit distinguished by its craggy surface and abundant jagged blocks.

#### 2.2 Soils

Puohokamoa consists largely of soils that are fairly permeable, except for the upper slopes where the soils are poorly drained, meaning that water does not move quickly through the soil and the soil remains wet for long periods. Along the stream course, the soils are soft and permeable. Near the coast of the hydrologic unit are well-drained soils; thus allowing rainwater to feed both streams and ground water.

The mauka section of the hydrologic unit consists of poorly drained soils of the Amalu peaty silty clay. The substratum for this type of soil is soft, weathered basic igneous rock capped by a horizontal ironstone sheet up to 1 inch thick. Permeability is restricted by the ironstone sheet, which is impermeable except for cracks, meaning rain water will infiltrate the top of the soil then move laterally until it either seeps out as springs or base flow<sup>6</sup> in streams; or reaches a more permeable soil type. The intermediate slopes surrounding the streambed consist of soils called the Honomanu-Amalu association. About 60 percent of the association are well-drained soils, occurring on the steeper slopes. The other 40 percent are poorly drained, occurring on the less sloping tops of ridges and interfluves (regions of higher land between valleys in the same hydrologic unit). Near the coast lies the Kailua silty clay soils, which are well-drained and strongly acidic in the surface layer. The soils along the course of Puohokamoa Stream continue as rough mountainous land from the headwaters to the coast. This type of soil is relatively soft and permeable to water, while those on narrow ridgetops are less permeable (U.S. Department of Agriculture, Soil Conservation Service, 1972).

The U.S. Department of Agriculture's Natural Resources Conservation Service (formerly known as the Soil Conservation Service) divides soils into hydrologic soil groups (A, B, C, and D) according to the rate at which infiltration (intake of water) occurs when the soil is wet. The higher the infiltration rate, the faster the water is absorbed into the ground and the less there is to flow as surface runoff. Group A soils have the highest infiltration rates and group D soils have the lowest. In Puohokamoa, a majority of the soils (including those of the streambed) belong to group D, indicating that the soils have low infiltration rates and are prone to surface runoff. Soils surrounding the streambed in the lower elevations are group C soils (U. S. Department of Agriculture, Natural Resources Conservation Service, Conservation Engineering Division, 1986).

		Hydrologic		
Map Unit	Description	Group	Area (mi²)	Percent of Unit
rAMD	Amalu peaty silty clay, 3 to 20 percent slopes	D	1.82	57.8
rHR	Honomanu-Amalu association	С	0.68	21.5
rRT	Rough mountainous land	D	0.52	16.6
KBID	Kailua silty clay, 3 to 25 percent slopes	С	0.13	4.1

Table 2-2. Area and percentage of soil types for the Puohokamoa hydrologic unit.

#### 2.3 Rainfall

Rainfall distribution in Puohokamoa is governed by the orographic<sup>7</sup> effect (Figure 2-1). Orographic precipitation occurs when the prevailing northeasterly trade winds lift warm air up the windward side of the mountains into higher elevations where cooler temperatures persist. As a result, frequent and heavy rainfall is observed at the windward mountain slopes. Once the moist air reaches the fog drip zone, cloud height is restricted by the temperature inversion, where temperature increases with elevation, thus favoring fog drip over rain-drop formation (Shade, 1999). Fog drip is a result of cloud-water droplets

<sup>&</sup>lt;sup>6</sup> Base flow is the flow of water into a stream from the ground from persistent, varying sources and maintains stream flow between water-input events (i.e. during periods of no rainfall).

<sup>&</sup>lt;sup>7</sup> Orographic refers to influences of mountains and mountain ranges on airflow, but also used to describe effects on other meteorological quantities such as temperature, humidity, or precipitation distribution.

impacting vegetation (Scholl et al., 2002) and it can contribute significantly to ground water recharge. The fog drip zone on the windward side of East Maui Volcano (Haleakala) extends from the cloud base level at 1,970 feet to the lower limit of the most frequent temperature inversion base height at 6,560 feet (Giambelluca and Nullet, 1992).

A majority of the mountains in Hawaii peak in the fog drip zone. In such cases, air passes over the mountains, warming and drying while descending the leeward mountain slopes. When the mountains are at elevations higher than 6,000 feet (e.g. Haleakala), climate is affected by the presence and movement of the inversion. The temperature inversion zone typically extends from 6,560 feet to 7,874 feet. This region is influenced by a layer of moist air below and dry air above, making climate extremely variable (Giambelluca and Nullet, 1992). Above the inversion zone, the air is dry and sky is frequently clear (absence of clouds) with high solar radiation, creating an arid atmosphere with little rainfall.

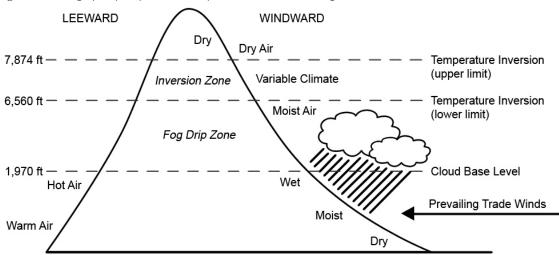


Figure 2-1. Orographic precipitation in the presence of mountains higher than 6,000 feet.

The hydrologic unit of Puohokamoa is situated on the windward flank of the East Maui Volcano. Puohokamoa receives near-daily orographic rainfall of 118 inches per year near the coast to as high as 260 inches per year in the intermediate slopes. This rainfall drops back down to 118 to 157 inches per year in the upper slopes (Giambelluca et al., 1986). The high spatial variability in rainfall is evident where the mean annual rainfall increases by about 40 inches with a 400-foot rise in elevation in the intermediate slopes of the hydrologic unit. Rainfall is highest during the months of March and April where the mean monthly rainfall across the hydrologic unit is approximately 18 inches. In April, rainfall can reach as high as 22 inches in the mountains. For the rest of the year, the mean monthly rainfall ranges from 10 inches to 16 inches. The driest months are June and September, during which an average of 5 inches of rain per month fall at the coast.

Currently, fog drip data for east Maui are very limited. Shade (1999) used the monthly fog drip to rainfall ratios for the windward slopes of Mauna Loa on the island of Hawaii (Table 2-3) to calculate fog drip contribution to the water-budget in windward east Maui. The fog drip to rainfall ratios were estimated using 1) the fog drip zone boundaries for east Maui (Giambelluca and Nullet, 1992), and 2) an illustration that shows the relationship between fog drip and rainfall for the windward slopes of Mauna Loa, island of Hawaii (Juvik and Nullet, 1995). This method was used to determine the contribution of fog drip in Puohokamoa, which was calculated by multiplying the ratios with the monthly rainfall values (Giambelluca et al., 1986). Calculations show that approximately 69 percent of Puohokamoa lies in the fog drip zone (Figure 2-4) with an estimated average annual fog drip rate of 89 inches per year. Since a

large portion of Puohokamoa lies in the fog drip zone, the contribution of fog to total rainfall is significant.

Mauna Loa on the Island of Hawall.	Ratio (%)
January-March	13
April-June	27
July-September	67
October-November	40
December	27

Table 2-3. Fog drip to rainfall ratios for the windward slopes ofMauna Loa on the island of Hawaii.

#### 2.4 Solar Radiation

Solar radiation is the sun's energy that arrives at the Earth's surface after considerable amounts have been absorbed by water vapor and gases in the Earth's atmosphere. The amount of solar radiation to reach the land surface in a given area is dependent in part upon latitude and the sun's declination angle (angle from the sun to the equator), which is a function of the time of year. Hawaii's trade winds and the temperature inversion layer greatly affect solar radiation levels, the primary heat source for evaporation. High mountain ranges block moist trade-wind air flow and keep moisture beneath the inversion layer (Lau and Mink, 2006). As a result, windward slopes tend to be shaded by clouds and protected from solar radiation, while dry leeward areas receive a greater amount of solar radiation and thus have higher levels of evaporation. In Puohokamoa, estimated daily solar radiation is about 300 calories per square centimeter near the coast and in the upper slopes. Solar radiation decreases toward the intermediate slopes, where there are more clouds (Figure 2-4).

#### 2.5 Evaporation

Evaporation is the loss of water to the atmosphere from soil surfaces and open water bodies (e.g. streams and lakes). Evaporation from plant surfaces (e.g. leaves, stems, flowers) is termed transpiration. Together, these two processes are commonly referred to as evapotranspiration, and it can significantly affect water yield because it determines the amount of rainfall that becomes streamflow. On a global scale, the amount of water that evaporates is about the same as the amount of water that falls on Earth as precipitation. However, more water evaporates from the ocean whereas on land, rainfall often exceeds evaporation. The rate of evaporation is dependent on many climatic factors including solar radiation, albedo<sup>8</sup>, rainfall, humidity, wind speed, surface temperature, and sensible heat advection<sup>9</sup>. Higher evaporation rates are generally associated with greater net radiation, high wind speed and surface temperature, and lower humidity.

A common approach to estimating evaporation is to employ a relationship between potential evaporation and the available water in the watershed. Potential evaporation is the maximum rate of evaporation if water is not a limiting factor, and it is often measured with evaporation pans. In Hawaii, pan evaporation measurements were generally made in the lower elevations of the drier leeward slopes where sugarcane was grown. These data have been compiled and mapped by Ekern and Chang (1985). Unfortunately, pan evaporation data are available only for the lower slopes of west and central Maui. This makes estimating the evaporative demand on the watersheds in windward east Maui challenging.

<sup>&</sup>lt;sup>8</sup> Albedo is the proportion of solar radiation that is reflected from the Earth, clouds, and atmosphere without heating the receiving surface.

<sup>&</sup>lt;sup>9</sup> Sensible heat advection refers to the transfer of heat energy that causes the rise and fall in the air temperature.

Most of the drainage basins in Hawaii are characterized by a relatively large portion of the rainfall leaving the basin as evaporation and the rest as streamflow (Ekern and Chang, 1985). Based on the available pan evaporation data for Hawaii, evaporation generally decreases with increasing elevation below the temperature inversion<sup>10</sup> and the cloud layer (Figure 2-1). At low elevations near the coast, pan evaporation rates are influenced by sensible heat advection from the ocean (Nullet, 1987). Pan evaporation rates are enhanced in the winter by positive heat advection from the ocean, and the opposite occurs in the summer when pan evaporation rates are diminished by negative heat advection (Giambelluca and Nullet, 1992). With increasing distance from the windward coasts, positive heat advection from dry land surfaces becomes an important factor in determining the evaporative demand at the slopes (Nullet, 1987). Shade (1999, Fig. 9) estimated pan evaporation rates of 30 inches per year below 2,000 feet elevation to 80 inches per year near the coast. Within the cloud layer, evaporation rates are particularly low due to the low solar radiation (i.e., from high cloud cover) and high humidity caused by fog drip. Pan evaporation rates drop below 30 inches per year in this area as reported in Shade (1999, Fig. 9). Near the average height of the temperature inversion, evaporation rates are highly variable as they are mainly influenced by the movement of dry air from above and moist air from below (Nullet and Giambelluca, 1990). Above the inversion, clear sky and high solar radiation at the summits cause increased evaporation, with pan evaporation rates of about 50 to 70 inches per year (Shade, 1999, Fig. 9). Ekern and Chang (1985) reported evaporation increased to 50 percent more than surface oceanic rates near the Mauna Kea crest on the island of Hawaii.

#### 2.6 Land Use

The Hawaii Land Use Commission (LUC) was established under the State Land Use Law (Chapter 205, Hawaii Revised Statutes) enacted in 1961. Prior to the LUC, the development of scattered subdivisions resulted in the loss of prime agricultural land that was being converted for residential use, while creating problems for public services trying to meet the demands of dispersed communities. The purpose of the law and the LUC is to preserve and protect Hawaii's lands while ensuring that lands are used for the purposes they are best suited. Land use is classified into four broad categories: 1) agricultural; 2) conservation; 3) rural; and 4) urban.

Land use classification is an important component of examining the benefits of protecting instream uses and the appropriateness of surface water use for noninstream uses. While some may argue that land use, in general, should be based upon the availability of surface and ground water resources, land use classification continues to serve as a valuable tool for long-range planning purposes.

As of 2006, the LUC designated 95.5 percent of the land in Puohokamoa as conservation district and the rest as agricultural district (State of Hawaii, Office of Planning, 2006d). No lands were designated as rural or urban districts. The conservation district is located in the intermediate and upper slopes of the hydrologic unit and along the coast, whereas the agricultural district lies in the lower slopes of the hydrologic unit (Figure 2-5).

#### 2.7 Land Cover

Land cover for the hydrologic unit of Puohokamoa is represented by two separate 30-meter Landsat satellite images. One of the datasets, developed by the Coastal Change Analysis Program (C-CAP), provides a general overview of the land cover types in Puohokamoa, e.g. forest, shrub land, grassland, developed areas, cultivated areas, and bare land (Table 2-4, Figure 2-6). The second is developed by the Hawaii Gap Analysis Program (HI-GAP), which mapped the National Vegetation Classification System

<sup>&</sup>lt;sup>10</sup> Temperature inversion is when temperature increases with elevation.

(NVCS) associations for each type of vegetation, creating a more comprehensive land cover dataset (Table 2-5, Figure 2-7).

Based on the two land cover classification systems, the land cover of Puohokamoa consists mainly of evergreen forests and shrub lands. A majority of the hydrologic unit is made up of native Ohia forests and uluhe shrub lands that spread throughout the lower and intermediate slopes as part of the Koolau Forest Reserve. A mixture of grasslands and alien forests are scattered throughout the hydrologic unit. The lower slopes are dominated by alien forests.

The land cover maps (Figures 2-6 and 2-7) provide a general representation of the land cover types in Puohokamoa. Given that the scale of the maps is relatively large, they may not capture the smaller cultivated lands or other vegetation occupying smaller parcels of land. Land cover types may also have changed slightly since the year when the maps were published.

Table 2-4. C-CAP land cover classes and area distribution in Puohokamoa (Source: National Oceanographic and Atmospheric
Agency, 2000).

Land Cover	Description	Area (mi²)	Percent of Unit
Evergreen Forest	Areas where more than 67 percent of the trees remain green throughout the year	2.73	86.8
Scrub/Shrub	Areas dominated by woody vegetation less than 6 meters in height	0.34	10.7
Grassland	Natural and managed herbaceous cover	0.08	2.4
Bare Land	Bare soil, gravel, or other earthen material with little or no vegetation	< 0.01	0.1
Water	Areas of open water with less than 30 percent of trees, shrubs, persistent emergent plants, or other land cover	< 0.01	0.1

Table 2-5. HI-GAP land cover classes and area distribution in Puohokamoa (Source	e: HI-
GAP. 2005).	

Land Cover	Area (mi²)	Percent of Unit
Open Ohia Forest (uluhe)	1.18	37.3
Closed Ohia Forest (native shrubs)	0.79	25.2
Alien Forest	0.75	23.7
Uncharacterized Open-Sparse Vegetation	0.20	6.2
Closed Ohia Forest (uluhe)	0.14	4.3
Uncharacterized Forest	0.05	1.7
Uluhe Shrubland	0.03	0.9
Alien Grassland	0.01	0.4
Very Sparse Vegetation to Unvegetated	0.01	0.2
Undefined	< 0.01	< 0.1

#### 2.8 Flood

Floods usually occur following prolonged or heavy rainfall associated with tropical storms or hurricanes. The magnitude of a flood depends on topography, ground cover, and soil conditions. Rain falling on areas with steep slopes and soil saturated from previous rainfall events tends to produce severe floods in low-lying areas. Four types of floods exist in Hawaii. Stream or river flooding occurs when the water level in a stream rises into the flood plain. A 100-year flood refers to the probability of the flood happening once in a hundred years, or 1 percent chance of happening in a given year. Flash floods occur within a few hours after a rainfall event, or they can be caused by breaching of a flood safety structure

such as a dam. Flash flooding is common in Hawaii because the small drainage basins often have a short response time, typically less than an hour, from peak rainfall to peak streamflow. They are powerful and dangerous in that they can develop quickly and carry rocks, mud, and debris in their path down to the coast, causing water quality problems in the near shore waters. Some floods can even trigger massive landslides, blocking off sections of a stream channel. One of the major historic flash flooding events occurred on December 5-6, 1988, when rainfall was at the average annual maximum, causing significant flash flooding in many parts of Maui (Fletcher III et al., 2002). Sheet flooding occurs when runoff builds up on previously saturated ground, flowing from the high mountain slopes to the sea in a shallow sheet (Pacific Disaster Center, 2007). Coastal flooding is the inundation of coastal land areas from excessive sea level rise associated with strong winds or a tsunami.

The Federal Emergency Management Agency (FEMA) developed maps that identify the flood-risk areas in an effort to mitigate life and property losses associated with flooding events. Based on these maps, FEMA did not identify any flood-risk zones in the hydrologic unit of Puohokamoa.

#### 2.9 Drought

Drought is generally defined as a shortage of water supply that usually results from lower than normal rainfall over an extended period of time, though it can also result from human activities that increase water demand (Giambelluca et al., 1991). The National Drought Mitigation Center (State of Hawaii, Commission on Water Resource Management, 2005b) uses two types of drought definitions — conceptual and operational. Conceptual definitions help people understand the general concept of drought. Operational definitions describe the onset and severity of a drought, and they are helpful in planning for drought mitigation efforts. The four operational definitions of drought are meteorological, agricultural, hydrological, and socioeconomic. Meteorological drought describes the departure of rainfall from normal based on meteorological measurements and understanding of the regional climatology. Agricultural drought occurs when not enough water is available to meet the water demands of a crop. Hydrological drought refers to declining surface and ground water levels. Lastly, socioeconomic drought occurs when water shortage affects the general public.

Impacts of drought are complex and can be categorized into three sectors: water supply; agriculture and commerce; and environment, public health, and safety sectors (State of Hawaii, Commission on Water Resource Management, 2005b). The water supply sector encompasses urban and rural drinking water systems that are affected when a drought depletes ground water supplies due to reduced recharge from rainfall. The agriculture and commerce sector includes the reduction of crop yield and livestock sizes due to insufficient water supply for crop irrigation and maintenance of ground cover for grazing. The environmental, public health, and safety sector focuses on wildfires that are both detrimental to the forest ecosystem and hazardous to the public. It also includes the impact of desiccating streams, such as the reduction of instream habitats for native species.

Droughts have affected the islands throughout Hawaii's recorded history. The most severe events of the past 15 years are associated with the El Niño phenomenon. In January 1998, the National Weather Service's network of 73 rain gauges throughout the State did not record a single above-normal rainfall, with 36 rain gauges recording less than 25 percent of normal rainfall (State of Hawaii, Commission on Water Resource Management, 2005b). One of the more recent drought occurred in 2000-2002, affecting all islands, especially the southeastern end of the State. During that period, east Maui streams were at record low levels and cattle losses projected at 9 million dollars (State of Hawaii, Commission on Water Resource Management, 2005b). According to the National Drought Mitigation Center (2009), the State of Hawaii has been in a severe drought condition since June 2008. The percentage of area categorized as severe drought increased from 3 percent in June to almost 55 percent in December of 2008. Drought

conditions worsened in the last three months of 2008 that about 12 percent of the State was categorized as extreme drought. Currently, 23 percent of the State is in severe drought.

With Hawaii's limited water resources and growing water demands, droughts will continue to adversely affect the environment, economy, and the residents of the State. Aggressive planning is necessary to make wise decisions regarding the allocation of water at the present time, and conserving water resources for generations to come. The Hawaii Drought Plan was established in 2000 in an effort to mitigate the long-term effects of drought. One of the projects that supplemented the plan was a drought risk and vulnerability assessment of the State, conducted by researchers at the University of Hawaii (2003). In this project, drought risk areas were determined based on rainfall variation in relation to water source, irrigated area, ground water yield, stream density, land form, drainage condition, and land use. Fifteen years of historical rainfall data were used. The Standardized Precipitation Index (SPI) was used as the drought index because of its ability to assess a range of rainfall conditions in Hawaii. It quantifies rainfall deficit for different time periods, i.e. 3 months and 12 months. Results of the study for Maui are summarized in Table 2-6. Based on the 12-month SPI, the Kula region has the greatest risk to drought impact of the Maui regions because of its dependence on surface water sources, which is limited by low rainfall. The growing population in the already densely populated area further stresses the water supply.

Table 2-6. Drought risk areas for Maui (Source: University of Hawaii, 2003).

[Drought classifications of moderate, severe, and extreme have SPI values -1.00 to -1.49, -1.50 to -1.99, and -2.00 or less, respectively]	
Drought Classification (based on 12-month SPI)	

Sector	Drought Classification (based on 12-month SPI)			
366101	Moderate	Severe	Extreme	
Water Supply	Kula, Kahului, Wailuku, Hana, Lahaina	Kula, Hana	Kula	
Agriculture and Commerce				
Environment, Public Health and Safety	Kula	Kula	Kula	

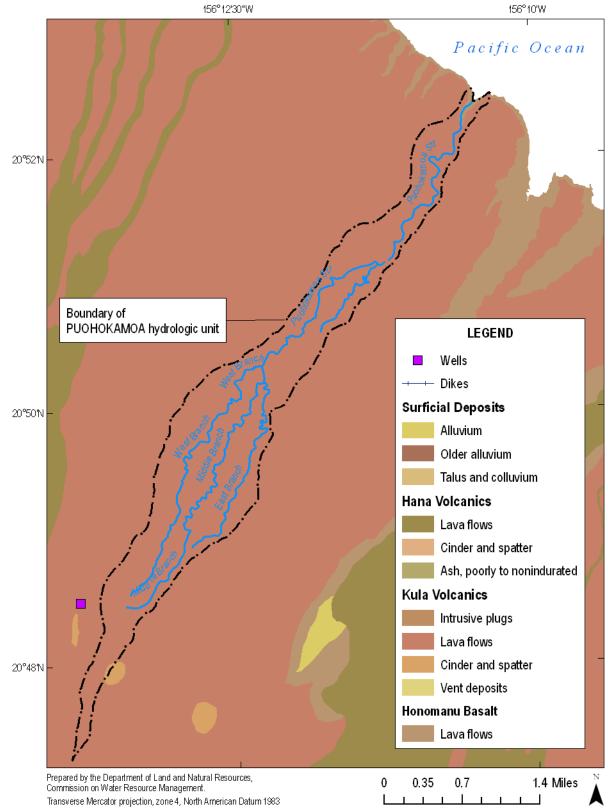


Figure 2-2. Generalized geology of Puohokamoa hydrologic unit (Source: Sherrod et al., 2007; State of Hawaii, Office of Planning, 2006a, and State of Hawaii, Commission on Water Resource Management, 2008d; USGS 2001b).

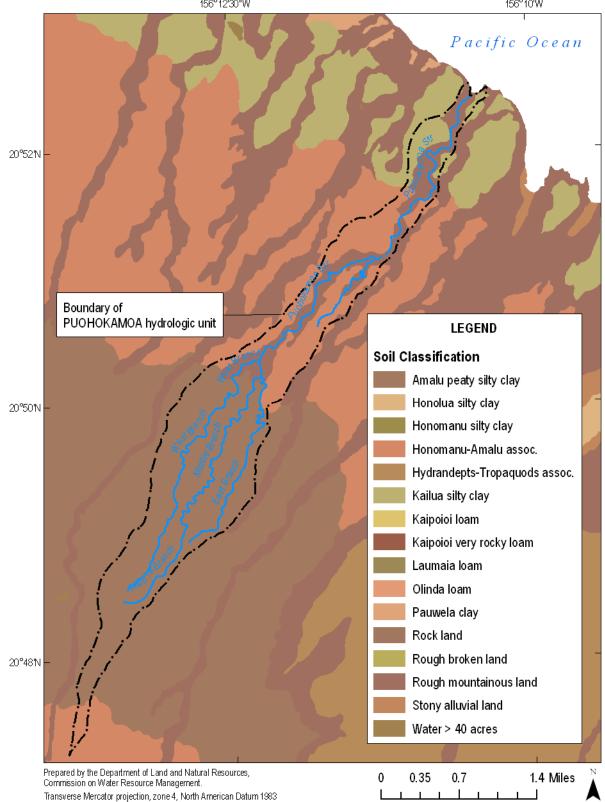

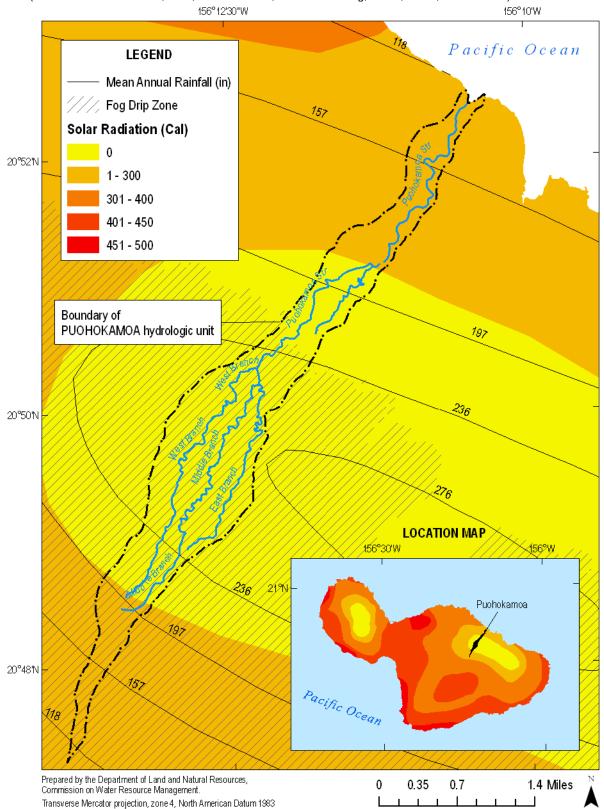


Figure 2-3. Soil classification in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2007c; USGS 2001b). 156°12'30"W 156°10'W





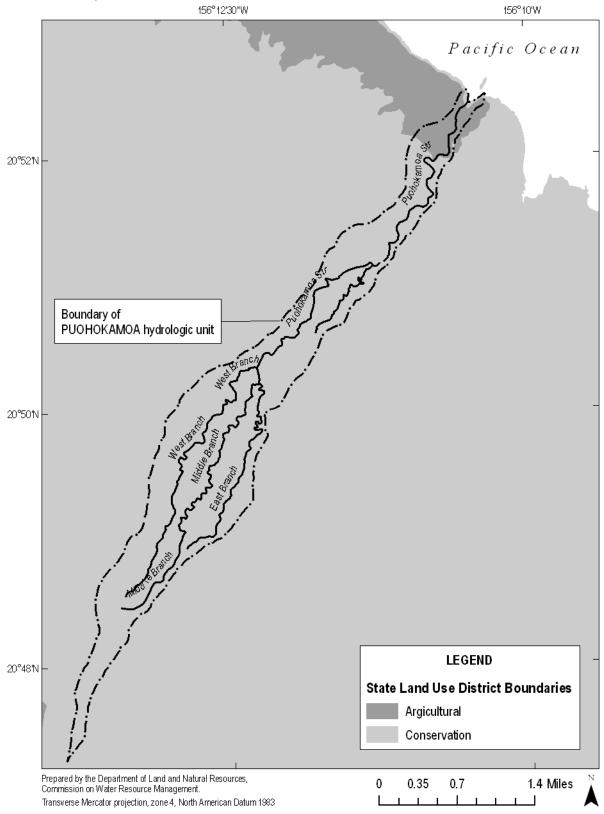


Figure 2-5. State land use district boundaries in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2006d; USGS 2001b).

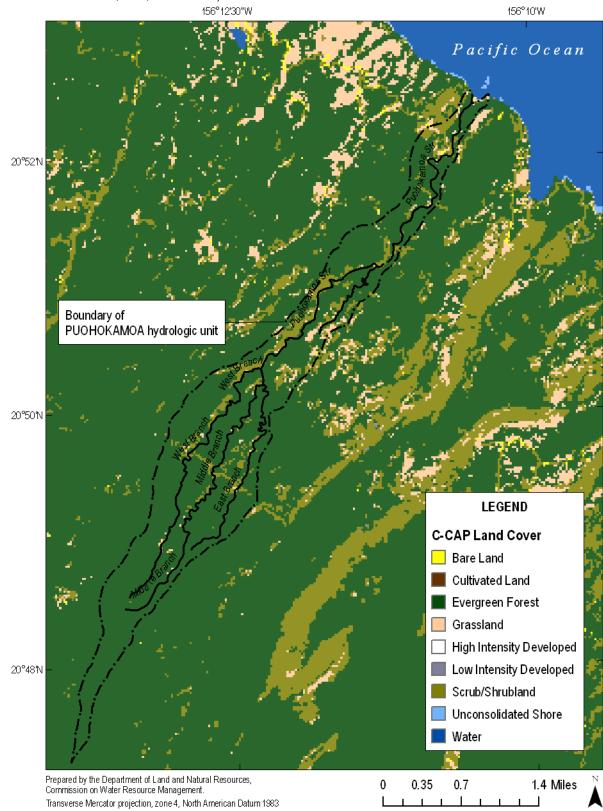


Figure 2-6. C-CAP land cover in Puohokamoa hydrologic unit (Source: National Oceanic and Atmospheric Administration, Coastal Services Center, 2000; USGS 2001b).

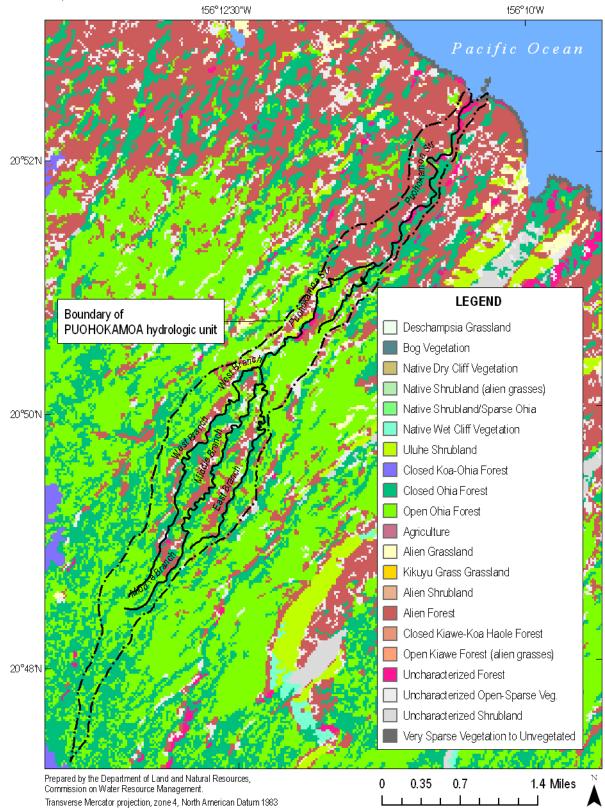


Figure 2-7. Hawaii GAP land cover classes in Puohokamoa hydrologic unit (Source: Hawaii GAP Analysis Program, 2005; USGS 2001b).

# 3.0 Hydrology

The Commission, under the State Water Code, is tasked with establishing instream flow standards by weighing "the importance of the present or potential instream values with the importance of the present or potential uses of water for noninstream purposes, including the economic impact of restricting such uses." While the Code outlines the instream and offstream uses to be weighed, it assumes that hydrological conditions will also be weighed as part of this equation. The complexity lies in the variability of local surface water conditions that are dependent upon a wide range of factors, including rainfall, geology, and human impacts, as well as the availability of such information. The following is a summary of general hydrology and specific hydrologic characteristics for Puohokamoa Stream.

## 3.1 Streams in Hawaii

Streamflow consists of: 1) direct surface runoff in the form of overland flow and subsurface flow that rapidly returns infiltrated water to the stream; 2) ground water discharge in the form of base flow; 3) water returned from streambank storage; 4) rain that falls directly on streams; and 5) additional water, including excess irrigation water discharged into streams by humans (Oki, 2003). The amount of runoff and ground water that contribute to total streamflow is dependent on different components of the hydrologic cycle<sup>11</sup>, as well as man-made structures such as diversions and other stream channel alterations (e.g. channelizations and dams).

Streams in Hawaii can either gain or lose water at different locations depending on the geohydrologic conditions. A stream gains water when the ground water table is above the streambed. When the water table is below the streambed, the stream can lose water. Where the streambed is lined with concrete or other low-permeability or impermeable material, interaction between surface water and ground water is unlikely. Whether a stream is gaining or losing flow can be determined by taking flow measurements at the endpoints of a channel reach. Another way that ground water influences streamflow is through springs. A spring is formed when a geologic structure (e.g., fault or fracture) or a topographic feature (e.g., side of a hill or a valley) intersects ground water either at or below the water table. It can discharge ground water onto the land surface, directly into the stream, or into the ocean. Figure 3-1 illustrates a valley that has been incised into a high-level water table, resulting in ground water discharges that contribute directly to streamflow and springs. At places where erosion has removed the caprock, ground water discharges either as springs or into the ocean as seepage.

## 3.2 Ground Water

Ground water is an important component of streamflow as it constitutes the base flow<sup>12</sup> of Hawaiian streams. When ground water is withdrawn from a well, the water level in the surrounding area is lowered. Pumping wells near streams commonly cause stream water to flow into the underlying ground water body, affecting the quality of ground water (LaBaugh and Rosenberry, 2008). Nearby wetlands or ponds may shrink or even dry up if the pumping rate is sufficiently high (Gingerich and Oki, 2000). The long-term effects of ground water withdrawal can include the reduction of streamflow, which may cause a

<sup>&</sup>lt;sup>11</sup> Hydrologic cycle (i.e. water cycle) represents the processes and pathways involved in the circulation of water between the atmosphere and land either on a global scale or within a hydrologic unit. The components of the hydrologic cycle include the following main processes: evaporation, precipitation, interception, transpiration, infiltration, and runoff.

<sup>&</sup>lt;sup>12</sup> Base flow is the water that enters a stream from persistent, slowly varying sources (such as the seepage of ground water), and maintains stream flow between water-input events (i.e., it is the flow that remains in a stream in times of little or no rainfall).

decrease in stream habitats for native species and a reduction in the amount of water available for irrigation. The interaction between surface water and ground water warrants a close look at the ground water recharge and demand within the State as well as the individual hydrologic units.

In Hawaii, ground water is replenished by recharge from rainfall, fog drip, and irrigation water that percolate through the plant root zone to the subsurface rock. Recharge can be captured in three major fresh ground water systems: 1) fresh water-lens system; 2) dike-impounded system; and 3) perched system. The fresh water-lens system provides the most important sources of ground water. It includes a lens-shaped layer of fresh water, an intermediate transition zone of brackish water, and underlying salt water. In northeast Maui, a vertically extensive fresh water-lens system can extend several hundreds or even thousands of feet below mean sea level. A dike-impounded system is found in rift zones and caldera of a volcano where low-permeability dikes compartmentalize areas of permeable volcanic rocks, forming high-level water bodies. On Maui, dikes impound water to as high as 3,300 feet above mean sea level. A perched system is found in areas where low-permeability rocks impede the downward movement of percolated water sufficiently to allow a water body to form in the unsaturated zone above the lowest water table (Gingerich and Oki, 2000).

The hydrologic unit of Puohokamoa lies within the Waikamoi aquifer system that has an area of 26 square miles. A general overview of the ground water occurrence and movement in this area is described in Gingerich (1999b) and illustrated in Figure 3-1. Puohokamoa Stream lies on lava flows of the Kula Volcanics for most of its length, with the exception of 3,000 feet of Honomanu Basalt near the coast (Gingerich, 1999b). Ground water is found at high elevations in the Kula Volcanics as well as a fresh water-lens system in the underlying Honomanu Basalt. A thick layer of unsaturated zone separates the high-elevation water body and the fresh water lens. The high-elevation saturated zone is not present near the coast when erosion has removed the low-permeability layers formed by the Kula Volcanics. Withdrawal from wells at or below sea level should not affect the high-elevation water table because the thick unsaturated zone will prevent any significant changes in the vertical flow gradient. However, wells that remove water from the high-elevation water body can reduce streamflow and recharge into the fresh water lens. Based on available data, there are no wells in the hydrologic unit of Puohokamoa. As of June 2008, the sustainable yield of the Waikamoi aquifer system is 40 million gallons per day with no existing ground water demand (State of Hawaii, Commission on Water Resource Management, 2008c). Estimated total ground water recharge without accounting for fog drip contribution is 85 million gallons per day, which represents 35 percent of total rainfall (Shade, 1999).

Ground water use information is only available by island. Among the major Hawaiian Islands, Maui has the second highest number of production wells following Oahu. Of the 450 productions wells in Maui, 191 are low-capacity wells with a pumping rate of less than 25 gallons per minute. Assuming all the low-capacity production wells in Maui are pumping at 1,700 gallons per day, the island-wide withdrawal rate would be 0.32 million gallons per day. The cumulative impacts of small, domestic wells become particularly important when assessing areas where municipal water is unavailable (State of Hawaii, Commission on Water Resource Management, 2008c). A majority of the reported ground water use in Maui is for agricultural (54 percent) and municipal (34 percent) uses (Table 3-1).

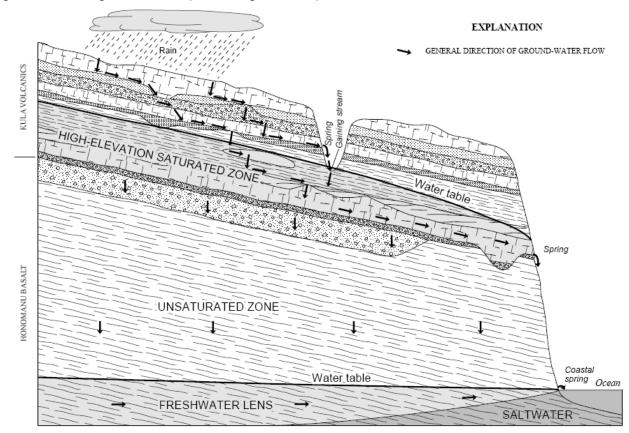


Figure 3-1. Diagram illustrating the ground water system west of Keanae Valley, northeast Maui, Hawaii. Arrows indicate general direction of ground water flow (Source: Gingerich, 1999b).

Table 3-1. Summary of ground water use reporting in the island of Maui (Source: State of Hawaii, Commission on Water Resource Management, 2008c).

galions per uay.		
Use Category	Use Rate (mgd)	Percent of Total (%)
Agriculture	48.134	53.7
Domestic	0.001	0
Industrial	1.683	1.9
Irrigation	9.611	10.7
Military	0	0
Municipal	30.172	33.7
Total	89.601	100

[Agriculture category includes water use for crops, livestock, and nursery plants; irrigation category includes water use for golf courses, landscape features, and other infrastructures. Mgd is million gallons per day.]

#### 3.3 Streamflow Characteristics

Puohokamoa Stream splits into three branches (west, middle, and east branch) 4.4 miles from the coast at 2,100 feet elevation; the longest is the middle branch that is headed at the 4,400 feet altitude 6.4 miles inland (Gingerich, 1999b). The stream rises from sea level to the 600 feet altitude 0.6 miles from the coast, contributing to a slope gradient of 930 feet per mile (Gingerich, 1999b).

One of the most common statistics used to characterize streamflow is the median value of flow in a particular time period. This statistic is also referred to as the flow at 50 percent exceedence probability, or the flow that is equaled or exceeded 50 percent of the time ( $TFQ_{50}$ ). The longer the time period that is used to determine the median flow value, the more representative the value is of the normal flow conditions in the stream. Median flow is typically lower than the mean or average flow because of the bias in higher flows, especially during floods, present when calculating the average flow. The flow at the 90 percent exceedence probability ( $TFQ_{90}$ ) is commonly used to characterize low flows in a stream. In Hawaii, the base flow is usually exceeded less than 90 percent of the time, and in many cases less than 70 percent of the time (Oki, 2003).

Six inactive USGS continuous-record stream gaging stations were located in the hydrologic unit of Puohokamoa (Figure 3-3). Refer to Table 3-2 for information on the location and status of each gaging station. Average annual streamflow, lowest daily streamflow, and average annual base flow were calculated based on data from the years with complete streamflow record, and the statistics are presented in Table 3-3. Tables 3-4 through 3-7 contain information on the location and flow-duration characteristics of the gaging stations in Puohokamoa, excepting stations 16546000 and 16547000 below Spreckels Ditch.

Table 3-2. Information on the location of USGS continuous-record stream gaging stations in the hydrologic unit of Puohokamoa (Source: Gingerich, 1999b).

Station number	Station location	Station altitude (feet)	General location description	Status
5420	East Branch Puohokamoa	2,800	Downstream from Upper Kula Pipeline	Inactive
5430	Middle Branch Puohokamoa	2,900	Downstream from Upper Kula Pipeline	Inactive
5440	West Branch Puohokamoa	2,800	Downstream from Upper Kula Pipeline	Inactive
5450	Puohokamoa Stream	1,322	Upstream from Spreckels Ditch	Inactive
5460	Puohokamoa Stream	1,300	Between Wailoa (Koolau) and Spreckels Ditch	Inactive
5470	Puohokamoa Stream	1,250	Downstream from Wailoa (Koolau) Ditch	Inactive

[Gaging-station number is preceded by 16 and ends in 00]

Table 3-3. Information from selected USGS surface water gaging stations in the hydrologic unit of Puohokamoa (Source: Gingerich, 1999b).

[Mgal/d, million gallons per day; --, not determined; gaging-station number is preceded by 16 and ends in 00; na, not applicable]

Station number	Station location	Period of record	Years of complete record	Average annual streamflow (Mgal/d)	Lowest daily streamflow (Mgal/d)	Average annual base flow (Mgal/d)
5420	East Branch Puohokamoa	7	1919–27	1.24	0	1.41
			1932–33			
5430	Middle Branch Puohokamoa	14	1919–27	2.48	0.04	0.48
			1932–34			
			1962–69			
5440	West Branch Puohokamoa	10	1919–28	3.54	0.08	0.81
			1932–34			
5450	Puohokamoa Stream	58	1913–71	21.36	0.04	5.46

Flow in Puohokamoa Stream is captured by five surface water diversion systems. The west and east branch of Puohokamoa Stream is diverted by the Lower Kula Pipeline at 3,016 feet elevation. The middle branch is diverted by the Lower and Upper Kula Pipeline at 3,016 feet and 4,310 feet elevation, respectively. The main Puohokamoa Stream is diverted by three diversion systems, 1) Wailoa (Koolau) Ditch at 1,300 feet elevation; 2) Spreckels Ditch at 1,290 feet elevation; and 3) Manuel Luis Ditch at 900 feet elevation (Gingerich, 1999b). The following is a summary of the flow conditions on Puohokamoa Stream, categorized by the approximate location of the stream reaches (i.e., upper, middle, and lower). Based on the available streamflow data, Puohokamoa Stream appears to be mostly a gaining stream, excepting some losing and dry sections in the headwater tributaries.

**Puohokamoa Stream, upper reach.** According to Gingerich (1999b), Puohokamoa Stream and its three headwater branches are mostly gaining streams. Median flows ( $TFQ_{50}$ ) at stations 16542000, 16543000, 16544000, and 16545000 are 0.77, 1.3, and 1.7 cubic feet per second, respectively (Tables 3-3 to 3-6). The west branch of Puohokamoa Stream is gaining ground water flow from the headwaters to its confluence with the main stream at 2,100 feet elevation. Streamflow measurements made on October 30, 1932 during low-flow conditions show that the west branch gained 0.04 million gallons of flow per day between the 2,800 feet (at station 16544000) and 2,440 feet altitude (Gingerich, 1999b). Upstream of station 16543000, the middle branch is gaining flow but downstream from the station, the stream is losing (Gingerich, 2005). Streamflow measurements made on April 10, 1962 indicate a gain of 0.18 million gallons of flow per day between the 3,200 feet and 2,900 feet (at station 16543000) altitudes. A different set of measurements made on June 12, 1933 show a loss of 0.05 million gallons of flow per day between the 2,900 feet (at station 16543000) and 2,400 feet altitudes. The east branch is dry upstream from station 16542000, and gaining flow below the station (Gingerich, 2005). Streamflow measurements made on 0.05 million gallons of flow per day between the 2,900 feet (at station 16543000) and 2,400 feet altitudes. The east branch is dry upstream from station 16542000, and gaining flow below the station (Gingerich, 2005). Streamflow measurements made on 0.05 million gallons of flow per day between the 2,800 feet (at station 16543000) and 2,400 feet altitudes. The east branch is dry upstream from station 16542000, and gaining flow below the station (Gingerich, 2005). Streamflow measurements made on 0.11 million gallons of flow per day between the 2,800 feet (at station 16542000) and 2,460 feet altitude (Gingerich, 1999b).

*Puohokamoa Stream, middle reach.* Puohokamoa Stream below the confluence is mostly a gaining stream. Median flow at station 16545000 is 13 cubic feet per second (Table 3-7). Measurements made in 1920 indicate flow gains of about 1.20 million gallons per day between the 2,440 feet and 1,322 feet (at station 16545000) altitudes. Base flow estimates from long-term streamflow records show that upstream from station 16545000 at 1,322 feet elevation, the average annual gains from ground water are about 5.46 million gallons per day. From this ground water gain, 2.8 million gallons of flow per day is gained downstream of the gaging stations on the three branches of Puohokamoa Stream (around the 2,800 feet altitude).

*Puohokamoa Stream, lower reach.* Downstream from the Wailoa (Koolau) Ditch, Puohokamoa Stream is gaining ground water flow. A measurement made in March 1928 shows a gain of about 0.1 million gallons per day between the 900 feet and 500 feet altitudes (Gingerich, 1999b).

Table 3-4. General information and flow-duration characteristics of USGS stream gaging station on the east bran	ch of
Puohokamoa Stream. Maui (station 16542000).	

Fuoriokaritoa Streatti, Maur (Sta		2000).										
Station number:	165	542000										
Station name:	ΕE	B PUOH	OKAM	OA STR	AT HA	AIKU-U	KA BDF	RY NR I	KAILIII	J		
Flow diverted or regulated?:	Ν				Altitud	de (feet):			2,800			
Latitude (decimal degrees):	20.	823184	19		Altitud	de accura	acy (feet):		not av	ailable		
Longitude (decimal degrees):	-15	6.20830	0187		Basin	area (sq	uare mile	es):	0.14			
Latitude/Longitude accuracy:	unk	nown			Perio	d of reco	rd:		1920-	1927,19	31-1933	j
Horizontal datum:	nac	183			Comp	olete wate	er years:		1921-	1926,19	32	
Minimum daily mean discharge	during pe	eriod of r	record:		Maxi	mum dai	ly mean	dischar	ge during	period	of record	d:
Discharge, cubic feet per se	econd:	0				Discharg	e, cubic f	feet per s	second:		40	
Number of occurrences:		14				Number	of occurr	ences:			1	
Most recent occurrence:		06/	/07/1925	5		Most rec	ent occur	rence:			11/21/19	24
Flow-duration cha	racteristic	s based	on com	plete wa	ter years	s during	period of	f record	(7 comp	lete year	rs)	
Percentage of time discharge	Mean	50	55	60	65	70	75	80	85	90	95	99
equaled or exceeded												
Discharge, in	1.9	0.77	0.77	0.62	0.62	0.62	0.46	0.46	0.46	0.31	0.31	0.12
cubic feet per second												

Table 3-5. General information and flow-duration characteristics of USGS stream gaging station on the middle branch of	
Puohokamoa Stream, Maui (station 16543000).	

uonokamba Stream, Maul (St		1											
Station number:	165	43000											
Station name:	MB	B PUOE	IOKAN	IOA STI	R AT H	AIKU-U	KA BD	RY NR	KAILII	LI			
Flow diverted or regulated?:	Y	Y			Altitud	de (feet):			2,900				
Latitude (decimal degrees):	20.8	3245729	99		Altitud	de accura	acy (feet)		not av	ailable			
Longitude (decimal degrees):	-150	5.21135	725			area (sq			0.48				
Latitude/Longitude accuracy:	unk	unknown				d of recoi		,	1919-	1927.19	32-1934		
5 ,									1962-	1969		·	
Horizontal datum:	nad	83			Comp	olete wate	er years:		1920-	1926,19	33,1963	-1968	
Minimum daily mean discharge	e during pe	riod of r	ecord:		Maxi	mum dai	ly mean	discharg	ge during	g period	of record	d:	
Discharge, cubic feet per s		0.0			Discharge, cubic feet per see					second: 186			
Number of occurrences:		6				Number	of occurr	1					
Most recent occurrence:		11/	20/1962	2		Most rec	ent occui	rence:		(	04/25/19	34	
Flow-duration cha	racteristics	based	on com	olete wat	er years	during p	period of	record (	14 comp	olete yea	rs)		
Percentage of time discharge	Mean	50	55	60	65	70	75	80	85	90	95	99	
equaled or exceeded													
Discharge, in	3.8	1.3	1.1	0.93	0.91	0.76	0.62	0.46	0.46	0.31	0.19	0.09	
cubic feet per second													

 Table 3-6.
 General information and flow-duration characteristics of USGS stream gaging station on the west branch of Puohokamoa Stream, Maui (station 16544000).

	,										
165	44000										
WI	B PUOE	IOKAM	IOA STI	R AT HA	AIKU-U	JKA BD	RY NR	KAILII	LI		
Y				Altituc	de (feet):			2,800			
20.8	8287393	2		Altituc	de accura	acy (feet)	:	not av	ailable		
-15	6.21385	704		Basin	area (so	uare mile	es):	0.45			
unk	nown			Perio	d of reco	rd:		1919-	1928,19	32-1935	
nad	83			Comp	olete wate	er years:		1920-	1927,19	33-1934	
	riod of r	ecord:							j period	of record	1:
cond:	0.0	8			Discharg	je, cubic	feet per s	econd:		155	
	10				Number	of occurr	ences:		1	1	
	06/	30/1921			Most rec	ent occu	rrence:		(	04/25/19	34
acteristics	s based (	on comp	lete wate	er years	during p	period of	record (	(10 comp	lete yea	rs)	
Mean	50	55	60	65	70	75	80	85	90	95	99
5.5	1.7	1.5	1.2	1.2	1.0	0.93	0.77	0.62	0.62	0.46	0.15
	W I Y 20.8 -15 unk nad during pe cond: <u>acteristics</u> Mean	Y 20.8287393 -156.21385 unknown nad83 during period of ro cond: 0.0 10 06/ acteristics based of Mean 50	W B PUOHOKAM Y 20.82873932 -156.21385704 unknown nad83 during period of record: cond: 0.08 10 06/30/1921 acteristics based on comp Mean 50 55	W B PUOHOKAMOA STI Y 20.82873932 -156.21385704 unknown nad83 during period of record: cond: 0.08 10 06/30/1921 acteristics based on complete wate Mean 50 55 60	W B PUOHOKAMOA STR AT H. Y       Altitut         20.82873932       Altitut         -156.21385704       Basin         unknown       Perior         nad83       Comp         during period of record:       Maxin         cond:       0.08         10       06/30/1921         acteristics based on complete water years         Mean       50       55       60       65	W B PUOHOKAMOA STR AT HAIKU-UY         Y       Altitude (feet):         20.82873932       Altitude accura         -156.21385704       Basin area (so         unknown       Period of record         nad83       Complete wate         during period of record:       Maximum dai         cond:       0.08       Discharg         10       Number         06/30/1921       Most record         Mean       50       55       60       65       70	W B PUOHOKAMOA STR AT HAIKU-UKA BD Y       Altitude (feet):         20.82873932       Altitude accuracy (feet)         -156.21385704       Basin area (square mile unknown         nad83       Complete water years:         during period of record:       0.08         10       Discharge, cubic         06/30/1921       Most recent occur         acteristics based on complete water years during period of Mean       55	W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR         Y       Altitude (feet):         20.82873932       Altitude accuracy (feet):         -156.21385704       Basin area (square miles):         unknown       Period of record:         nad83       Complete water years:         during period of record:       0.08         10       Discharge, cubic feet per st         06/30/1921       Most recent occurrence:         acteristics based on complete water years during period of record (Mean       55	W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILII         Y       Altitude (feet):       2,800         20.82873932       Altitude accuracy (feet):       not av         -156.21385704       Basin area (square miles):       0.45         unknown       Period of record:       1919-         nad83       Complete water years:       1920-         during period of record:       0.08       Discharge, cubic feet per second:         10       Number of occurrences:       06/30/1921         acteristics based on complete water years during period of record (10 complete water years during period	W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI         Y       Altitude (feet):       2,800         20.82873932       Altitude accuracy (feet):       not available         -156.21385704       Basin area (square miles):       0.45         unknown       Period of record:       1919-1928,19         nad83       Complete water years:       1920-1927,19         during period of record:       0.08       Discharge, cubic feet per second:         10       Number of occurrences:       06/30/1921         Mean       50       55       60       65       70       75       80       85       90	W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI         Y       Altitude (feet):       2,800         20.82873932       Altitude accuracy (feet):       not available         -156.21385704       Basin area (square miles):       0.45         unknown       Period of record:       1919-1928,1932-1935         nad83       Complete water years:       1920-1927,1933-1934         during period of record:       0.08       Discharge, cubic feet per second:       155         10       Number of occurrences:       1       04/25/19         acteristics based on complete water years during period of record (10 complete years)       Masing period of record (10 complete years)         Mean       50       55       60       65       70       75       80       85       90       95

	,											
Station number:		45000										
Station name:	PU	OHOK/	AMOA S	STR AB	SPREC	KELS I	DITCH 1	VR HUI	ELO, MA	AUI		
Flow diverted or regulated?:	Y	Y			Altitud	Altitude (feet):				.04		
Latitude (decimal degrees):	20.8	20.85262534			Altitud	de accura	acy (feet)		Not av	vailable		
Longitude (decimal degrees):	-15	-156.18857979			Basin	area (so	uare mile	es):	2.35			
Latitude/Longitude accuracy:	unk	nown			Perio	d of reco	rd:	,	1913-	1972		
Horizontal datum:	nad	83			Comp	olete wate	er years:		1914-	1971		
Minimum daily mean discharge	e during pe	riod of r	ecord:		Maxii	num dai	ly mean	dischar	ge during	period	of record	:
Discharge, cubic feet per se		0.6				Discharg	e, cubic	feet per s	second:	· · ·	984	
Number of occurrences:		1				Number	of occurr	ences:			1	
Most recent occurrence:		10/	26/1917	,		Most rec	ent occu	rence:			11/29/19	68
Flow-duration cha	racteristics	s based	on comp	lete wat	er years	during p	period of	record	(58 comp	olete yea	rs)	
Percentage of time discharge	Mean	50	55	60	65	70	75	80	85	90	95	- 99
equaled or exceeded												
Discharge, in	33	13	11	9.9	8.7	7.5	6.5	5.6	4.6	3.7	2.8	1.5
cubic feet per second												

Table 3-7. General information and flow-duration characteristics of USGS stream gaging station on Puohokamoa Sream above Spreckels Ditch, Maui (station 16545000).

In cooperation with the Commission on Water Resource Management, the USGS conducted a study (Gingerich, 2005) to assist in determining reasonable and beneficial noninstream and instream uses of surface water in northeast Maui. The purpose of the study was to develop methods of estimating natural (undiverted) median streamflow, total flow statistics (TFQ), and base flow statistics (BFQ) at ungaged sites where observed data are unavailable. The study area lies between the drainage basins of Kolea Stream to the west and Makapipi Stream to the east. Basin characteristics and hydrologic data for the study area were collected and analyzed. One of the products of the study is a set of regression equations that can be used to estimate natural (undiverted) TFQ<sub>50</sub>, BFQ<sub>50</sub>, TFQ<sub>95</sub>, and BFQ<sub>95</sub> at gaged and ungaged sites. The subscripts indicate the percentage of time the flow, either total or base flow, is equaled or exceeded.

Streamflow statistics at continuous-record gaging stations were estimated using the regression equations, and then compared to the measured flow to assess the accuracy of the regression method by computing the relative error. Relative error is the percent difference between the measured flow and the estimated statistic. The flow statistics and associated statistical comparisons are presented in Table 3-9. Note that the measured flows are different from the TFQ<sub>50</sub> values in Tables 3-4 through 3-7 for the corresponding stations. That is because the measured flows in the study were adjusted to a common base period for comparison so that the differences in flow among stations reflect spatial differences in climate and basin characteristics as well as temporal differences in rainfall (Gingerich, 2005). The adjusted flows are listed in Table 3-8.

Table 3-8. Selected estimated median and low-flow characteristics for continuous-record sites in Puohokamoa, Maui, Hawaii (Gingerich, 2005, Table 2).

[Qxx is the xx-percent flow duration of streamflow; ft<sup>3</sup>/s, cubic feet per second; base period is 1914-17, 1921-2001; gaging-station number is preceded by 16 and ends in 00; active stations are shown in *bold italics*; +, combined with record from indicated station; index station is station 5180; --, no adjustment; NA, not applicable]

	Length of TFQ <sub>5</sub>		250	BFG	250	TFC	295	BFQ <sub>95</sub>		
Gaging- station number	concurrent record (years)	during concurrent period (ft3/s)	adjusted to index station (ft3/s)							
5420	8	0.93	0.88	0.58	0.53	0.31	0.29	0.19	0.27	
5430	15	1.3	1.4	0.62	0.67	0.18	0.21	0.12	0.15	
5440	9	1.9	1.9	1.1	1	0.46	0.55	0.37	0.44	
5450	53	13	12	6.8	6.4	2.8	2.5	2.2	2.1	

The regression equations performed better in predicting the higher flow statistics (TFQ<sub>50</sub> and BFQ<sub>50</sub>) than the lower flow statistics (TFQ<sub>95</sub> and BFQ<sub>95</sub>) for all gaging stations, excepting station 16542000. The relative errors for station 16542000 are not necessarily meaningful because the stream may be gaining or losing, and it may go dry during low-flow conditions. For other stations, relative errors between the measured and estimated TFQ<sub>50</sub> and BFQ<sub>50</sub> are under 25 percent. The measured TFQ<sub>50</sub> and BFQ<sub>50</sub> for station 16543000 fall within the 90 percent confidence interval of the corresponding estimated statistics.

When comparing lower flow statistics, one must be cautious in using the relative error value to compare the difference between the measured and estimated statistics because the flow values are small. From a mathematical standpoint, a small difference between two decimal numbers can project to a large relative difference. For example, the difference between a flow of 0.01 million gallons per day and 0.02 million gallons per day is insignificant compared to the difference between a flow of 2 million gallons per day and 4 million gallons per day. However, both exhibit a 50 percent relative difference. The relative error between the measured and estimated BFQ<sub>95</sub> for station 16543000 is 60 percent; however, the measured flow is within the 90 percent confidence interval of the estimated statistic. In other words, the regression equations are relatively accurate in predicting the BFQ<sub>95</sub> for that station even though the error is large.

Table 3-9. Stream flow statistics estimated using regression equations, lower and upper confidence intervals, standard errors, measured flows, and relative errors for continuous-record sites in Puohokamoa (Gingerich, 2005, Table 9).

[Flows are in cubic feet per second (cfs); 90% LCL and 90% UCL is 90 percent lower and upper confidence level; Standard error is in percent; Relative error is the percent difference between the measured statistic and the estimated statistic; Measured flows in *bold italic* fall within the lower and upper 90 percent confidence interval!

Gaging Station	Statistic	TFQ <sub>50</sub>	BFQ <sub>50</sub>	TFQ <sub>95</sub>	BFQ <sub>95</sub>
16542000	Estimated flow	0.3	0.14	0.15	0.1
	90% LCL	0.2	0.08	0.08	0.05
	90% UCL	0.45	0.25	0.27	0.2
	Standard error	22.5	33.5	34.9	39.4
	Measured flow	0.88	0.53	0.29	0.27
	Relative error	-66	-74	-48	-63
16543000	Estimated flow	1.6	0.78	0.33	0.24
	90% LCL	1.4	0.61	0.22	0.15
	90% UCL	1.9	1	0.5	0.37
	Standard error	9.4	13.8	22.9	25.7
	Measured flow	1.4	0.67	0.21	0.15
	Relative error	14	16	57	60
16544000	Estimated flow	1.5	0.78	0.46	0.35
	90% LCL	1.3	0.62	0.33	0.24
	90% UCL	1.8	0.99	0.63	0.5
	Standard error	9.1	13.4	18.4	20.7
	Measured flow	1.9	1	0.55	0.44
	Relative error	-21	-22	-16	-20
16545000	Estimated flow	12	7.9	3.6	3.3
	90% LCL	11	6.5	2.6	2.3
	90% UCL	14	9.6	5	4.6
	Standard error	7.5	11	18.1	20.3
	Measured flow	12	6.4	2.5	2.1
	Relative error	0	23	44	57

The regression equations were also applied to three selected ungaged sites, 1) site PL near the mouth of Puohokamoa Stream; 2) site PML at the lower middle reach of Puohokamoa Stream; and 3) site PMU at the upper middle reach of Puohokamoa Stream upstream from the Manuel Luis Ditch (Figure 3-3). Low-flow measurements were made in 1928 at the ungaged sites and compared to the estimated flows. Results are presented in Table 3-10. The regression equations performed slightly better in predicting the higher flow statistics than the lower flow statistics for all three ungaged sites. Measured flows are estimated from flow statistics at station 16545000 and flow measurements made in 1928, without the effects of natural flow addition because the stream may be gaining or losing. As a result, relative error values are general representations of the differences between the measured and estimated statistics and should not be used to assess the accuracy of the regression equation in predicting the measured flow.

Table 3-10. Stream flow statistics estimated using regression equations, lower and upper confidence intervals, standard errors, measured flow, and relative errors for ungaged site in Puohokamoa (Gingerich, 2005, Table 10).

Stream location	Statistic	TFQ <sub>50</sub>	BFQ <sub>50</sub>	TFQ95	BFQ95	Source of measured flow estimates
Puohokamoa lower	Estimated flow	18	12	5	4.7	Flow statistics from 5450
(PL)	90% LCL	15	9.6	3.4	3	upstream plus EMI 1928
	90% UCL	22	16	7.5	7.3	measurement; effects of natural flow addition are unknown
	Standard error	10.1	14.9	22.7	25.4	because stream may be gaining or
	Measured flow	> 12	> 6.6	> 2.7	> 2.3	losing
	Relative error	< 50	< 82	< 85	< 100	
Puohokamoa middle	Estimated flow	17	11	4.8	4.4	Flow statistics from 5450
lower (PML)	90% LCL	14	9	3.3	2.9	upstream plus EMI 1928
	90% UCL	20	15	7	6.8	measurement; effects of natural flow addition are unknown
	Standard error	9.6	14.1	22	24.7	because stream may be gaining or
	Measured flow	> 12	> 6.6	2.7	> 2.3	losing
	Relative error	< 42	< 67	78	< 91	
Puohokamoa middle	Estimated flow	15	9.9	4.3	3.9	Flow statistics from 5450
upper (PMU)	90% LCL	13	7.9	3	2.6	upstream plus EMI 1928
	90% UCL	17	12.4	6.1	5.8	measurement; effects of natural flow addition are unknown
	Standard error	8.7	12.8	20.3	22.8	because stream may be gaining of
	Measured flow	> 11	> 6.4	> 2.5	> 2.1	losing
	Relative error	< 25	< 55	< 72	< 86	

[Flows are in cubic feet per second (cfs); 90% LCL and 90% UCL is 90 percent lower and upper confidence level; Standard error is in percent; Relative error is the percent difference between the measured statistic and the estimated statistic; Measured flows in *bold italic* fall within the lower and upper 90 percent confidence interval]

A summary of the natural (undiverted) streamflow statistics is presented in Table 3-11. The estimated statistics at the three ungaged sites are a combination of low-flow measurements and regression estimates. The flow statistics for Puohokamoa Stream are consistent with the nature of a gaining stream. According to the statistics, Puohokamoa Stream could possibly gain five cubic feet of total flow per second, with one cubic feet of flow per second from ground water sources, between station 16545000 upstream of Wailoa (Koolau) Ditch and the ungaged site PL near the stream mouth.

Table 3-11. Estimates of natural (undiverted) streamflow statistics for gaged and ungaged sites in Puohokamoa (Source: Gingerich, 2005, Table 11).

[TFQxx is the xx percent flow duration of total streamflow; BFQxx is the xx percent flow duration of base flow; all flows are in cubic feet per second; numbers in *bold italic* are considered maximums at sites downstream of unquantified but known losing reaches; g.s., gaging station; adj., adjustment]

Stream location	TFQ <sub>50</sub>	BFQ <sub>50</sub>	TFQ <sub>95</sub>	BFQ <sub>95</sub>	Source of estimate
lower (PL)	17	11	3.6	3.1	Middle-lower site estimate plus equation adj.; TFQ95, BFQ95: Middle-lower site estimate plus low-flow measurement
middle lower (PML)	16	10	3.6	3.1	Middle-upper site estimate plus equation adj.; TFQ95, BFQ95: Middle-upper site estimate plus low-flow measurement
middle upper (PMU)	14	8.4	3.1	2.7	Upper site estimate plus equation adj.
upper (5450)	12	6.4	2.5	2.1	Continuous record gaging station

Results of the study show that the streams in the eastern side of the study area (i.e., east of Keanae Valley) have the lowest reductions in streamflow due to diversions at the 1,300 feet elevation. Therefore, the stream reaches immediately downstream from the diversions are dry most of the time. Effects of diversions can be assessed by comparing the flow statistics under natural conditions (Table 3-11) with those under diverted conditions (Table 3-12). Diversion at the Wailoa (Koolau) Ditch could potentially reduce flow at the ungaged site PMU by over 75 percent. At ungaged sites PML and PL, the Manuel Luis Ditch could potential reduce total flow by over 80 percent, and low flows by 89 percent. During low-flow conditions, the stream could be dry in the lower reaches of Puohokamoa Stream.

Table 3-12. Estimates of diverted stream flow statistics and percent flow reduction for gaged and ungaged sites in Puohokamoa (Source: Gingerich, 2005, Table 12).

Stream	TF	Q <sub>50</sub>	BF	Q <sub>50</sub>	TF	Q <sub>95</sub>	BF	Q <sub>95</sub>	
location	Estimate	Percent reduction	Comments						
lower (PL)	3	82	2.1	81	0.4	89	0.4	87	Diverted at Manuel Luis Ditch
middle lower (PML)	2	87	1.1	89	0.4	88	0.4	87	Diverted at Spreckels Ditch
middle upper (PMU)	3	79	2	76	0.7	77	0.6	78	Diverted at Wailoa Ditch
upper (5450)	12	0	6.4	0	2.5	0	2.1	0	Minor upstream diversion

[TFQxx is the xx percent flow duration of total streamflow; BFQxx is the xx percent flow duration of base flow; percent reduction is relative to undiverted flow at the same location; all flows are in cubic feet per second; numbers in *bold italic* are considered maximums at sites downstream of unquantified but known losing reaches]

Mathematical models and equations are commonly used to represent hydrologic occurrences in the real world; however, they are typically based on a set of assumptions that oftentimes render their estimates questionable in terms of accuracy and precision. This does not mean the public should entirely discount the estimates produced by these mathematical tools because they do provide quantitative and qualitative relative comparisons that are useful when making management decisions. Objections have been raised by several agencies in regards to the use of regression equations to estimate flow statistics. While the estimated statistics are presented to fulfill the purpose of compiling the best available information that will be considered in determining the interim IFS recommendations, the Commission staff does not intend


to rely exclusively on the regression equations to make such important management decisions. The limitations and potential errors of the regression equations must also be considered.

One of the limitations of the regression equations is that they do not account for variable subsurface geology, such as those of intermittent streams and where springs discharge high flow to streams. The equations may overestimate flow statistics in intermittent streams as they do not account for losing reaches. On the other hand, the equations may underestimate the additional streamflow gained from springs. Furthermore, the equations may produce poor results when applied to sites that have basin characteristics outside the range of values used to develop the equations. The regression equations tend to predict more accurately the higher flow statistics, TFQ<sub>50</sub> and BFQ<sub>50</sub>, rather than the lower flow statistics, TFQ<sub>95</sub> and BFQ<sub>95</sub>. According to Gingerich (2005), the most reliable estimates of natural and diverted streamflow duration statistics at gaged and ungaged sites in the study area were made using a combination of continuous-record gaging station data, low-flow measurements, and values determined from the regression equations. The study found that the average reduction in the low flow of streams due to diversions ranges from 77 to 89 percent.

## 3.4 Long-Term Trends in Streamflow

In a different study, the USGS examined the long-term trends and variations in streamflow on the islands of Hawaii, Maui, Molokai, Oahu, and Kauai, where long-term stream gaging stations exist (Oki, 2004). The study analyzed both total flow and estimated base flow at 16 long-term gaging stations. For the 90-year period 1913-2002, monthly mean base flows generally followed an increasing trend above the long-term average from 1913 to early 1940s, and a decreasing trend after the early 1940s to 2002 (Figure 3-4). Monthly mean total flows follow a similar pattern with the exception that the monthly mean total flow increased from mid-1980s to mid-1990s, and decreased from mid-1990s to 2002. Downward trends in the annual total low flow percentiles, TFQ<sub>75</sub> and TFQ<sub>90</sub>, were statistically significant at the 5 percent level of significance. This is consistent with the annual base flow percentiles (Oki, 2004). In summary, the available long-term streamflow data suggest that streamflow is generally decreasing.

Figure 3-2. Aquifer system area and well locations in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2006b; State of Hawaii, Commission on Water Resource Management, 2008d; USGS 2001b).

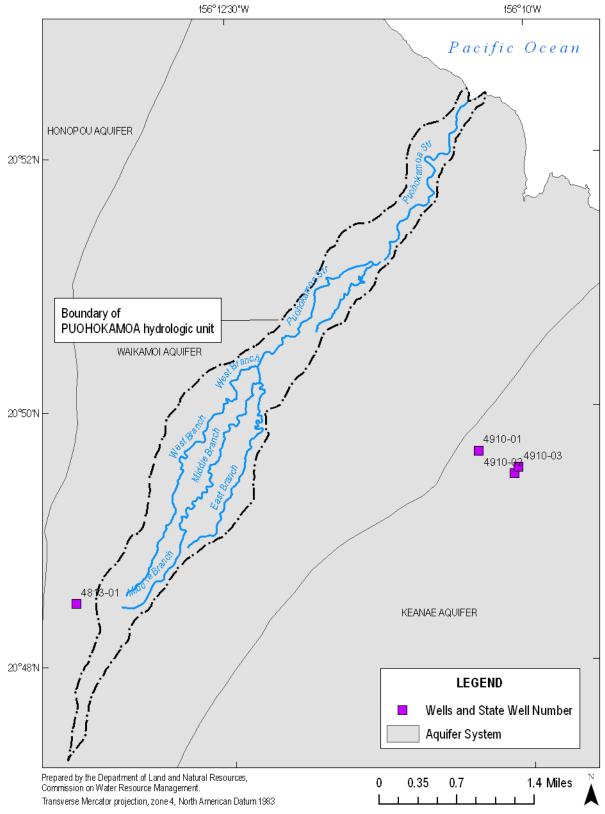

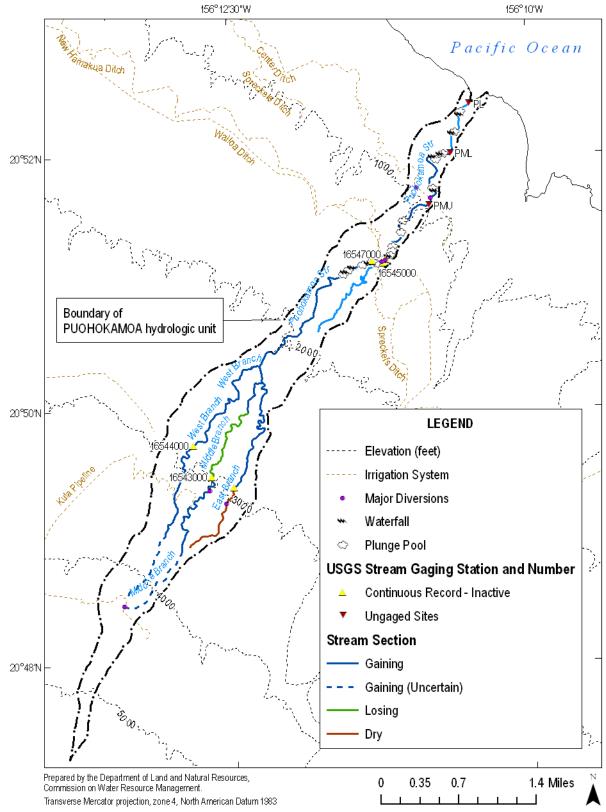


Figure 3-3. Location of diversions, irrigation systems, USGS gaging stations, and selected ungaged sites in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, n.d.; 1996, 2004c; 2005; USGS 2001b).

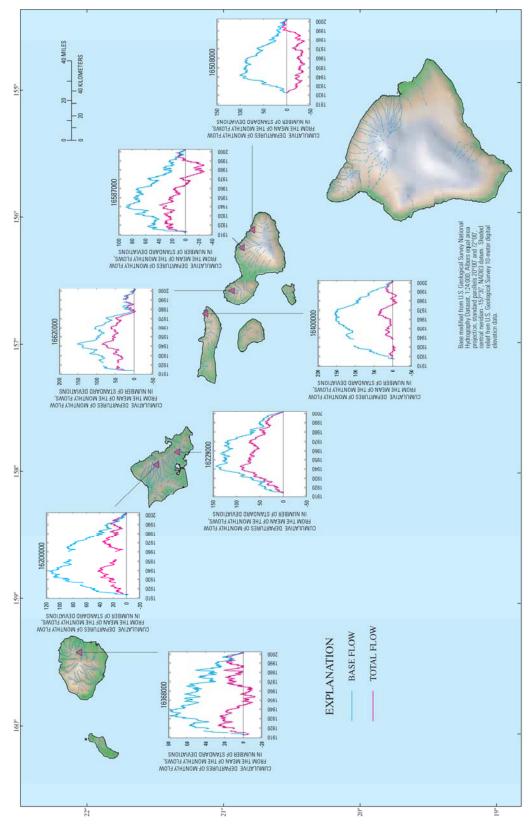


Figure 3-4. Cumulative departures of monthly mean flow from the mean of the monthly flows, Hawaii. This data is based on complete water years from 1913 through 2002. (Oki, 2004, Figure 4).

## 4.0 Maintenance of Fish and Wildlife Habitat

When people in Hawaii consider the protection of streamflows for maintaining fish habitat, their thoughts generally focus on a handful of native species, including five native fishes (four gobies and one eleotrid), two snails, one shrimp, and a prawn (Table 4-1). Four of the fish species - *Stenogobius hawaiiensis* (Goby), *Sicyopterus stimpsoni* (Goby), *Eleotris sandwicensis* (Eleotrid), and *Lentipes concolor* (Goby) - are endemic (found only in Hawaii), and the *Awaous guamensis* is an indigenous (native to Hawaii and elsewhere) goby. Only the *Lentipes concolor* was considered a "category 1 candidate for listing in the National Register for Endangered Species…but has since been reclassified as a Species of Concern" (as cited in Gingerich and Wolff, 2005). The crustaceans (*Macrobrachium grandimanus* (prawn) and *Atyoida bisulcata* (shrimp)), and mollusks (*Neritina vespertina* and *Neritina granosa* (snail)) are both endemic to Hawaii.

Hawaii's native stream animals have amphidromous life cycles (Ego, 1956), meaning that they spend their larval stages in the ocean (salt water), then return to fresh water streams to spend their adult stage and reproduce. Newly hatched fish larvae are carried downstream to the ocean where they become part of the planktonic pool in the open ocean. The larvae remain at sea from a few weeks to a few months, eventually migrating back into a fresh water stream as juvenile *hinana*, or postlarvae (Radtke et al., 1988). Once back in the stream, the distribution of the five native fish species are largely dictated by their climbing ability (Nishimoto and Kuamoo, 1991) along the stream's longitudinal gradient. This ability to climb is made possible by a fused pelvic fin which forms a suction disk. *Eleotris sandwicensis* lacks fused pelvic fins and is mostly found in the lower stream reaches. *Stenogobius hawaiiensis* is also found in the lower reaches because while it has fused pelvic fins, it lacks the musculature necessary for climbing (Nishimoto and Kuamoo, 1997). *Awaous guamensis* and *Sicyopterus stimpsoni* are able to ascend moderately high waterfalls less than 20 meters in height, while *Lentipes concolor* has the greatest climbing ability and has been observed at elevations higher than 3,000 feet (Fitzsimons and Nishimoto, 1990) and above waterfalls more than 900 feet in vertical height (Englund and Filbert, 1997). Figure 4-1 illustrates the elevational profile of these native fresh water fishes.

Scientific Name	Hawaiian Name	Туре	Biogeographic		Distribution			
			status	Lower	Middle	Upper		
Stenogobius hawaiiensis	'O'opu naniha	Goby	Endemic	•				
Awaous guamensis	'O'opu nakea	Goby	Indigenous	•	•			
Sicyopterus stimpsoni	'O'opu nopili	Goby	Endemic	•	•			
Eleotris sandwicensis	'O'opu akupa (okuhe)	Eleotrid	Endemic	•	•			
Lentipes concolor	'O'opu hi'ukole (alamo'o)	Goby	Endemic	•	•	•		
Macrobrachium grandimanus	'Opae 'oeha'a	Prawn	Endemic	•				
Atyoida bisulcata	'Opae kala'ole	Shrimp	Endemic	•	•	•		
Neritina vespertina	Hapawai	Snail	Endemic	•				
Neritina granosa	Hihiwai	Snail	Endemic	•	•			

Table 4-1. List of commonly mentioned native stream organisms and their generalized distribution within natural undiverted streams. (Source: State of Hawaii, Division of Aquatic Resources, 1993; Ford et al., 2009).

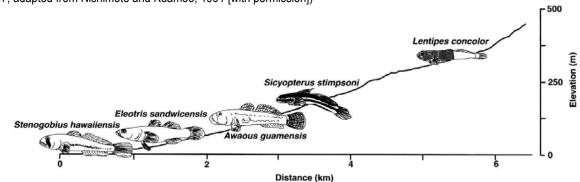


Figure 4-1. Elevational profile of a terminal-estuary stream on the Big Island of Hawaii (Hakalau Stream). (Source: McRae, 2007, adapted from Nishimoto and Kuamoo, 1991 [with permission])

Amphidromy has many advantages, the most important being "the potential for repopulating a stream with a full compliment of its formerly predominant vertebrate and invertebrate species" (as cited in Ford et al., 2009). Streams in Hawaii experience many natural disturbances in the stream ecosystem, including floods, landslides, hurricanes, and drought. Post-larvae oceanic recruitment (amphidromy) "allows rapid recolonization of streams after catastrophic events...and prevents genetic isolation of populations". In addition, the periodic drying of lower stream reaches and the flashy nature of Hawaii's streams with the sudden peak flows that allow for flushing of debris from the streambed, encourage "migration and spawning by aquatic organisms." There has also been evidence that the timing of reproduction and recruitment is strongly influcened by freshets and periods of heavy rain.

Damselflies also depend on healthy freshwater ecosystems for their survival. Most of the damselflies native to Hawaii are aquatic as immatures, and return to the water only to mate (Polhemus and Asquith, 1996). Of the native Hawaiian damselflies, the *Megalagrion* species is endemic and found only in Hawaii. In July of 2009, the U.S. Fish and Wildlife Service proposed two of the *Megalagrion* damselflies, the flying earwig Hawaiian damselfly (*Megalagrion nesiotes*) and the Pacific Hawaiian damselfly (*Megalagrion pacificum*), to be listed as endangered species (Foote, 2009, July 8). Both damselflies species have been candidates for protection since the 1990s. Currently, the flying earwig Hawaiian damselfly can only be found in Maui, and the Pacific Hawaiian damselfly in the islands of Molokai, Oahu, and Maui (Foote, 2009, July 8).

## 4.1 Impacts on Native Species Distribution

Gingerich and Wolff (2005) discussed "bottlenecks" as dry reaches in the stream that prevent upstream migration of native species. While surface water diversions are not considered as "bottlenecks", the dry reaches that are often found immediately downstream from the diversions can function as "bottlenecks" that inhibit species migration. With a few exceptions, the diversions capture almost all base flow and an unknown amount of total streamflow in each stream, decreasing flow downstream of the diversion and sometimes causing streams to go dry. This prevents the upstream migration of native stream animals, restricts surviving adult animals to the disconnected deep pools, and causes postlarvae recruits to be stranded at the stream mouth. Changes in flow volume may influence the physical and chemical characteristics of stream water and flow (e.g. temperature, pH, velocity), hence altering the stream ecosystem. While Ford et al. (2009) suggested that the presence of amphidromous species upstream of diversions is an indication of restored continuity in streamflow from periodic freshets, continued dewaterment of streams by diversions, especially during low flow conditions, could possibly result in longer stream reaches with prolonged dry periods, limiting overall habitat for native species.

Large waterfalls are obvious "bottlenecks" in the stream ecosystem that restrict the upstream migration of most native aquatic species, except the alamoo and opae. These species have fused pelvic fins and the

musculature for climbing high vertical walls and inhabiting the upper stream reaches. Therefore, streams with terminal waterfalls may habor a lower diversity of native aquatic species than those without. On the other hand, terminal estuaries and pools downstream of waterfalls are known to carry a diversity of native species and are ideal spots for traditional gathering.

Irrigation ditches serve as lateral conduits between watersheds, which may contribute to the spread of both native and alien species. The Commission does not condone the release of ditch flows as the correct means of flow restoration, but rather have streamflow bypass the diversion structure and continue to flow downstream. However, streams may be used to convey diverted flow from one ditch to another, introducing alien species from one stream to another. Furthermore, overflow in the ditch could also introduce invasive species into the stream. The potential for introducing species from invasive-dominated terminal reaches to native-dominated mid- and headwater reaches is not a major problem in east Maui due to the presence of large waterfalls. Ford et. al. (2009) discussed how ditches may also be "sinks" where "larvae cannot reach the sea and/or where recruits may not survive to reproduce." This is especially the case when native amphidromous species inhabit waters upstream of the ditches. The location and types of diversion structure also affect the ability of amphidromous species to migrate upstream.

Diversions have significantly reduced baseflows in the stream, limiting overall habitat for native species. While restoration of streamflow and increased connectivity could lead to the development of a richer and more native-dominated community in the stream, many other factors must also be considered in balancing the benefits of flow restoration to overall stream life versus providing water for agricultural and domestic uses. In addition to dewaterment, predation by native and non-native animals is also an important negative impact on the distribution on the native aquatic species. Some of the potentially harmful non-native species in east Maui include guppies, mosquitofish, swardtails, carp, oriental weatherfish (dojo), goldfish, Louisiana crayfish, apply snails (harmful to taro), and Asian clam (Ford et. al., 2009). In addition, the "aholehole are known to attack nests of goby eggs and may also consume returning post-larval gobies" (as cited in Ford et. al., 2009). Irrigation ditches may contribute to the spread of alien species; on the other hand, they aid in dispersing the native aquatic species, strengthing the overall population and continued survival of the native freshwater species.

Another factor that affects the distribution of native species is the condition of the streambed. Stream channels are often overgrown with alien grasses and shrubs. Vegetation along the stream bank has exposed roots that take up large amounts of water when sufficient flow is in the stream. Thus, during a high flow event, streams that are normally dry become only partially wetted because invasive plants and water thirst roots eventually absorb much of the water. In addition, fallen trees and other debris are found to block sections of the stream, which may reduce streamflow and even divert flow away from the main stream channel in the long term. Without proper maintenance of the streambed, restored streamflow in the upper elevations may not reach the ocean. Plans to rebuld healthy streambeds should be considered to help maximize the flow in the stream.

As stated in Ford et. al. (2009), the "synergistic effects of human alterations have led to a decline in the populations of native freshwater species statewide." Steamflow has also decreased over the past decade (see Section 3.4) and this has resulted, as generally believed, in less native stream species. While traditional gathering continues in east Maui, area residents are limited to certain areas with adequate streamflow to gather these resources (multiple residents in east Maui, personal communication, October 2008). Streams in east Maui are recognized as important habitats for native Hawaiian stream animals (Gingerich and Wolff, 2005). The maintenance, or restoration, of stream habitat requires an understanding of and the relationships among the various components that impact fish and wildlife habitat, and ultimately, the overall viability of a desired set of species. These components include, but are not limited to, species distribution and diversity, species abundance, predation and competition among native species, similar impacts by alien species, obstacles to migration, water quality, and streamflow.

The Commission does not intend to delve into the biological complexities of Hawaiian streams, but rather to present basic evidence that conveys the general health of the subject stream.

#### 4.2 Brief Overview of Literature

The biological aspects of Hawaii's streams have an extensive history, and there is a wealth of knowledge that continues to grow and improve. Ford et al. (2009) provided a general summary of the existing literature on native stream ecology since 1960. The earlier studies focused on the life histories and population biology of native amphidromous species. During the period of 1970s to 1980s, "the *Awaous guamensis* and *Sicyopterus stimpsoni* were listed along with *Lentipes concolor* by both the American Fisheries Society and the IUCN Red List of Threatened and Endangered Species" based on limited distribution and data availability. In 1996, "the USFWS delisted *Lentipes concolor* as candidate endangered species in response to statewide stream surveys" that indicated healthy and stable populations of the species. More recent studies focused on biological organization at the community and ecosystem levels, reproductive ecology (as cited in Ford et al., 2009), and habitat availability (Gingerich and Wolff, 2005).

One of the earliest statewide stream assessments was undertaken by the Commission in cooperation with the National Park Service's Hawaii Cooperative Park Service Unit. The 1990 Hawaii Stream Assessment (HSA) brought together a wide range of stakeholders to research and evaluate numerous stream-related attributes (e.g., hydrology, diversions, gaging, channelizations, hydroelectric uses, special areas, etc.). The HSA specifically focused on the inventory and assessment of four resource categories: 1) aquatic; 2) riparian; 3) cultural; and 4) recreational. Though no fieldwork was conducted in its preparation, the HSA involved considerable research and analysis of existing studies and reports. The data were evaluated according to predefined criteria and each stream received one of five ranks (outstanding, substantial, moderate, limited, and unknown).

Due to the broad scope of the HSA's inventory and assessment, it continues to provide a valuable information base for the Commission's Stream Protection and Management Program and will continue to be referred to in various sections of this report. For Puohokamoa Stream, the aquatic resources were classified as "limited", meaning very little native species were present. No species from Native Species Group One and Introduced Species Groups were identified. The HSA classification was based on two surveys, with the last one conducted in 1963.

Table 4-2. Hawaii Stream Assessment categorization of a	aquatic resources in Puohokamoa Stream.
---	---

Category	Value	Rank
Native Species Group 1 (NG1) Four native freshwater species were classified as "indicator species" and comprised the Native Species Group One (NG1). The committee considered these species, 'o'opu alamo'o ( <i>Lentipes concolor</i> ), 'o 'opu nakea ( <i>Awaous stamineus</i> ), 'o'opu nopili ( <i>Sicyopterus</i> <i>stimpsoni</i> ), and hihiwai (Neritina granosa), as representatives of potentially high quality stream ecosystems.	0	Poor
Native Species Group 1 (NG2) The other seven native species considered more common comprised Native Species Group Two (NG2). These included two 'o'opu akupa ( <i>Eleotris sandwicensis</i> ), 'o'opu naniha ( <i>Stenogobius genivittatus</i> ), aholehole ( <i>Kuhlia sandvicensis</i> ), 'ama'ama ( <i>Mugil cephalus</i> ), 'o'pae kala'ole ( <i>Atyoida bisulcata</i> ), 'o'pae 'oeha'a ( <i>Macrobrachium grandimanus</i> ), and hapawai ( <i>Theodoxus vespertinus</i> ). Presence of these species was considered to be typical of a healthy native stream ecosystem.	1	Good
Introduced Species Group One (IG1) This group included noxious, non-native stream animals that may prey upon and/or out- compete with native species. <i>Macrobrachium lar</i> . (Tahitian prawn), was not included in this group even though it may pose a threat to native stream animals because it is believed to be present in almost all Hawaiian streams.	0	
Introduced Species Group Two (IG2) This consists of the non-native species considered to be innocuous to Hawaiian streams.	0	

## 4.3 Analysis of Habitat Availability

In cooperation with the Commission on Water Resource Management and others, the USGS conducted a study to assess the effects of surface water diversion systems on habitat availability for native stream species in northeast Maui. The goal was to determine a relationship between streamflow and habitat availability using a habitat selection model. Five out of 21 streams in the study area were selected for intensive study because they represented a range of hydrologic conditions (i.e., geograhic location, drainage area, terminal waterfall, estuary, human impacts, data availability, and access) present in the study area. By incorporating hydrology, stream morphology, and habitat characteristics, the model simulated habitat and streamflow relations for various species and life stages (Gingerich, 2005) in the 5 representative streams. Results of this habitat model, along with additional data from field reconnaissance surveys, aerial images, and GIS analyses, were extrapolated to estimate habitat availability in the remaining 16 streams. The outcome of the study was ultimately a map (Gingerich and Wolff, 2005, Plate 1) describing the habitat availability for native stream fauna in 21 streams in northeast Maui.

The study focused on certain native fish, snail and shrimp species found in Hawaiian streams. Three fish species of the Gobiidae family, also known as gobies, were considered: 1) alamoo (*Lentipes concolor* (Gill)); 2) nopili (*Sicyopterus stimpsoni* (Gill)); and 3) nakea (*Awaous guamensis* (Valenciennes)). The gobies of interest have a fused pelvic fin, allowing them to climb upstream. One of the fresh water snail species, *Neritina granosa* (Sowerby), commonly referred to as hihiwai, and the mountain shrimp, *Atyoida bisulcata* (Randall), also known as opae kalaole or mountain opae, were also considered in the study. Since opae and alamoo (adult and juvenile) do not typically live in the lower reaches, they were evaluated only in the middle and upper sites. The lower sites were evaluated for adult and juvenile nopili, adult nakea, and hihiwai.

Since Puohokamoa was not one of the intensely studied streams used to develop the streamflow-habitat relationship, results of the habitat simulation model were extraploted to estimate the stream habitat availability. Estimated natural and diverted median total and base flows were compiled from Gingerich (2005). Since streamflow measured during the habitat surveys was lower than estimated median total and

base flow under diverted conditions, it can be assumed that habitat measurements were made during the driest conditions. Results of the habitat simulation model can be summarized in Figure 4-2. The plot shows the relationship between diverted base flow (x-axis) and habitat availability (y-axis). The colored band indicates the range of values as defined by the 90 percent confidence level. If results from a particular site lie within this colored band, then there is only a 10 percent chance that the results will not be as predicted by the plot. In general, the plot shows that as base flow increases, the area of estimated usable streambed habitat for all interested species also increases. It also shows that "the addition of even a small amount of water to a relatively dry stream can have a significant effect on the amount of habitat available." For instance, when 20 percent. Estimates of expected habitat availability are representative for opae and alamoo upstream of large waterfalls.

Of the 70 miles of stream length within the study area, 36 miles have retained 75 to 100 percent of the natural habitat availability, 8 miles with 25 to 50 percent of the natural habitat, and 11 miles with no habitat at all because the stream reaches were dry (Table 4-3). Of the 36 miles with more than 75 percent natural habitat, 20 miles of the stream length were upstream from major diversion ditches. Figure 4-3 describes the habitat availability for Puohokamoa Stream and specific data are included in Table 4-4. Upstream of Wailoa Ditch where there are no major diversions, the stream has no reduction in flow and thus, retains 100 percent of the natural habitat. Between Wailoa and Manuel Luis Ditch where the stream was diverted, enough base flow could be maintained by ground water contribution to provide about 50 to 75 percent of the expected natural habitat for all species. Downstream from Manuel Luis Ditch, the stream is dry (no available habitat) until more ground water is gained to provide 38 to 48 percent of the expected natural habitat for all species except opae, and 58-62 percent of natural opae habitat under diverted conditions (11 percent of natural flow conditions). Near the coast, the stream retains enough water to provide over 50 percent of the expected habitat availability. Puohokamoa Stream does not terminate as a waterfall. Overall, about 25-50 percent of the natural habitat for all species in Puohokamoa Stream was already maintained downstream of all diversions.

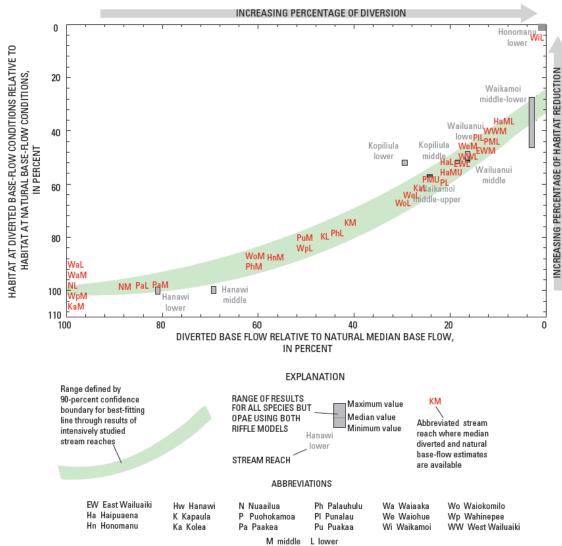


Figure 4-2. Relative habitat available for given relative base flow at studied streams. Relative change is the difference between natural and diverted conditions divided by natural conditions (Gingerich and Wolff, 2005).

Table 4-3. Summary of estimated aquatic habitat distribution at diverted base flow relative to natural conditions, calculated using GIS from Gingerich and Wolff (2005).

(miles)
26
10
10
8
11
5
70
-

\* The total linear miles of stream length differs from that presented in Ford et al. (2009) probably due to differences in digitization of the stream reaches from Gingerich and Wolff (2005), Plate 1.

Table 4-4. Summary of relative base flow and available habitat in Puohokamoa Stream (Source: Gingerich and Wolff, 2005, Table 10).

Stream site	Median b remaining (ft <sup>3</sup> /	in stream	Median base flow at diverted conditions relative to median base	Habitat available at diverted conditions (excluding opae) relative to habitat available at	Habitat available for opae at diverted conditions relative to habitat available at natural
	Diverted	Natural	flow at natural conditions (% of natural conditions)	natural conditions (% of natural conditions)	conditions (% of natural conditions)
lower (PL)	2.1	11	19	58-48	69-65
middle-lower (PML)	1.1	10	11	48-38	62-58
middle-upper (PMU)	2.0	8.4	24	63-53	72-68

[ft3/s is cubic foot per second; Numbers in bold italic are considered maximums at sites downstream of unquantified but known losing reaches]

## 4.4 Distribution of Native Freshwater Species

The HSA inventory was general in nature, resulting in major data gaps, especially those related to the distribution and abundance of aquatic organisms – native and introduced – inhabiting the streams. The State of Hawaii Division of Aquatic Resources (DAR) has since continued to expand the knowledge of aquatic biota in Hawaiian streams. Products from their efforts include the compilation and publication of an *Atlas of Hawaiian Watersheds and Their Aquatic Resources* for each of five major islands in the state (Kauai, Hawaii, Oahu, Molokai, and Maui). Each atlas describes watershed and stream features, distribution and abundance of stream animals and insect species, and stream habitat use and availability. Based on these data, a watershed and biological rating is assigned to each stream to allow comparison with other streams on the same island and across the state. The data presented in the atlases are collected from various sources, and much of the stream biota data are from stream surveys conducted by DAR. Figure 4-4 illustrates the DAR suvey locations on Puohokamoa Stream. Currently, efforts have been focused on updating the atlases with more recent stream survey data collected statewide, and developing up-to-date reports for Commission use in determining the interim IFS recommendations for east Maui. The following is a brief summary of findings for Puohokamoa Stream.

- Point Quadrat Survey. Only the native oopu alamoo (*Lentipes concolor*), oopu nakea (*Awaous guamensis*), and opae kalaole (*Atyoida bisulcata*) were observed in Puohokamoa Stream. During the more recent surveys, alamoo was observed in the middle reach below diversions. Introduced species of fish such as guppies (*Poecilia reticulata*) and river prawns (*Macrobrachium lar*) were observed in the middle reach as well. The poeciliid fishes dwell in the deep pools created above diversion structures and are known to transmit parasites to native fishes.
- **Insect Survey.** Native damselfly species were observed in the middle (below diversions) and upper reaches of Puohokamoa Stream. No damselfly species were observed in lower reach of the stream.
- Watershed and Biological Rating. Puohokamoa watershed rates fairly well (score of 8 out of 10) for Maui and statewide. A combination of forested lands, high rainfall amounts, and average stream reach diversity contribute to the rating of this watershed. However, the stream rates average (score of 5 out of 10) on biota due to the limited number of native species observed in the stream.

Overall, Puohokamoa Stream had reduced instream habitat for native species due to low streamflow. The three ditches (Koolau/Wailoa, Spreckels, and Manuel Luis/Center) were removing most of the water in

the stream. Stream habitat consisted of shallow pools with cobble, boulder and bedrock substrate. Puohokamoa Stream has the potential to sustain larger populations of native species than currently observed if flow is restored to the stream.

The SWCA Environmental Consultants, at the request of Hawaiian Commercial and Sugar Company, conducted a literature review of the existing data collected by DAR, USGS, and other investigators (Ford et. al., 2009). The objective of this document was to present biological information that may help the Commission in determining reasonable and beneficial instream and offstream uses of the surface water in east Maui. The authors stressed that no data exists to suggest "any of the nine native Hawaiian amphidromous species is at risk of either endangerment and/or extinction in east maui streams or else where in the State", and that dry reaches in diverted streams are periodically wetted by freshets, allowing streamflow continuity and the upstream migration of native species. On the other hand, there is no proof that continued habitat degradation in some of the streams due to dewaterment will not affect species survival (PR-2009-18, 85.0). Other investigators have reported that "hihiwai were limited to about 185 meters and 223 meters in the lower reaches of Waiohue and Waikolu Streams [Maui], respectively...and suggested this was due to the effect of dewaterment on habitat availability" (as cited in Ford et. al., 2009). It was also important to note that frequent changes in stream community structure, such as a change in the streambed composition due to a high flow event, that may result in absence of native stream animals should not be interpreted as a negative indicator of stream health.

The consultant summarized data mainly from the USGS habitat availability study (Gingerich and Wolff, 2005), and DAR's Atlas of Hawaiian Watersheds and Their Aquatic Resources (Tables 4-5 and 4-6). Please note that Commission staff is awaiting updated data from DAR and will supplement the following tables with new data. Compared with the other east Maui streams, a fair amount of stream animals were observed in Puohokamoa Stream. Opae kalaole, alamoo, and nakea were observed throughout the stream channel. However, extensive surveys conducted by the USGS revealed no alamoo above the diversions, and results from DAR surveys do no specifically indicate aquatice species observed above the diversions. According to Table 4-5, the opae was the most conspicuous species that was found in most of the east Maui streams except Punalau and Ohia. One alien amphidromous specie, the Tahitian prawn was also present in the stream. While Puohokamoa is mostly a gaining stream (see Chapter 3), habitat measurements from USGS were conducted during the driest conditions. Therefore, the absence of the other species in the Puohokamoa Stream may be due to a combination of drought conditions and dewaterment of the stream by the EMI System and the Maui DWS Upcountry System.

$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		East Maui Streams (T) = terminal falls	Kuhlia spp.	<i>Eleotris</i> sandwicensis	Stenogobius hawaiiensis	Awaous guamensis	Sicyopterus stimpsoni	Lentipes concolor	Neritina granosa	Neritina vespertinus	Macrobrachium lar (Alien amphidromous)	Macrobrachium grandimanus	Atyoida bisulcata
1       1	1       1	nodouc		×		×	×	×			×	×	×
1       N	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	anehoi											×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	ilea (T)	ND	ND	QN	ND	ND	ND	ND	ŊD	ND	ND	QN
ef (1)       N <td>ef (1)         ND         <th< td=""><td>aikamoi (T)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>×</td><td></td><td>×</td></th<></td>	ef (1)         ND         ND <th< td=""><td>aikamoi (T)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>×</td><td></td><td>×</td></th<>	aikamoi (T)									×		×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	ahinepe'e (T)	QN	ND	QN	DN	ND	QN	ND	ŊD	QN	ND	QN
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	iipua'ena (T)						×			×		×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	ohokamoa				×		×			×		×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	nalau				×	×	×			×		
///indiau       x       x       x       x       x       x         ///indiau       x       x       x       x       x       x       x         indiau       x       x       x       x       x       x       x       x         indiau       x       x       x       x       x       x       x       x       x         indiau       x <td><ul> <li><i>V</i>PY(na'au</li> <li><i>V</i>PY(na</li></ul></td> <td>nomanū</td> <td></td> <td>×</td>	<ul> <li><i>V</i>PY(na'au</li> <li><i>V</i>PY(na</li></ul>	nomanū											×
/Pfinatu       X<	/Plina(au       X       X       X       X       X       X         III0(T)       X       X       X       X       X       X       X         III       X	ia`ailua				×	×	×	×	×	×		×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		lauhulu/Pi'ina'au	×	×	×	×	×	×	×	×	×	×	×
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	nia							×				
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	iokamilo (T)				×					×		×
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		ailua Nui	×	×		×		×			×		×
$ \begin{array}{c} \times \\ \times $	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Wailua Iki	×			×		×	×		×		×
$ \begin{array}{c} \times \\ \times $	$ \begin{array}{c} \times \times \times \\ \times $	Wailua Iki	×	×		×		×	×		×		×
	<ul> <li>×</li> <li>×&lt;</li></ul>	piliula	×	×		×	×	×	×		×		×
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		aiohue	×	×	×	×	×	×	×	×	×	×	×
		akea (T)				×		×	×		×		×
		paula											×
× × × ×	× × × ×	inawī	×	×	×	×	×	×	×		×		×
		akapipi	×	×		×	×	×			×		×

Table 4-5. Known distribution of amphidromous species in east Maui streams (Ford et. al., 2009, Table 3).

[X = present; ND = no data]

STREAM		r of Amphid ecies Repor	Terminal Waterfall	Number of Non- Native Species	
	Lower	Middle*	Upper**	waterian	Reported
Kolea	ND	ND	ND	$\checkmark$	ND
Waikamoi		1	2	-/	5
Waikamoi – Alo***			1	$\checkmark$	5
Wahinepe'e	ND	ND	ND	$\checkmark$	ND
Puohokamoa	4	3	2		1
Haipua`ena	1	3	1	$\checkmark$	4
Punalau	2	1	1		2
Honomanu	1		1		
Nua'ailua	6	5	2		2
Pi'ina'au / Palauhulu	10	6	4		9
'Ōhi'a	1				
Waiokamilo		2	2	$\checkmark$	8
Wailuanui	10	6	5		5
West Wailuaiki	4	4	1		7
East Wailuaiki	5	2	1		1
Kopiliula / Puaka'a	4	7	6		3
Waiohue	10	5	4		2
Pa'akea	5	2	1	$\checkmark$	1
Waia'aka	ND	ND	ND		
Kapā'ula			1		
Hanawi	7	7	2		2
Makapipi	4	5	2		6

Table 4-6. Distribution of amphidromous species in lower, middle, and upper reaches of east Maui streams within the USGS stydt area summarized from USGS and DAR sources. (Source: Ford et. al., 2009, Table 4)

#### Key to Table:

ND = no data

\* Above diversion structures in some reaches

\*\* Above diversion structures

\*\*\* Waikamoi and its tributary Alo are counted as one stream.

#### 4.5 Other Critical Habitats

Another important consideration of fish and wildlife habitat is the presence of critical habitat. Under the Endangered Species Act, the U.S. Fish and Wildlife Service is responsible for designating critical habitat for threatened and endangered species. Though there are very few threatened or endangered Hawaiian species that are directly impacted by streamflow (e.g., Newcomb's snail), the availability of surface water may still have indirect consequences for other species. Based upon current designations, there are no known critical habitat areas for fish and wildlife associated with Puohokamoa Stream.

In addition to critical habitat, the presence of native bird habitat should not be overlooked. Bird habitat ranges from urban environments and grasslands, to wetlands and native rainforests. Within these habitat ranges, streams provide an important source of food and water for native birds. Springs flow into loi and fishponds where native waterbirds, such as the *aukuu* (black-crowned night-heron) and the *koloa* (Hawaiian duck), search for food and locations to build a nest for their young. Streams are also valuable indicators of forest health. Since the headwaters of streams typically originate from forested areas, a

forest with dense vegetation, especially along the stream bank would help prevent erosion, thus yielding cleaner fresh water for fish and wildlife as well as water demands in the lowland areas.

A diversity of native birds can be found in east Maui. Some of the notable species found in Haleakala National Park include the Hawaii (Dark-rumped) Petrel, *Nene* (Hawaiian Goose), and Common *Amakihi* (Pratt, 1993). Within Waikamoi Preserve and the northeast slope of Haleakala above 4,000 feet, the species found are the Maui Parrotbill, Maui Creeper, and *Akohekohe* (Crested Honeycreeper). The *Iiwi*, Red-billed Leiothrix, and *Apapane* are more common in Waikamoi Preserve. The U.S. Fish and Wildlife Service (n.d.) estimated the habitat ranges for native Hawaiian forest birds based on vegetation boundaries. Figure 4-5 illustrates the native forest bird habitat spans in the hydrologic unit of Puohokamoa. While most native birds are found at the upper elevations, some species, especially *Amakihi* and *Apapane*, are also found at the lower elevations (PR-2009-18, 75.0).

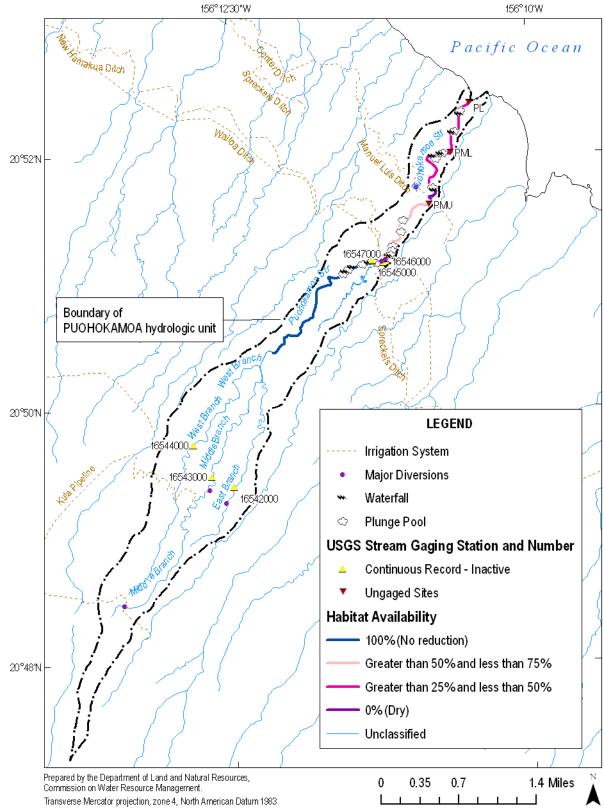


Figure 4-3. Estimated habitat availability in Puohokamoa hydrologic unit (Source: Gingerich and Wolff, 2005; USGS 2001b).

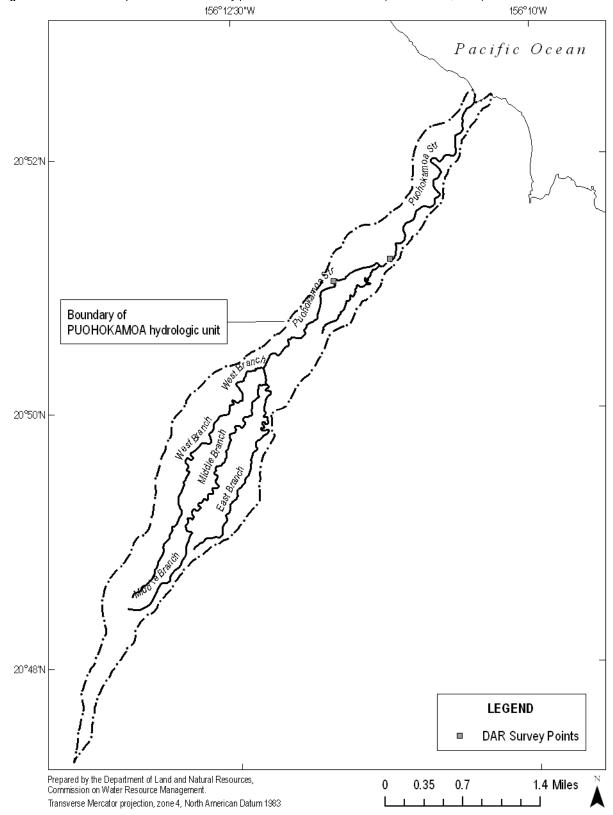


Figure 4-4. Division of Aquatic Resource survey point in Puohokamoa Stream (Source: DAR, 2009).

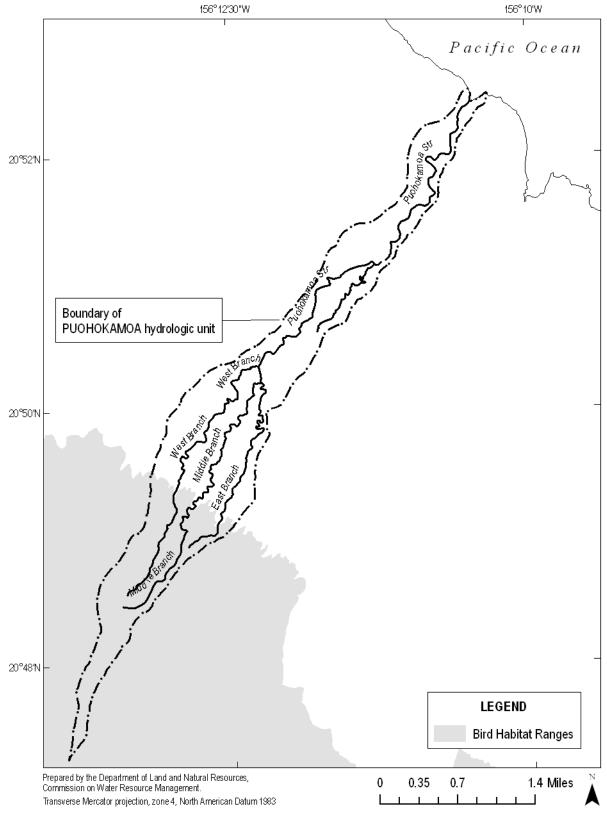


Figure 4-5. Native Hawaiian forest habitat ranges in Puohokamoa hydrologic unit (Source: U.S. Fish and Wildlife Service, n.d; USGS 2001b).

## 5.0 Outdoor Recreational Activities

Water-related recreation is an integral part of life in Hawaii. Though beaches may attract more users, the value of maintaining streamflow is important to sustaining recreational opportunities for residents and tourists alike. Streams are often utilized for water-based activities, such as boating, fishing, and swimming, while offering added value to land-based activities such as camping, hiking, and hunting. Growing attention to environmental issues worldwide has increased awareness of stream and watershed protection and expanded opportunities for the study of nature; however, this must be weighed in conjunction with the growth of the eco-tourism industry and the burdens that are placed on Hawaii's natural resources.

The State of Hawaii Department of Health (DOH) maintains water quality standards (HAR 11-54) for recreational areas in inland recreational waters based on the geo-mean of *Enterococcus*, a fecal indicator: 33 colony-forming units per 100 mL of water or a single-sample maximum of 89 colonies per 100 mL. This is for full-body contact (swimming, jumping off cliffs, etc.). If *Enterococcus* exceeds those values, the water body is considered to be impaired. DOH also has a standing advisory for *Leptospirosis* in all freshwater streams. The marine recreational zone, which extends from the shoreline seaward to 1,000 feet from shore, requires an *Enterococci* geo-mean of less than 7 colony-forming units per 100 mL of water, to protect human health.

The recreational resources of Puohokamoa Stream were classified as "substantial" by the HSA's regional recreation committee. The HSA identified opportunities for hunting, swimming, and scenic views related to Puohokamoa (Table 5-1). Of the three recreational opportunities, only swimming was considered to be a high-quality experience (National Park Service, Hawaii Cooperative Park Service Unit, 1990).

able 5-1. Hawall S	tream Ass	essment	Survey or	recreation	iai opporti	unities by	type of ex	penence.
	Urk	ban	Cou	intry	Semi-	Vatural	Nat	ural
	Norm	High	Norm	High	Norm	High	Norm	High
Camping								
Hiking								
Fishing								
Hunting					-			
Swimming								
Boating								
Parks								
	Tr	ail	Ro	ad	Oc	ean	A	ir
Scenic Views								
	Educa	tional	Bota	nical				
Nature Study								

Table 5-1. Hawaii Stream Assessment survey of recreational opportunities by type of experience.

According to public hunting data, Hunting Unit B on the island of Maui consists of portions of the Koolau Forest Reserve. The hunting area is approximately 1.8 square miles or 56 percent of the Puohokamoa hydrologic unit, and it lies within the lower half of the hydrologic unit (Figure 5-1). A permit is required for the hunting of wild pigs and goats, using rifles, shotguns, bows and arrows, and dogs. Bag limits are two pigs and two goats of either sex per day, while the hunting season is open year-round on Saturdays, Sundays, and State holidays. Handguns are allowed for the hunting of pigs with or without dogs.

Since changes to streamflow and stream configurations have raised concerns regarding their impact to onshore and near-shore activities, the Commission attempted to identify these various activities in relation to Puohokamoa Stream. A 1981 Maui Resource Atlas, prepared by the State of Hawaii Department of Transportation's Harbors Division, inventoried coral reefs and coastal recreational activities. Looking at available GIS data, the Commission identified the following activities that were known to occur or observed at or near Puohokamoa: spear fishing, trolling/bottom fishing, and opihi picking (Figure 5-2).

John Clark, in his book The Beaches of Maui County (1989), describes the Puohokamoa area as follows:

The shoreline from Maliko to Honomanū is characterized by high, steep sea cliffs. Within this long reach of cliffs are a number of bays that are usually little more than wide, moderately deep indentations in the shoreline, usually where streams meet the ocean. The beaches in these areas are narrow stretches of large boulders lying directly at the base of the sea cliffs. Many of these boulder beaches are not accessible at all by land, and if they are, it is only by a hazardous climb using a rope or cable to get down the cliffs. During the winter and spring months these bays are assaulted by heavy surf that sweeps completely across the boulders against the sea cliffs. There are no fringing reefs to check the advance of surf or strong currents. Over the years many fishermen have lost their lives along this dangerous coastline. These rough waters have long been excellent grounds for netting *akule* and ' $\bar{o}pelu$  and for hooking 'u' $\bar{u}$ , ' $\bar{a}weoweo$ , and  $\bar{a}hole$ .

There is no public access to any of these shoreline areas except from the ocean. Many of the bays are over one mile away from the Hāna Highway, and all of the land between the highway and the shoreline is private property replete with locked gates and No Trespassing signs.

Another element of recreation is the unique educational opportunities that streams provide for nature study. One way to approach this is to identify established study sites or nature centers that offer structured learning programs. In lieu of that, the Commission considered available GIS data to identify schools in proximity to Puohokamoa Stream that may utilize the stream as part of its curriculum. The Commission did not identify any educational facilities in the area.

See Figure 5-2 for the locations of various recreation-related points of interest. It is important to note that the recreational activities are not limited to the ocean as the figure may suggest. The stream and the surrounding areas are also used for recreational purposes (e.g., hiking, swimming).

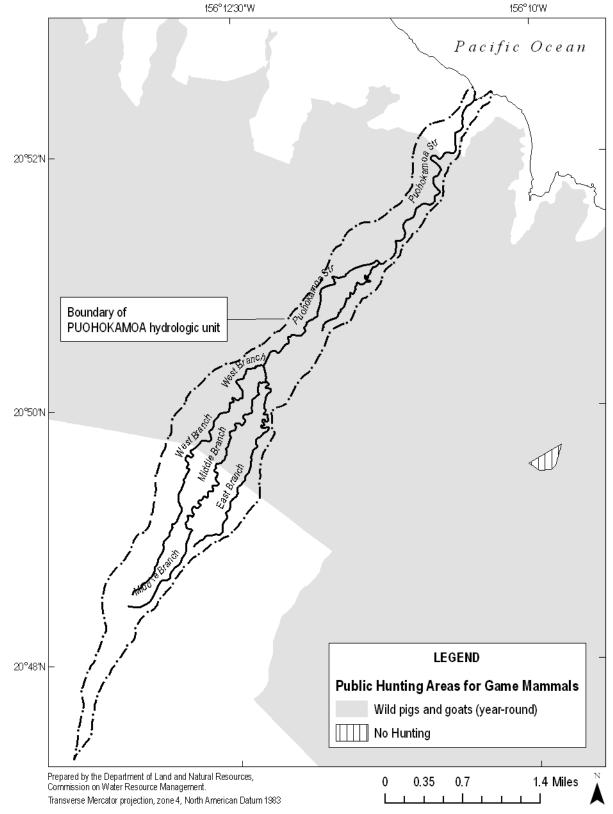


Figure 5-1. Public hunting areas for game mammals in Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2002b).

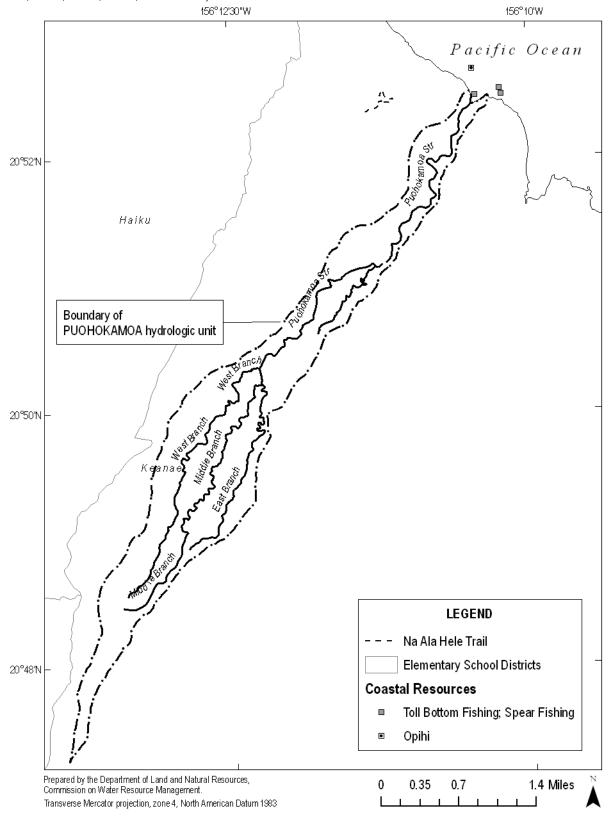


Figure 5-2. Recreational points of interest for Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 1999, 2002a; 2002c; 2002d; 2004a; USGS 2001b).

## 6.0 Maintenance of Ecosystems

An ecosystem can be generally defined as the complex interrelationships of living (biotic) organisms and nonliving (abiotic) environmental components functioning as a particular ecological unit. Depending upon consideration of scale, there may be a number of ecosystem types that occur along a given stream such as estuaries, wetlands, and stream vegetation, according to the State Water Code. Figure 6-1 provides a simplified ecosystem represented in a Hawaiian stream. The entire hydrologic unit, as it relates to hydrologic functions of the stream, could also be considered an ecosystem in a very broad context.

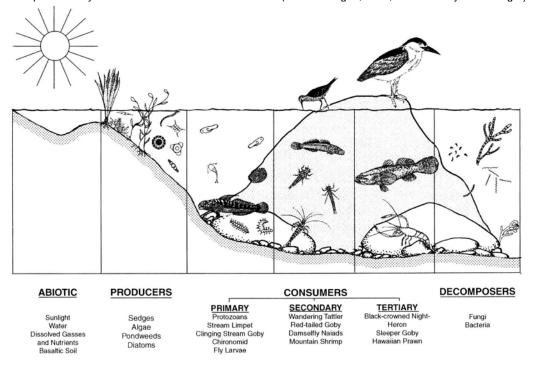


Figure 6-1. Simplified ecosystem illustrated in a Hawaiian stream. (Source: Ziegler, 2002, illustration by Keith Kruger).

The Hawaiian resource-use concept of ahupuaa is closely related to the Western concepts of ecosystem maintenance. Native Hawaiians generally utilized natural resources within the limits of their ahupuaa; therefore, it was important to manage and conserve the resources within their living unit. Likewise, watershed resources must be properly managed and conserved to sustain the health of the stream and the instream uses that are dependent upon it.

The riparian resources of Puohokamoa Stream were classified as "substantial" by the HSA (National Park Service, Hawaii Cooperative Park Service Unit, 1990). The HSA ranked the streams according to a scoring system using six of the seven variables presented in Table 6-1. Detrimental organisms were not considered in the final ranking; however, their presence and abundance are considerable ecosystem variables.

Table 6-1. Hawaii Stream Assessment indicators of riparian resources for Puohokamoa Stream.

Category	Value
Listed threatened and endangered species: These species are generally dependent upon undisturbed habitat. Their presence is, therefore an indication of the integrity of the native vegetation. The presence of these species along a stream course was considered to be a positive attribute; with the more types of threatened and endangered species associated with a stream the higher the value of the resource. Only federally listed threatened or endangered forest or water birds that have been extensively documented within the last 15 years were included.	None
Recovery habitat: Recovery habitat consists of those areas identified by the USFWS and DLNR as essential habitat for the recovery of threatened and endangered species. Streams that have recovery habitat anywhere along their length were included.	None
Other rare organisms and communities: Many species that are candidates for endangered or threatened status have not been processed through all of the requirements of the Endangered Species Act. Also a number of plant communities associated with streams have become extremely rare. These rare organisms and communities were considered to be as indicative of natural Hawaiian biological processes as are listed threatened and endangered species.	None
Protected areas: The riparian resources of streams that pass through natural area reserves, refuges and other protected areas are accorded special protection from degradation. Protected areas were so designated because of features other than their riparian resources. The presence of these areas along a stream, however, indicates that native processes are promoted and alien influences controlled.	Partially protected
Wetlands: Wetlands are important riparian resources. They provide habitat for many species and are often important nursery areas. Because they are often extensive areas of flat land generally with deep soil, many have been drained and converted to agricultural or urban uses. Those that remain are, therefore, invaluable as well as being indicators of lack of disturbance.	Less than ½-square mi. of palustrine wetlands identified by USFWS
Native forest: The proportion of a stream course flowing through native forest provides an indication of the potential "naturalness" of the quality of a stream's watershed; the greater the percentage of a stream flowing through native forest most of which is protected in forest reserves the more significant the resource. Only the length of the main course of a stream (to the nearest 10 percent) that passes through native forest was recorded.	40%
Detrimental organisms: Some animals and plants have a negative influence on streams. Wild animals (e.g., pigs, goats, deer) destroy vegetation, open forests, accelerate soil erosion, and contaminate the water with fecal material. Weedy plants can dramatically alter the nature of a stream generally by impeding water flow. Three species, California grass, hau, and red mangrove, are considered to have the greatest influence. The presence of any of these animals or plants along a stream course was considered a potentially negative factor, while the degree of detriment is dependent on the number of species present.	2 (Hau, Pigs)

For the purpose of this section, management areas are those locales that have been identified by federal, state, county, or private entities as having natural or cultural resources of particular value. The result of various government programs and privately-funded initiatives has been a wide assortment of management areas with often common goals. Such designated areas include forest reserves, private preserves, natural area reserves, wildlife sanctuaries, national parks, historic landmarks, and so on. In Puohokamoa, about 56 percent of the unit lies within the Koolau Forest Reserve, and less than 1 percent within the Waikamoi Preserve (Table 6-2).

Table 6-2. Management areas located within Puohokamoa hydrologic unit.	(Source: State of Hawaii, Division of Forestry and
Wildlife, 2008a; State of Hawaii, Office of Planning, 2007b).	

Area Name	Managed by	Area (mi²)	Percent of Unit
Koolau Forest Reserve	State Division of Forestry and Wildlife	1.76	56.0
that are managed by DLN that incorporate various, a System include: 1) Protect into the future; 2) Mainta	ve, consisting of over 31,000 acres (48.45 sq. mi.) is one JR's Division of Forestry and Wildlife. These reserves a and often competing, public uses and benefits. The man et and manage forested watersheds for production of fres in biological integrity of native ecosystems; 3) Provide p by assisting in the production of high quality forest produ-	re established as m agement goals of th h water supply for j bublic recreational of	ulti-use land areas the Forest Reserve public uses now and opportunities; and 4)
Waikamoi Preserve	The Nature Conservancy	0.02	0.7
5,230 acres (8.16 sq. mi.) including 63 species of ra owned by the Haleakala I	is managed by The Nature Conservancy of Hawaii (TNC). The preserve was established in 1983 to protect the un are plants and 13 species of birds (seven are endangered) Ranch Company, were conveyed to TNCH through a per the National Park Service and the East Maui Watershe through TNCH.	ique native biodive . The management manent conservation	rsity of east Maui rights of the land, on easement. Public

In addition to the individual management areas outlined above, Watershed Partnerships are another valuable component of ecosystem maintenance. Watershed Partnerships are voluntary alliances between public and private landowners who are committed to responsible management, protection, and enhancement of their forested watershed lands. There are currently nine partnerships established statewide, three of which are on Maui. Table 6-3 provides a summary of the partnership area, partners, and management goals of the East Maui Watershed Partnership.

Table 6-3. Watershed partnerships associated with Puohokamoa hydrologic unit. (Source: State of Hawaii, Division of Forestry and Wildlife, 2008b; East Maui Watershed Partnership, 1993).

Management Area	Year Established	Total Area (mi²)	Area (mi²)	Percent of Unit		
East Maui Watershed Partnership	1991	186.73	3.00	95.3		
The East Maui Watershed Partnership (EMWP) is comprised of the County of Maui, State Department of Land and Natural Resources, East Maui Irrigation Co. Ltd., Haleakala National Park, Haleakala Ranch Company, Keola Hana Maui, Inc. (Hana Ranch Company), and The Nature Conservancy. The management priorities of the EMWP include: 1) Watershed resource monitoring; 2) Animal control; 3) Weed control; 4) Management infrastructure; and 5) Public education and awareness programs. The EMWP has conducted various projects including the construction of over seven miles of fence construction and on-going fence maintenance, the survey and removal of invasive plant species, eradication of animal species through an expanded hunting program, implementation of runoff and stream protection						

In 1974, the U.S. Fish and Wildlife Service (USFWS) initiated a National Wetlands Inventory that was considerably broader in scope than an earlier 1954 inventory that had focused solely on valuable waterfowl habitat. The inventory for Hawaii was completed in 1978 and utilized a hierarchical structure in the classification of various lands. The USFWS defines wetlands as "lands transitional between terrestrial and aquatic systems where the water table is usually at or near the surface or the land is covered by shallow water" (Cowardin et al., 1979). Approximately 76 percent of Puohokamoa is classified as non-tidal palustrine wetlands dominated by trees, shrubs, persistent emergents, emergent mosses or lichens, or wetlands that occur in tidal areas where salinity due to ocean-derived salts is below 0.5 percent.

System Type	Class	Regime	Area (mi <sup>2</sup> )	Percent of Unit
Palustrine	Forested, broad-leaved evergreen	Semipermanent non-tidal	1.80	57.1
Palustrine	Forested, broad-leaved evergreen	Seasonal/Unknown non-tidal	0.20	6.2
Palustrine	Scrub/shrub, broad-leaved evergreen	Seasonal/Unknown non-tidal	0.40	12.8

A series of vegetation maps describing upland plant communities was prepared as part of a USFWS survey in 1976 to 1981 to determine the current status of native forest birds and their associated habitats. Table 6-5 and Figure 6-3 present the portion of the hydrologic unit (~1000 feet above mean sea level) that was surveyed and the degree of disturbance of native forest. Nearly 80 percent of the unit (upper slopes) is predominately native species with little or no alien species.

Table 6-5. Distribution of native and alien plant species for Puohokamoa hydrologic unit. (Source: Jacobi, 1989).

Canopy Type	Area (mi <sup>2</sup> )	Percent of Unit
Communities totally dominated by native species of plants	2.50	79.4
Communities dominated by introduced species but contain remnant populations of native species; no native community structure remaining	0.09	2.7
Communities that are totally dominated by introduced plants; virtually no native species remaining	0.02	0.5

Based upon the current designations, the Puohokamoa hydrologic unit contains critical habitat areas for five plant species (Table 6-6).

Table 6-6. Percentage of critical habitat areas for Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Plann	ning,
2004b).	-

Scientific Name	Common/Hawaiian Name	Description	Area (mi²)	Percent of Unit
Brighamia rockii	Pua 'ala	Plant	0.01	0.2
Cyanea hamatiflora ssp. hamatiflora	No common name	Plant	1.16	36.8
Cyanea mceldowneyi	No common name	Plant	1.03	32.6
Diplazium molokaiense	No common name	Plant	0.08	2.5
Phyllostegia mannii	No common name	Plant	0.37	11.7

The density of threatened and endangered plant species is high at elevations above 1,300 feet, while the rest of the Puohokamoa hydrologic unit, roughly 14 percent, has a low concentration of threatened and endangered plant species at lower elevations (Table 6-7 and Figure 6-4).

Table 6-7. Density of threatened and endangered plants for Puohokamoa hydrologic unit. (Source: State of Hawaii, Office of Planning, 1992).

Density	Area (mi²)	Percent of Unit
High concentration of threatened and endangered species	2.70	85.6
Low concentration of threatened and endangered species	0.45	14.4

A current working paper is being developed by the University of Hawaii's Economic Research Organization (UHERO), entitled *Environmental Valuation and the Hawaiian Economy*, which discusses the use of existing measures of economic performance and alternative statistical devices to provide an economic valuation of threatened environmental resources. The paper focuses on the Koolau, Oahu watershed and illustrates three categories of positive natural capital (forest resources, shoreline resources, and water resources) against a fourth category (alien species) that degrades natural capital. In the case of the Oahu Koolau forests, a benchmark level of degradation is first defined for comparison against the current value of the Oahu Koolau system. The Oahu Koolau case study considers a hypothetical major disturbance caused by a substantial increased population of pigs with a major forest conversion from native trees to the non-indigenous Miconia (*Miconia calvescens*), along with the continued "creep" of urban areas into the upper watershed (Kaiser, B. et al., n.d.).

Recognizing that in the United States, the incorporation of environmental and natural resource considerations into economic measures is still very limited, the paper provides the estimated Net Present Value (NPV) for "Koolau [Oahu] Forest Amenities." These values are presented in Table 6-8.

Amenity	Estimated Net Present Value (NPV)	Important limitations
Ground water quantity	\$4.57 to \$8.52 billion NPV	Optimal extraction assumed.
Water quality	\$83.7 to \$394 million NPV	Using averted dredging cost estimates.
In-stream uses	\$82.4 to \$242.4 million NPV	Contingent valuation estimate for a single small fish species.
Species habitat	\$487 to \$1,434 million NPV	Contingent valuation estimate for a single small bird species.
Biodiversity	\$660,000 to \$5.5 million NPV	Average cost of listing 11 species in Koolaus.
Subsistence	\$34.7 to \$131 million NPV	Based on replacement value of pigs hunted.
Hunting	\$62.8 to \$237 million NPV	Based on fraction of hunting expenditures in state. Does not include damages from pigs to the other amenities.
Aesthetic values	\$1.04 to \$3.07 million NPV	Contingent valuation; Households value open space for aesthetic reasons.
Commercial harvests	\$600,000 to \$2.4 million NPV	Based on small sustainable extraction of koa.
Ecotourism	\$1.0 to \$2.98 billion NPV	Based on fraction of direct revenues to ecotourism activities.
Climate control	\$82.2 million	Based on replacement costs of contribution of all tropical forests to carbon sequestration.
Estimated value of joint services:	\$7.444 to \$14.032 billion	*

Table 6-8. Estimated Net Present Value (NPV) for Koolau (Oahu) Forest Amenities (Source: Kaiser, B. et al., n.d.).

Following upon the results of the Oahu Koolau case study, the paper provides a brief comparison with the east Maui forests, noting the particular importance of the east Maui watershed as the single largest source of surface water in the state, home to some of the most intact and extensive native forests left in Hawaii, along with having the State's largest concentration of endangered forest birds. In both cases, the Oahu Koolaus and east Maui, the most valuable aspects of the forested areas are believed to be ecotourism, aesthetic pleasure, species habitat, water quality, and water quantity. Both regions are roughly the same size; however, the east Maui forests may have greater value due to greater species diversity and native habitat, and the County of Maui's dependence upon surface water as a drinking water source (water quality) (Kaiser, B. et al., n.d.).

156°12'30"W 156°10'W Pacific Ocean 20°52'N KOOLAU FOREST RESERVE Boundary of PUOHOKAMOA hydrologic unit 20°50'N LEGEND Reserves 20°48'N Wetlands Palustrine Forested Wetland Palustrine Scrub/Shrub Wetland WAIKAMOI PRESERVE Prepared by the Department of Land and Natural Resources, Commission on Water Resource Management. 0 0.35 0.7 1.4 Miles Transverse Mercator projection, zone 4, North American Datum 1983

Figure 6-2. Reserves and wetlands for the Puohokamoa hydrologic unit (Source: State of Hawaii, Office of Planning, 2003; 2007b; USGS 2001b).

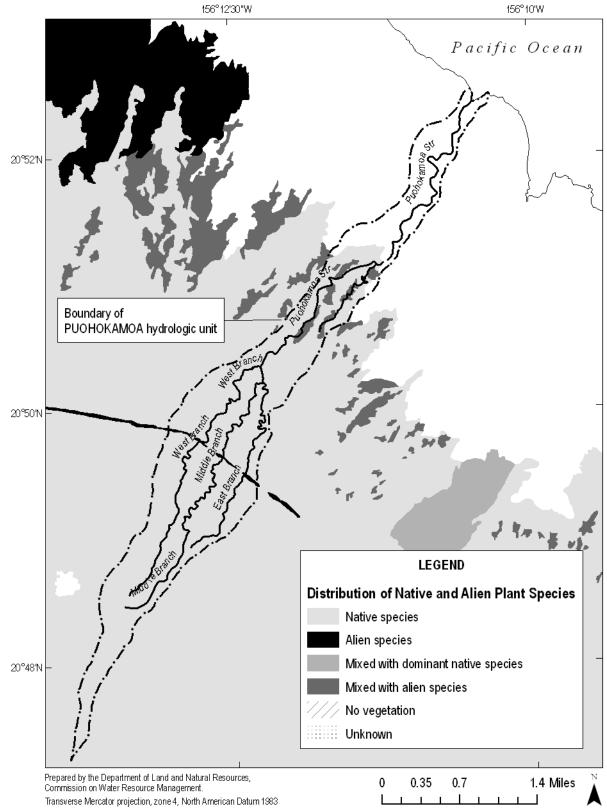


Figure 6-3. Distribution of native and alien plant species for Puohokamoa hydrologic unit (Source: Jacobi, 1989; Scott et al., 1986; State of Hawaii, Office of Planning, 1992, 2004b; 2004d; USGS 2001b).

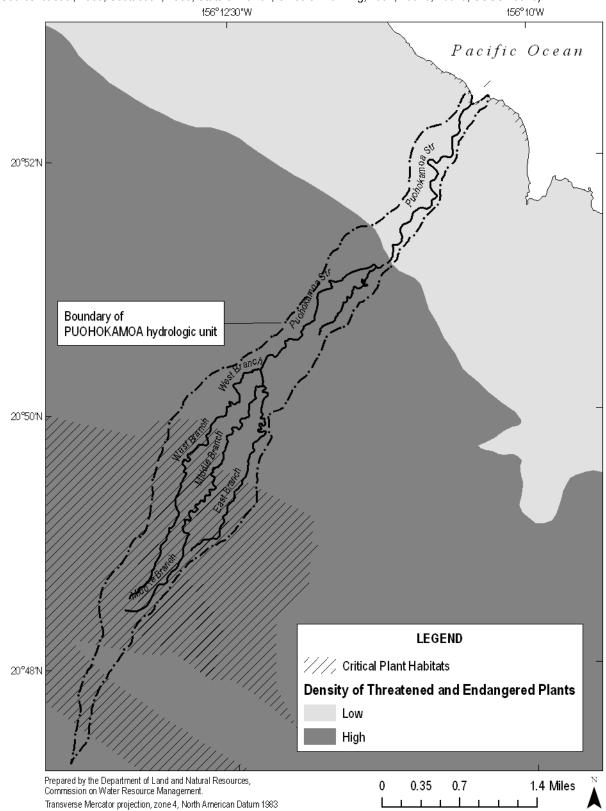


Figure 6-4. Critical plant habitats, and density of threatened and endangered plant species for Puohokamoa hydrologic unit (Source: Jacobi, 1989; Scott et al., 1986; State of Hawaii, Office of Planning, 1992, 2004b; 2004d; USGS 2001b).

#### 7.0 Aesthetic Values

Aesthetics is a multi-sensory experience related to an individual's perception of beauty. Since aesthetics by definition is a subjective observation, a stream's aesthetic value cannot be determined quantitatively (Wilson Okamoto & Associates, Inc., 1983). However, there are certain elements, either within or surrounding a stream, which appeal to an observer's visual and auditory senses, such as waterfalls and cascading plunge pools. Several assumptions were made in identifying the elements that give Puohokamoa Stream a particular aesthetic quality.

Puohokamoa Stream is fed by lush native communities of Ohia forests and forested wetlands that dominate the upper and intermediate slopes of the hydrologic unit. Vegetation surrounding the lower reaches of Puohokamoa Stream is predominately alien forests that lie within the Koolau Forest Reserve. A number of waterfalls are located along the middle and lower reaches of the stream, most of which are followed by a plunge pool. Among the many waterfalls is Puohokamoa Falls that is about 20-foot high and it can be seen from Hana Highway. Keopuka Rock, a State seabird sanctuary, can be seen from the shoreline of the hydrologic unit (Figure 7-1).

In a 2007 Hawaii State Parks Survey, released by the Hawaii Tourism Authority (OmniTrak Group Inc., 2007), scenic views accounted for 21 percent of the park visits statewide, though that was a decrease from 25 percent in a 2003 survey. Other aesthetic-related motivations include viewing famous landmarks (9 percent), hiking trails and walks (7 percent), guided tour stops (6 percent), and viewing of flora and fauna (2 percent). On the island of Maui, visitors' preference to visit state parks for scenic views (26 percent) was second only to uses for outings with family and friends (29 percent). In comparison, residents primarily used state parks for ocean/water activities (30 percent), followed by outings with friends and family (28 percent), and then scenic views (9 percent). Overall, Maui residents were very satisfied with scenic views giving a score of 9.7 (on a scale of 1 to 10, with 10 being outstanding), with out-of-state visitors giving a score of 9.3. Though there are no state parks located in the hydrologic unit, it is assumed that where Puohokamoa Stream crosses Hana Highway there may be opportunities for scenic enjoyment. The scenic Hana Highway route to Hana town is a popular tourist attraction (PR-2009-18, 85.0), in which visitors take photos of waterfalls and the valley where the stream crosses Hana Highway.

While a limited number of studies analyze the value of a free flowing stream, a stream that has mauka to maki flow could have direct economic benefits to the State and to the public. According to a Maui resident (PR-2009-18, 85.0), several Maui eco-tour companies are willing to pay the state \$5 for each person that is allowed to enter and view one of the streams in west Maui that has mauka to makai flow. The State would potentially collect \$60,000 a year for 12,000 participants.

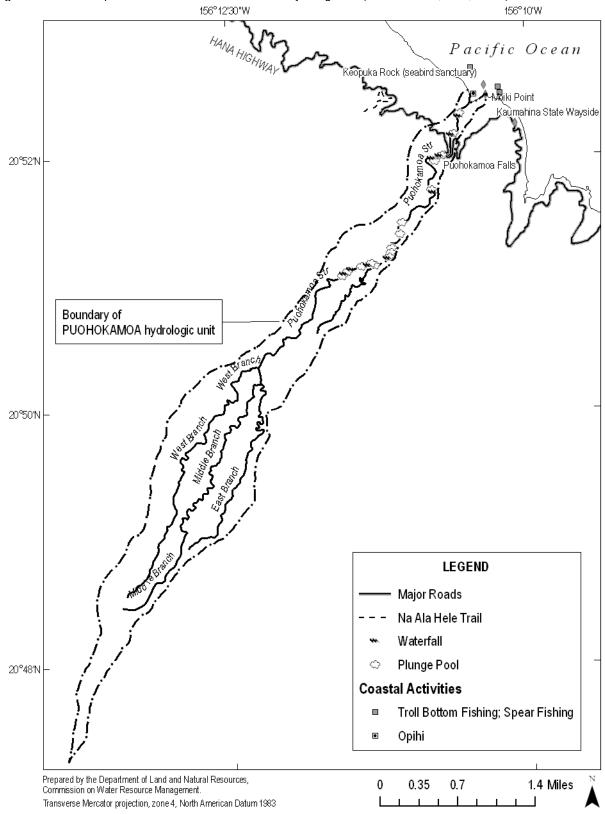


Figure 7-1. Aesthetic points of interest for the Puohokamoa hydrologic unit (Source: USGS, 1996; 2001b).

### 8.0 Navigation

The State Water Code, Chapter 174C, HRS, includes navigation as one of nine identified instream uses; however, it fails to further define navigation. Navigational water use is largely defined as water utilized for commercial, and sometimes recreational, transportation. In the continental United States, this includes water used to lift a vessel in a lock or to maintain a navigable channel level. Under the provisions of the Clean Water Act, navigable waters also include wetlands (State of Nevada, Department of Conservation and Natural Resources, Division of Water Resources, n.d.).

Hawaii streams are generally too short and steep to support navigable uses. If recreational boating (primarily kayaks and small boats) is included under the definition of navigation, then there are only a handful of streams statewide that actually support recreational boating and even fewer that support commercial boating operations. Kauai's Wailua River is the only fresh water waterway where large boat commercial operations exist, and no streams are believed to serve as a means for the commercial transportation of goods.

The hydrologic unit of Puohokamoa is not known to support any instream uses of navigation.

## 9.0 Instream Hydropower Generation

The generation of hydropower is typically accomplished through instream dams and power generators; however, the relatively short lengths and flashy nature of Hawaii's streams often require water to be diverted to offstream power generators. In these "run-of-river" (i.e., utilizes water flow without dams or reservoirs) designs, water is diverted through a series of ditches, pipes, and penstocks to the powerplant, and then returned to the stream. Some designs call for the powerplant to be situated such that the drop of water level (head) exiting the plant can be sent to fields for crop irrigation.

Considering the definition of instream hydropower generation, there are no known true instream hydropower systems located on Puohokamoa Stream, nor has the potential for hydropower generation been identified in previous reports (W.A. Hirai & Associates, Inc., 1981).

While the following information should perhaps be a part of Section 13.0, Noninstream uses, it has been included here for further consideration. Carol Wilcox, in her book *Sugar Water: Hawaii's Plantation Ditches* (1996), describes the use of surface water for generating hydroelectricity by Hawaiian Commercial and Sugar Company as follows:

On Maui, Hawaiian Commercial and Sugar Company (HC&S) had three hydroelectric plants, all utilizing water collected by the East Maui Irrigation Company (EMI) irrigation system. The earliest, Paia Hydro, was built by Maui Agricultural Company in 1912 with a 800-kilowatt capacity. In 1923, the penstock was extended to a higher elevation, thus increasing the capacity to 1000 kilowatts. HC&S built a 4000-kilowatt hydroplant at Kaheka in 1924. In 1982, a 500-kilowatt hydroelectric powerplant was installed at the Hamakua Ditch above Paia. Located only 50 feet below the Wailoa Forebay, this "low-head" hydroplant takes water through a 36-inch pipe and discharges it into the Hamakua Ditch.

Besides these three hydros, HC&S has a bagasse-powered steam powerplant at the Paia factory, and the Central Powerplant, built in 1918, located at Kahului. In 1921, electric lighting was brought to the camp houses. By the 1930s this was the largest plantation power system in Hawaii, with a 12,000-kilowatt capacity. The largest consumer was the water pumps (6000 kilowatts), then the factory (1500 kilowatts), and general uses such as lighting, feed mill, dairy, carpentry shop, refrigerator plants, machine shops, and "talkie movie houses" (400 kilowatts). Surplus power (900 kilowatts) was sold to Kahului Railroad Company and to Maui Electric Company. The Central Powerplant supplied power for all of central Maui until after World War II. In 1984, the combined total capacity of all HC&S power-generating systems was rated at 37,300 kilowatts.

HC&S continues to operate three run-of-river hydroelectric facilities on the Wailoa Ditch, which is supplied with water from several sources including Puohokamoa Stream. Power generated from these facilities is used to satisfy sugar mill power requirements first, while remaining electricity not used by the mill is sold to Maui Electric Company (MECO). According to MECO, power is sold as available, with an estimated oil savings of 16,200 barrels per year. The hydraulic turbine generators located at the Kaheka, Paia, and Hamakua facilities on the Wailoa Ditch are capable of producing 4.5 megawatts, 1.1 megawatts, and 150 megawatts, respectively (Hew, personal communication, August 2009).

An "Amended and Restated Power Purchase Agreement" between HC&S and MECO, dated 1989, details the terms. "Force Majeure" events are listed in the agreement, releasing HC&S from their obligation to provide the agreed-upon amount of power to MECO if events beyond their control prevent them from

delivering energy (Alexander and Baldwin [A&B] Hawaii and Maui Electric Company, Limited, 1989). Therefore, an order to reduce ditch flow may release HC&S and MECO from this agreement, thereby reducing the amount of power that MECO can provide to its customers.

### **10.0** Maintenance of Water Quality

The maintenance of water quality is important due to its direct impact upon the maintenance of other instream uses such as fish and wildlife habitat, outdoor recreation, ecosystems, aesthetics, and traditional and customary Hawaiian rights. There are several factors that affect a stream's water quality, including physical, chemical, and biological attributes. The State of Hawaii Department of Health (DOH) is responsible for water quality management duties statewide. The DOH Environmental Health Administration oversees the collection, assessment, and reporting of numerous water quality parameters in three high-priority categories:

- Possible presence of water-borne human pathogens;
- Long-term physical, chemical and biological components of inland, coastal, and oceanic waters; and
- Watershed use-attainment assessments, identification of sources of contamination, allocation of those contributing sources, and implementation of pollution control actions.

The Environmental Health Administration is also responsible for regulating discharges into State waters, through permits and enforcement actions. Examples include federal National Pollutant Discharge Elimination System (NPDES) permits for storm water, and discharge of treated effluent from wastewater treatment plants into the ocean or injection wells.

Sediment and temperature are among the primary physical constituents of water quality evaluations. They are directly impacted by the amount of water in a stream. The reduction of streamflow often results in increased water temperatures, whereas higher flows can aid in quickly diluting stream contamination events. According to a book published by the Instream Flow Council, "[w]ater temperature is one of the most important environmental factors in flowing water, affecting all forms of aquatic life (Amear et al, 2004)." While this statement is true for continental rivers, fish in Hawaii are similar, but their main requirement is flowing water. Surface water temperatures may fluctuate in response to seasonal and diurnal variations, but only a few degrees Celsius in natural streams, mainly because streams in Hawaii are so short. However, temperatures in streams with concrete-lined channels, and dewatered streams, may fluctuate widely due to the vertical solar contact. Surface water temperatures may also fluctuate widely due to water column depth, channel substrate, presence of riparian vegetation, and ground water influx. Surface water also differs considerably from ground water, generally exhibiting lower concentrations of total dissolved solids, chlorides, and other major ions, along with higher concentrations of suspended solids, turbidity, microorganisms, and organic forms of nutrients (Lau and Mink, 2006). Findings of a 2004 USGS National Water Quality Assessment (NAWQA) Program report identified land use, storm-related runoff, and ground water inflow as major contributors of surface water contaminants (Anthony, S.S. et al., 2004).

Water body types can be freshwater, marine, or brackish. They can be further delineated as inland fresh waters, estuaries, embayments, open coastal waters, and oceanic waters (HAR 11-54-5 to 11-54-6). Each water body type has its own numeric criteria for State of Hawaii Water Quality Standards (WQS).

Fresh waters are classified for regulatory purposes, according to the adjacent land's conservation zoning. There are two classes for the inland fresh waters. Class 1 inland waters are protected to "remain in their natural state as nearly as possible with an absolute minimum of pollution from any human-caused source." These waters are used for a number of purposes including domestic water supply, protection of native breeding stock, and baseline references from which human-caused changes can be measured.

Class 2 inland waters are protected for uses such as recreational purposes, support of aquatic life, and agricultural water supplies.

Class 1 waters are further separated into Classes 1a and 1b. Class 1a waters are protected for the following uses: scientific and educational purposes, protection of native breeding stock, baseline references from which human-caused changes can be measured, compatible recreation, aesthetic enjoyment, and other non-degrading uses which are compatible with the protection of the ecosystems associated with waters of this class. Streams that run through natural reserves, preserves, sanctuaries, refuges, national and state parks, and state or federal fish and wildlife refuges are Class 1a. Streams adjacent to the most environmentally sensitive conservation subzone, "protective" are Class 1b, and are protected for the same uses as Class 1a waters, with the addition of domestic water supplies, food processing, and the support and propagation of aquatic life (HAR 11-54-3). These classifications are used for regulatory purposes, restricting what is permitted on the land around receiving waters. For example, public access to Class 1b waters may be restricted to protect drinking water supplies.

Land use affects water quality because direct runoff (rainfall that flows overland into the stream) can transport sediment and its chemical contaminants into the stream. According to the U.S. Environmental Protection Agency (EPA), "[a] TMDL or Total Maximum Daily Load is a calculation of the maximum amount of a pollutant that a waterbody can receive and still meet water quality standards, and an allocation of that amount to the pollutant's sources. Water quality standards are set by States, Territories, and Tribes. They identify the uses for each waterbody, for example, drinking water supply, contact recreation (swimming), and aquatic life support (fishing as well as ecological health), and the scientific criteria required to support those uses. A TMDL is the sum of the allowable loads of a single pollutant from all contributing point and nonpoint sources. The calculation must include a margin of safety to ensure that the waterbody can be used for the purposes the State has designated. The calculation must also account for seasonal variation in water quality. The Clean Water Act, section 303, establishes the water quality standards and TMDL programs (EPA, 2008)."

The DOH, Environmental Health Administration maintains the State of Hawaii Water Quality Standards (WQS), a requirement under the Federal Clean Water Act (CWA) regulated by the EPA. The CWA aims to keep waters safe for plants and animals to live and people to wade, swim, and fish. Water Quality Standards are the measures that states use to ensure protection of the physical, chemical, and biological health of their waters. "A water quality standard defines the water quality goals of a water body, or portion thereof, by designating the use or uses to be made of the water and by setting criteria necessary to protect the uses (CWA §131.2)." Each state specifies its own water uses to be achieved and protected ("designated uses"), but CWA §131.10 specifically protects "existing uses", which it defines as "...those uses actually attained in the water body on or after November 28, 1975, whether or not they are included in the water quality standards (CWA §131.3)."<sup>13</sup> Although the State WQS do not specify any designated uses in terms of traditional and customary Hawaiian rights, the "protection of native breeding stock," "aesthetic enjoyment," and "compatible recreation" are among the designated uses of Class 1 inland

<sup>&</sup>lt;sup>13</sup> Existing uses as defined in the CWA should not be confused with existing uses as defined in the State Water Code, although there is some overlap and linkage between the two. Under the Water Code, if there are serious threats to or disputes over water resources, the Commission may designate a "water management area." Water quality impairments, including threats to CWA existing uses, are factors that the Commission may consider in its designation decisions. Once such a management area is designated, people who are already diverting water at the time of designation may apply for water use permits for their "existing uses." The Commission then must weigh if the existing use is "reasonable and beneficial." The Water Code defines "reasonable-beneficial use" as "the use of water in such a quantity as is necessary for economic and efficient utilization, for a purpose, and in a manner which is both reasonable and consistent with the state and county land use plans and the public interest." The relationships between a Commission existing use and a CWA existing use can help determine the appropriateness of the use and its consistency with the public interest.

waters, and "recreational purposes, the support and propagation of aquatic life, and agricultural and industrial water supplies" are among the designated uses of Class 2 inland waters. This means that uses tied to the exercise of traditional and customary Hawaiian rights that are protected by the State Constitution and the State Water Code (Section 12.0, Protection of Traditional and Customary Hawaiian Rights), including but not limited to gathering, recreation, healing, and religious practices are also protected under the CWA and the WQS as designated and/or existing uses. Therefore, the Commission's interim IFS recommendation may impact the attainment of designated and existing uses, water quality criteria, and the DOH antidegradation policy, which together define the WQS and are part of the joint Commission and DOH obligation to assure sufficient water quality for instream and noninstream uses.

State of Hawaii WQS define: 1) the classification system for State surface waters, which assigns different protected uses to different water classes; 2) the specific numeric or narrative water quality criteria needed to protect that use; and 3) a general antidegradation policy, which maintains and protects water quality for the uses defined for a class. Quantitative and qualitative data are utilized. Numeric water quality criteria have specific concentrations (levels of pollutants) that must be attained based on water body type, e.g. fresh water stream. Qualitative standards are general narrative statements that are applicable to all State waters, such as "all waters shall be free of substances attributable to domestic, industrial, or other controllable sources of pollutants (State of Hawaii, Department of Health, 2004)." Conventional pollutants include nutrients and sediments. Toxic pollutants include pesticides and heavy metals. Indicator bacteria are utilized to assess bacterial levels. Biological assessments of aquatic communities are also included in the data collected.

Once data are gathered and evaluated for quality and deemed to be representative of the waterbody segment, a decision is made as to whether the appropriate designated uses are being attained. This set of decisions are then tabulated into a report to the EPA that integrates two CWA sections; (§) 305(b) and §303(d). This Integrated Report is federally required every even-numbered year. CWA §305(b) requires states to describe the overall water quality statewide. They must also describe the extent to which water quality provides for the protection and propagation of a balanced population of shellfish, fish, and wildlife and allows recreational activities in and on the water. Additionally, they determine whether the designated uses of a water body segment are being attained, and if not, what are the potential causes and sources of pollution. The CWA §303(d) requires states to submit a list of Water-Quality Limited Segments, which are waters that do not meet state water quality standards and those waters' associated uses. States must also provide a priority ranking of waters listed for implementation of pollution controls, which are prioritized based on the severity of pollution and the uses of the waters. In sum, the §303(d) list leads to action.

The sources for the 2006 Integrated Report are Hawaii's 2004 §303(d) list, plus readily-available data collected from any State water bodies over the preceding 6 years (State of Hawaii, Department of Health, 2007). Per §303(d), impaired waters are listed after review of "all existing and readily available water quality-related data and information' from a broad set of data sources" (State of Hawaii, Department of Health, 2004, p.57). However, available data are not comprehensive of all the streams in the State. According to the Hawaii Administrative Rules Title 11 Chapter 54 (HAR 11-54) all State waters are subject to monitoring; however, in the most recent list published (from the 2006 list that was published in 2007), only 74 streams statewide had sufficient data for evaluation of whether exceedence of WQS occurred. Puohokamoa Stream appears on the 2006 List of Impaired Waters in Hawaii, Clean Water Act §303(d). While some data exist for Puohokamoa, there were not sufficient data for decision-making; therefore, no decision was made pertaining to the attainment of WQS or the applicable designated uses.

The 2006 Integrated Report indicates that the current WQS require the use of *Enterococci* as the indicator bacteria for evaluating public health risks in the waters of the State; however, no new data were available for this parameter in inland waters. As mentioned in Section 5.0, Outdoor Recreational Activities, DOH


maintains WQS for inland recreational waters based on the geo-mean statistic of *Enterococci*: 33 colonyforming units per 100 mL of water or a single-sample maximum of 89 colonies per 100 mL. This is for full-body contact (swimming, jumping off cliffs into waterfall pools, etc.). If *Enterococci* count exceeds those values, the water body is considered to be impaired. DOH Clean Water Branch efforts have been focused on coastal areas (State of Hawaii, Department of Health, 2006, Chapter II, p.20). The marine recreational zone, which extends from the shoreline seaward to 1,000 feet from shore, requires an *Enterococci* geo-mean of less than 7 colony-forming units per 100 mL of water to protect human health (HAR 11-54-8).

The 2006 Integrated Report also states: "Public health concerns may be underreported. *Leptospirosis* is not included as a specific water quality standard parameter. However, all fresh waters within the state are considered potential sources of *Leptospirosis* infection by the epidemiology section of the Hawaii State Department of Health. No direct tests have been approved or utilized to ascertain the extent of the public health threat through water sampling. Epidemiologic evidence has linked several illness outbreaks to contact with fresh water, leading authorities to issue blanket advisories for all fresh waters of the state (State of Hawaii, Department of Health, 2006, Chapter II, p.3)."

Puohokamoa Stream is classified as Class 1b inland waters from its headwaters to approximately 1,200 feet elevation, as the surrounding land is in the conservation subzone "protective." From there down to about 700 feet elevation, Puohokamoa Stream is classified as Class 1a inland waters because the stream lies in the Koolau Forest Reserve. From there to the sea, it is classified as Class 2 inland waters. It should be noted that the conservation subzone map utilized for this interpretation is general and elevations are not exact. It should also be noted that there is no direct relationship between elevation and attainment of water quality standards.

Marine water body types are delineated by depth and coastal topography. Open coastal waters are classified for protection purposes from the shoreline at mean sea level laterally to where the depth reaches 100 fathoms (600 feet). Marine water classifications are based on marine conservation areas. The objective of Class AA waters is that they "remain in their natural pristine state as nearly as possible with an absolute minimum of pollution or alteration of water quality from any human-caused source or actions." Class A waters are protected for recreational purposes and aesthetic enjoyment; and protection of fish, shellfish, and wildlife. Discharge into these waters is permitted under regulation. The marine waters at the mouth of the Puohokamoa hydrologic unit are Class AA waters. Figure 10-1 shows the Puohokamoa hydrologic unit, including inland and marine (coastal) water classifications.

Figure 10-1. Water quality standards for the Puohokamoa hydrologic unit. (Source: State of Hawaii, Office of Planning, 2002e; 2008). The classifications are general in nature and should be used in conjunction with Hawaii Administrative Rules, Chapter 11-54, Water Quality Standards.

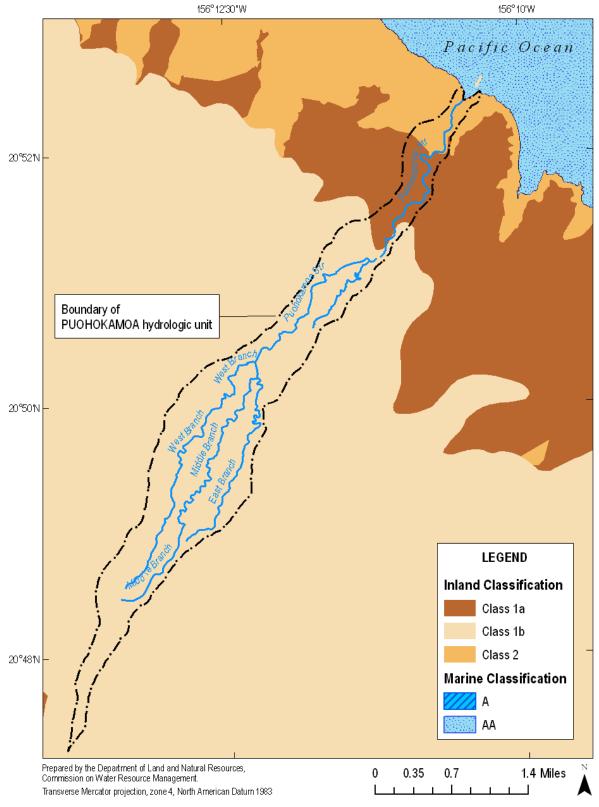

# **11.0** Conveyance of Irrigation and Domestic Water Supplies

Under the State Water Code, the conveyance of irrigation and domestic water supplies to downstream points of diversion is included as one of nine listed instream uses. The thought of the stream as a conveyance mechanism for noninstream purposes almost seems contrary to the concept of instream flow standards. However, the inclusion of this instream use is intended to ensure the availability of water to all those who may have a legally protected right to the water flowing in a stream. Of particular importance in this section is the diversion of surface water for domestic purposes. In its August 2000 decision on the Waiahole Ditch Combined Contested Case Hearing, the Hawaii Supreme Court identified domestic water use of the general public, particularly drinking water, as one of, ultimately, four trust purposes.

Neither the State nor the County keeps a comprehensive database of households whose domestic water supply is not part of a municipal system (i.e. who use stream and / or catchment water). The County of Maui Department of Water Supply (DWS) does not have data for water users who are not on the county system and may be using catchment or surface water for domestic use (Ellen Kraftsow, personal communication, June 23, 2008). The State of Hawaii Department of Health Safe Drinking Water Branch administers Federal and State safe drinking water regulations to public water systems in the State of Hawaii to assure that the water served by these systems meets State and Federal standards. Any system which services 25 or more people for a minimum of 60 days per year or has at least 15 service connections is subject to these standards and regulations. Once a system is regulated by the Safe Drinking Water Branch, the water must undergo an approved filtration and disinfection process when it has been removed from the stream. It would also be subject to regulatory monitoring. The DOH Safe Drinking Water Branch does not currently regulate any public water systems in the Waikamoi hydrologic unit.

The Commission's records for the hydrologic unit of Puohokamoa indicate that there are a total of eight registered diversions, of which four are East Maui Irrigation Company (EMI) diversions and four were registered by both EMI and Maui DWS (Upper and Lower Kula Systems). Since EMI and Maui DWS diversions transport water to locations outside of this hydrologic unit, the information is not discussed in this section; rather, it is included in Section 13.0, Noninstream Uses. No diversions divert water for domestic or irrigation purposes.

More information on the diversions for the Puohokmaoa hydrologic unit may be found in Tables 13-1 and 13-2 of Section 13.0, Noninstream Uses.

## 12.0 Protection of Traditional and Customary Hawaiian Rights

The maintenance of instream flows is important to the protection of traditional and customary Hawaiian rights, as they relate to the maintenance of stream resources (e.g., hihiwai, opae, oopu) for gathering, recreation, and the cultivation of taro. Article XII, Section 7 of the State Constitution addresses traditional and customary rights: "The State reaffirms and shall protect all rights, customarily and traditionally exercised for subsistence, cultural and religious purposes and possessed by ahupua'a tenants who are descendants of native Hawaiians who inhabited the Hawaiian Islands prior to 1778, subject to the right of the State to regulate such rights." Case notes listed in this section indicate, "Native Hawaiian rights protected by this section may extend beyond the ahupua'a in which a native Hawaiian resides where such rights have been customarily and traditionally exercised in this manner. 73 H.578, 837 P.2d 1247."

It is difficult to fully represent in words the depth of the cultural aspects of streamflow, including traditions handed down through the generations regarding gathering, ceremonial and religious rites, and the ties to water that are pronounced in Hawaiian legend and lore. "There is a great traditional significance of water in Hawaiian beliefs and cultural practices...The flow of water from mountain to sea is integral to the health of the land. A healthy land makes for healthy people, and healthy people have the ability to sustain themselves (Kumu Pono Associates, 2001b, p.II:8)."

Taro cultivation is addressed in this section of the report as well as the next section, 13.0 Noninstream Uses. This is because instream flow standards take into account both social and scientific information. For sociological and cultural purposes, taro cultivation can be considered an instream use as part of the "protection of traditional and customary Hawaiian rights," that is specifically listed as an instream use in the Water Code. Taro cultivation can also be considered a noninstream use since it removes water from a stream (even if water from taro loi is later returned to the stream). It could be argued that for scientific analysis, taro cultivation is an instream use since taro loi provide habitat for stream biota, but because the water is physically taken out of the stream, it is also a noninstream use. Another way to look at the approach of indentifying taro cultivation as an instream use, it is generally in the context of traditional and customary Hawaiian rights; whereas when the Commission addresses taro cultivation as an instream use, it is approaching the issue from the aspects of agriculture and water use.

In ancient Hawaii, the islands (*moku*) were subdivided into political subdivisions, or ahupuaa, for the purposes of taxation. The term ahupuaa in fact comes from the altar (*ahu*) that marked the seaward boundary of each subdivision upon which a wooden head of a pig (*puaa*) was placed at the time of the *Makahiki* festival when harvest offerings were collected for the rain god and his earthly representative (Handy et al., 1972). Each ahupuaa had fixed boundaries that were usually delineated by natural features of the land, such as mountain ridges, and typically ran like a wedge from the mountains to the ocean thus providing its inhabitants with access to all the natural resources necessary for sustenance. The beach, with its fishing rights, were referred to as *ipu kai* (meat bowl), while the upland areas for cultivation were called *umeke ai* (poi container hung in a net) (Handy et al., 1972). As noted earlier in Section 6.0, Maintenance of Ecosystems, Western concepts of ecosystem maintenance and watersheds are similar to the Hawaiian concept of ahupuaa, and so the Commission's surface water hydrologic units often coincide with or overlap ahupuaa boundaries. The hydrologic unit of Puohokamoa includes parts of the ahupuaa of East Makaiwa, Honomanu, Haiku Uka, and Kalialinui as shown in Figure 12-2.

An appurtenant water right is a legally recognized right to a specific amount of surface freshwater – usually from a stream – on the specific property that has that right. This right traces back to the use of water on a given parcel of land at the time of its original conversion into fee simple lands: When the land

allotted during the 1848 Mahele was confirmed to the awardee by the Land Commission and/or when the Royal Patent was issued based on such award, the conveyance of the parcel of land carried with it the appurtenant right to water if water was being used on that land at or shortly before the time of the Mahele (State of Hawaii, Commission on Water Resource Management, 2007).

An appurtenant right is different from a riparian right, but they are not mutually exclusive. Riparian rights are held by owners of land adjacent to a stream. They and other riparian landowners have the right to reasonable use of the stream's waters on those lands. Unlike riparian lands, the lands to which appurtenant rights attach are not necessarily adjacent to the freshwater source (i.e., the water may be carried to the lands via auwai or ditches), but some pieces of land could have both appurtenant and riparian rights.

Appurtenant rights are provided for under the State Water Code, HRS §174C-101, Sections (c) and (d), as follows:

- Section (c). Traditional and customary rights of ahupuaa tenants who are descendants of native Hawaiians who inhabited the Hawaiian Islands prior to 1778 shall not be abridged or denied by this chapter. Such traditional and customary rights shall include, but not be limited to, the cultivation or propagation of taro on one's own kuleana and the gathering of hihiwai, opae, oopu, limu, thatch, ti leaf, aho cord, and medicinal plants for subsistence, cultural, and religious purposes.
- Section (d). The appurtenant water rights of kuleana and taro lands, along with those traditional and customary rights assured by this section, shall not be diminished or extinguished by a failure to apply for or to receive a permit under this chapter.

The exercise of an appurtenant water right is still subject to the water use permit requirements of the Water Code, but there is no deadline to exercise that right without losing it, as is the case for correlative and riparian rights, which must have been exercised before designation of a water management area.

In August 2000, the Hawaii Supreme Court issued its decision in the Waiahole Ditch Combined Contested Case Hearing, upholding the exercise of Native Hawaiian and traditional and customary rights as a public trust purpose. These rights are described in the Commission's 2008 Water Resource Protection Plan – *Public Review Draft* as follows:

Appurtenant water rights are rights to the use of water utilized by parcels of land at the time of their original conversion into fee simple lands i.e., when land allotted by the 1848 Mahele was confirmed to the awardee by the Land Commission and/or when the Royal Patent was issued based on such award, the conveyance of the parcel of land carried with it the appurtenant right to water.<sup>14</sup> The amount of water under an appurtenant right is the amount that was being used at the time of the Land Commission award and is established by cultivation methods that approximate the methods utilized at the time of the Mahele, for example, growing wetland taro.<sup>15</sup> Once established, future uses are not limited to the cultivation of traditional products approximating those utilized at the time of the Mahele<sup>16</sup>, as long as those uses are reasonable, and if in a water management area, meets the State Water Code's test of reasonable and beneficial use ("the use of water in such a quantity as is necessary for economic and efficient utilization, for a purpose, and in a manner which is both reasonable and consistent with the State and county land use plans and

<sup>&</sup>lt;sup>14</sup> 54 Haw. 174, at 188; 504 .2d 1330, at 1339.


<sup>&</sup>lt;sup>15</sup> 65 Haw. 531, at 554; 656 P.2d 57, at 72.

<sup>&</sup>lt;sup>16</sup> *Peck v Bailey*, 8 Haw. 658, at 665 (1867).

the public interest"). As mentioned earlier, appurtenant rights are preserved under the State Water Code, so even in designated water management areas, an unexercised appurtenant right is not extinguished and must be issued a water use permit when applied for, as long as the water use permit requirements are met [Figure 12-1].

The Hawaii Legislative Session of 2002 clarified that the Commission is empowered to "determine appurtenant rights, including quantification of the amount of water entitled to by that right," (HRS §174C-5(15)). In those cases where a Commission decision may affect an appurtenant right, it is the claimant's duty to assert the appurtenant right and to gather the information required by the Commission to rule on the claim. The Commission is currently in the process of developing a procedural manual to aid in the understanding and assembling of information to substantiate an appurtenant rights claim.

Figure 12-1. Generalized process for determining appurtenant water rights. This process is generalized and may not fully explain all possible situations. It does not apply to Hawaiian Homes Lands. If you are Native Hawaiian you may have other water rights.

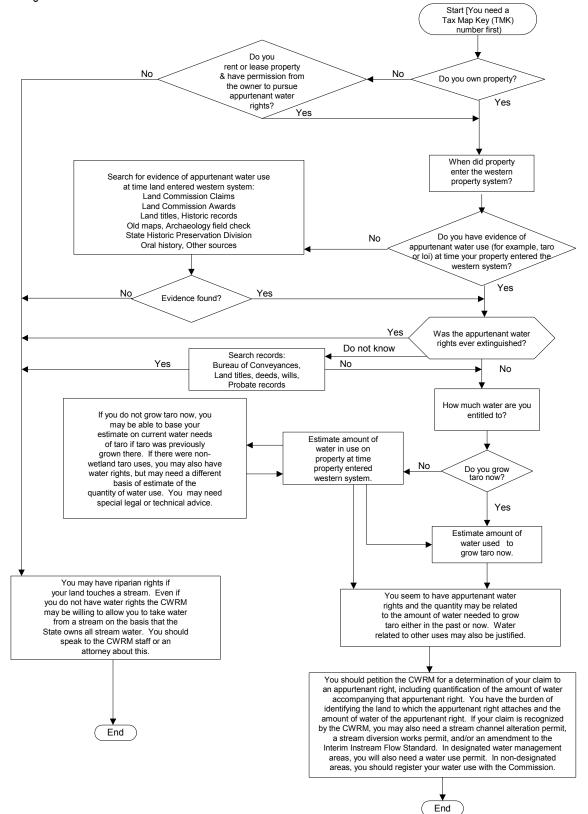

The Commission conducted a cursory assessment of tax map key parcels to identify their associated Land Commission Awards, in an attempt to identify the potential for future appurtenant rights claims within the hydrologic unit of Puohokamoa. In addition to the original reference documents, a 2001 inventory conducted by Kumu Pono Associates, under contract by East Maui Irrigation Company, serves as a valuable reference of historical accounts of the lands of Hamakua Poko, Hamakua Loa and Koolau, Maui Hikina (east Maui). Table 12-1 presents the results of the Commission's assessment.

Table 12-1. Tax map key parcels with associated Land Commission Awards for the Puohokamoa hydrologic unit.

ТМК	Landowner	LCA	Grants/Leases	Notes
(2)1-1-001:022	East Maui Irrigation Co. Ltd. /Etal	none	Gr. 2916	
(2)1-1-001:044	State of Hawaii /Etal	none	G.L. S-3695	
(2)1-1-001:050	State of Hawaii /Etal	none	G.L. L-3578 (por.) G.L. L-2656 (por.)	
(2)1-1-001:052	State of Hawaii	none	G.L. S-4230	
(2)2-3-005:004	Haleakala Ranch Co.	7124 5230	none	
(2)2-4-016:004	East Maui Irrigation Co. Ltd. /Etal	none	Grant 182	

[LCA is Land Commission Award; Gr. is Grant; and G.L. is Government Lease.]

In accordance with the State Water Code and the Supreme Court's decision in the Waiahole Ditch Combined Contested Case Hearing, the Commission is focused on the assertion and exercise of appurtenant rights as it largely relates to the cultivation of taro. Wetland kalo or taro (*Colocasia esculenta* (L.) Schott) is an integral part of Hawaiian culture and agricultural tradition. The preferred method of wetland taro cultivation, where terrain and access to water permitted, was the construction of loi (flooded terraces) and loi complexes. These terraces traditionally received stream water via carefully engineered open channels called auwai. The auwai carried water, sometimes great distances, from the stream to the loi via gravity flow. In a system of multiple loi, water may either be fed to individual loi through separate little ditches if possible, or in the case of steeper slopes, water would overflow and drain from one loi to the next. Outflow from the loi may eventually be returned to the stream.

The loi also served other needs including the farming of subsidiary crops such as banana, sugar cane, and ti plants that were planted on its banks, and the raising of fish such as oopu, awa, and aholehole within the waters of the loi itself. At least 85 varieties of taro were collected in 1931, each of which varied in color, locale, and growing conditions. The water needs of taro under wet conditions depend upon: 1) climate; 2) location and season (weather); 3) evaporation rate; 4) soil type; 5) ground water hydrology; 5) water temperature; and 6) agronomic conditions (crop stage; planting density and arrangement; taro variety; soil amendment and fertilization regime; loi drainage scheme; irrigation system management; and weed, pest, and disease prevalence and management).

Among its comments during the preparation of previous IFSARs for east Maui, Native Hawaiian Legal Corporation (NHLC) submitted testimony from 2001 relating to taro cultivation and gathering practices in east Maui streams. The pre-printed forms were completed by several east Maui residents. The information relating to taro cultivation is presented in Table 12-2 (See PR-2008-07). No testimony specifically identifies the hydrologic unit of Puohokamoa.

Declarant (CPRC Reference)	Str Stream Adjacent To Property W		Stream Source For Auwai Adjacent To Property	Stream Source For Auwai Adjacent To Property Where Kalo Is Grown	Streams Where Kalo Would Be Grown If Water Were Available	
Charles L. Barclay (CPRC 29.2-3)	Wailuanui	Lakini	Lakini	Kualani, Waiokamilo (Kamilo)	Makapipi	
	Problem Statemen "No constant water our patches at Wai	flow. Also because	of lack of water flow	v at Lakini we are una	ble to open all of	
Awapuhi Carmichael (CPRC 29.2-55)						
Daniel Carmichael (CPRC 29.2-33)						
Puanani Holokai (CPRC 29.2-17)	(lease) Piinaau & Palahulu	(lease) Piinaau & Palahulu	(lease) Piinaau & Palahulu	(lease) Piinaau & Palahulu		
Cindy Ku'uipo Ka'auamo (CPRC 29.2-21)	Waiokamilo			Waiokamilo, Kulani, Wailuanui, Palauhulu, Piinaau		
Darlene Kaauamo (CPRC 29.2-19)	Waiokamilo			Waiokamilo, Kulani, Wailuanui, Palauhulu, Piinaau		
Frances Kaauamo (CPRC 29.2-45)			Waikani			
Hannah K. Kaauamo (CPRC 29.2-27)	Ka'amilo (Wai O'Ka Milo)	La'Kine, Wai O'Ka Milo, Kulani	Wai'Lua'Nui, Wai'O'Kamilo	La'Kine, Wai'Lua'Nui, Kulani, Wai Kani, Wai O'Ka Milo,	Wai'Lua'Nui	
	lot diseases destroy	gh water flowing thro ying our taro - We ha		hat is one of the reaso rain to get more water ugh flow)."		
Leolani R. Kaauamo (CPRC 29.2-41)	Ka'a Hiio (?)	Laikaine-moii (?, illegible)	Wailuanui, Waiokamoii	Wailuanui, Waiokamoii, Lakai, Waiokani	Wailuanui	
		icted by the State of	HI but insufficient we on a continuous flor	vater to feed way wate	er has diminished	
Mary Kaauamo (CPRC 29.2-43)			Wailuanui and Waiokamilo	Wailuanui and Waiokamilo		
Samuel E. Kaauamo (CPRC 29.2-25)	Lakini, Kaamilo	Lakini, Kaamilo	Lakini, Kaamilo	Lakini, Kaamilo	Lakin, Kamilo	

Table 12-2. Summary of the 2001 testimonies submitted by NHLC related to taro cultivation.

Table 12-2. Continued. S	Summary of the 2001	testimonies submitte	ed by NHLC related t	to taro cultivation.	
Declarant (CPRC Reference)	Stream Adjacent To Property	Stream Adjacent To Property Where Kalo Is Grown	Stream Source For Auwai Adjacent To Property	Stream Source For Auwai Adjacent To Property Where Kalo Is Grown	Streams Where Kalo Would Be Grown If Water Were Available
Solomon Kaauamo Jr. (CPRC 29.2-29)	Kaamilo (Waiokamilo)	Lakini, Kulani, Waiokamilo, Wailuanui	Wailuanui, Waiokamilo	Wailuanui, Waiokamilo, Lakini, Kulani	Wailuanui
				ient water to feed wat continuous flow."	er way. Water has
Gladys Kanoa (CPRC 29.2-31)	Waiokamilo, Piinaau, Palauhulu, Kulani	Waiokamilo, Piinaau, Palauhulu, Kulani	Waiokamilo, Piinaau, Palauhulu, Kulani	Lakini, Makilo, Waiokamilo, Palauhulu, Kualani	
Jerome Kekiwi, Jr. (CPRC 29.2-49)	Lakini, Kulani, Kamilo	Wai O Kamilo, Lakini, Kulani	Wai O Kamilo, Lakini, Kulani		Waikau, Wailua
	Problem Statemen "The water is unab patch."		because there is no ac	ccess or irrigation to g	o to the kalo
Puaala Kekiwi (CPRC 29.2-47)			(lease) Kulani, Waiokamilo	Kulani, Waiokamilo	
Chauncey K. Kimokeo (CPRC 29.2-5)			Palahulu	Keanae Flume	
Ihe Kimokeo (CPRC 29.2-11)			Palahulu	Keanae Flume	
Lincoln A. Kimokeo (CPRC 29.2-9)			Palahulu	Palahulu	Kolea to Makapipi
	production is minir	ater pressure water is nal and could be of h utilizing all of the re	nigher quality. This	furthest from flume ca prevents all kalo farm Ia'a and making highe	ers & residents of
Pualani Kimokeo (CPRC 29.2-7)			Palahulu	Palahulu	Any property next to me
	Problem Statemen "We need constant have a better growt	flowing water at all	times. Patches next the end cause the wa	to the flume catch is 1 ater pressure gets sma	nore likely to ller and warmer."
Willie K. Kimokeo (CPRC 29.2-13)	Palahulu	Keanae Flume	Keanae Flume	Keanae Flume	
Norman D. Martin Jr. (CPRC 29.2-15)	Waikane, Kulani, Waiokamilo	Waikane, Kulani, Waiokamilo	Waikane, Kulani, Waiokamilo	Waikane, Kulani, Waiokamilo	Waikane
	Problem Statemen "Lack of water."	<u>nt (Kalo):</u>			

Table 12-2. Continued. Summary of the 2001 testimonies submitted by NHLC related to taro cultivation.

Declarant (CPRC Reference)	Declarant Stream Adjacent		Stream AdjacentStream SourceTo PropertyFor AuwaiWhere Kalo IsAdjacentGrownTo Property		Streams Where Kalo Would Be Grown If Water Were Available
B. Tau-a M. Pahukoa (CPRC 29.2-51)			Palauhulu, Waiakamilo, Waiakamilo & Palauhulu, Piinaua But Piinaua & also [illegible] water Waipio from flume that comes from Palauhulu also.		Waipio
	Problem Statemen "There is lack of w	nt (Kalo): rater to even push (?)	the stream."		
Benjamin Smith Sr. (CPRC 29.2-37)	Wailua Nui		Wailua Nui, Ka Milo		
				985 our streams are d te."	ry. We need more
Lucille L. Smith (CPRC 29.2-39)	Wailua Nui		Wailua Nui, Kamilo		
Edward Wendt (CPRC 29.2-53)	Lakini and Waiokamilo, Kulani	Lakini and Waiokamilo, Kulani	Lakini, Kulani, Waiokamilo	Lakini, Kulani, Waiokamilo	

Table 12-2. Continued. Summary of the 2001 testimonies submitted by NHLC related to taro cultivation.

In 2002, the State Office of Hawaiian Affairs cosponsored a "No Ka Lo'i Conference", in the hopes of bringing together taro farmers from around the state to share knowledge on the cultivation of taro. An outcome of the conference was an acknowledgement that farmers needed to better understand the water requirements of their taro crops to ensure and protect their water resource interests. The result of this effort was a 2007 USGS wetland kalo water use study, prepared in cooperation with the State Office of Hawaiian Affairs, which specifically examined flow and water temperature data in a total of 10 cultivation areas on four islands in Hawaii. Two of the loi (flooded terrace) complexes are located in east Maui (Wailua and Keanae).

The study reiterated the importance of water temperature in preventing root rot. Typically, the water in the taro loi is warmer than water in the stream because of solar heating. Consequently, a taro loi needs continuous flow of water to maintain the water temperature at an optimum level. Multiple studies cited in Gingerich, et al., 2007, suggest that water temperature should not exceed 77°F (25°C). Low water temperatures slow taro growth, while high temperatures may result in root rot (Penn, 1997). When the flow of water in the stream is low, possibly as a result of diversions or losing reaches, the warmer water in the taro loi is not replaced with the cooler water from the stream at a quick enough rate to maintain a constant water temperature. As a result, the temperature of the water in the taro loi rises, triggering root rot.

The USGS 2007 study noted that "although irrigation flows for kalo cultivation have been measured with varying degrees of scientific accuracy, there is disagreement regarding the amount of water used and needed for successful kalo cultivation, with water temperature recognized as a critical factor. Most studies have focused on the amount of water consumed rather than the amount needed to flow through the irrigation system for successful kalo cultivation (Gingerich, et al., 2007)." As a result, the study was designed to measure the throughflow of water in commercially viable loi complexes, rather than measuring the consumption of water during taro growth.

Because water requirements for taro vary with the stage of maturity of the plants, all the cultivation areas selected for the study were at approximately the same stage (i.e. near harvesting, when continuous flooding is required). Temperature measurements were made every 15 minutes for approximately 2 months. Flow measurements were collected at the beginning and the end of that period. Data were collected during the dry season (June – October), when water requirements for cooling kalo are higher. Surface water temperatures generally begin to rise in April and remain elevated through September, due to increased solar heating. Water inflow temperature was measured in 17 loi complexes, and only three had inflow temperatures rising above 27°C (the threshold temperature above which wetland kalo is more susceptible to fungi and associated rotting diseases).

The average and median inflows from all 10 cultivation areas studied are listed in Table 12-3. The study indicated that the "values are consistent with previously reported inflow and are significantly higher than values generally estimated for consumption during kalo cultivation." It should also be noted that farmers were interviewed during field visits; most "believed that their supply of irrigation water was insufficient for proper kalo cultivation."

Table 12-3. Summary of water use calculated from loi and loi complexes by island, State of Hawaii (Source: Gingerich et al., 2007, Table 10).

Jaa ganono por do		Con	nplex			1	oi	
Island	Number	Average water use (gad)	Average windward water use (gad)	Average leeward water use (gad)	Number	Average water use (gad)	Average windward water use (gad)	Average leeward water use (gad)
Kauai	6	120,000	97,000	260,000	2	220,000	220,000	na
Oahu	5	310,000	380,000	44,000	4	400,000	460,000	210,000
Maui	6	230,000	230,000	na	na	na	na	na
Hawaii	2	710,000	710,000	na	na	na	na	na
Average of all measurements		260,000	270,000	150,000		350,000	370,000	210,000
Median of all measurements		150,000	150,000	150,000		270,000	320,000	210,000

[gad = gallons per acre per day; na = not available]

The windward Maui areas chosen for the study were Waihee, Wailua, and Keanae. Wailua and Keanae each have numerous individual loi and loi complexes. Three of the Wailua area complexes were available for study: 1) Lakini complex, supplied through an auwai with water diverted from Hamau Stream, which in turn receives diverted water from Waiokamilo Stream; 2) Wailua complex, supplied through an auwai with water diverted from Waiokamilo Stream; and 3) Waikani complex, supplied through an auwai with water diverted from Waiokamilo Stream. The loi in Keanae were treated as a single complex supplied by the Keanae Flume, which diverts water from Palauhulu Stream.

The study results are presented below in Table 12-4 (discharge measurements) and Table 12-5 (water-temperature statistics).

Table 12-4. Summary of discharge measurements and areas for selected loi complexes, Island of Maui (Source: Gingerich et al., 2007, Table 6).

[mgd = million gallons per day; gad = gallons per acre per day; na = not applicable; average water use is determined by summing the average	S
of each complex or loi and dividing by the number of complexes or loi.]	

Area				Com	plex		
	Station	Irrigation area (acre)	Date	Measurement time	Discharge (mgd)	Water use (gad)	Remarks
Waihee	Ma08A-CI	2.3	7/29/2006	1501	0.34	150,000	total flow for upper and lower complexes
			9/22/2006	1158	0.30	130,000	total flow for upper and lower complexes
	Ma08B-CIR	na	7/29/2006	1500	0.025		*
	Ma08B-CIL	na			0.06		
		0.76		na	0.085	110,000	combined right and left complex inflows
	Ma08B-CIR	na	9/22/2006	1150	0.058		
	Ma08B-CIL	na		1055	0.067		
		0.76		na	0.13	160,000	combined right and left complex inflows
Wailua (Lakini)	Ma09-CIR	na	7/30/2006	1004	0.26		
	Ma09-CIL	na		947	0.30		
		0.74		na	0.56	750,000	combined right and left complex inflows
	Ma09-CIR	na	9/21/2006	1015	0.16		
	Ma09-CIL	na		1049	0.06		
	Ma09-CIM	na		1206	0.19		
		0.74		na	0.41	550,000	combined right, left, and middle complex inflows
Wailua	Ma10-CI	3.32	7/30/2006	1136	0.59	180,000	
			9/21/2006	845	0.46	140,000	
Wailua (Waikani)	Ma11-CI	2.80	7/30/2006	1236	0.54	190,000	
			9/21/2006	1608	0.26	93,000	
Keanae	Ma12-CI	10.53	7/31/2006	836	1.90	180,000	former USGS streamflow-gaging station
			9/21/2006	1415	1.60	150,000	
number		6.00				6	
minimum		0.74				93,000	
maximum		10.53				750,000	
average		3.41				230,000	

Table 12-5. Water-temperature statistics based on measurements collected at 15-minute intervals for loi complexes on the Island of Maui (Source: Gingerich et al., 2007, Table 7).

					Temperature (°C)		
Geographic designation	Area	Station	Period of record	Mean	Range	Mean daily range	Temperature measurements greater that 27°C (percent)
Windward	Waihee	Ma08A-CI	7/29/2006 - 9/22/2006	21.6	19.9 - 24.0	2.0	0.0
		Ma08B-CIL	7/29/2006 - 9/22/2006	24.9	20.3 - 34.0	7.6	25.4
		Ma08B-CO	7/29/2006 - 9/22/2006	25.5	20.0 - 35.5	5.7	27.0
Windward	Wailua (Lakini)	Ma09-CIT	7/30/2006 - 9/21/2006	20.7	18.5 - 23.4	2.3	0.0
		Ma09-CO	7/30/2006 - 9/21/2006	23.2	18.4 - 31.7	7.4	16.9
Windward	Wailua	Ma10-CI	7/30/2006 - 9/21/2006	22.5	20.5 - 25.9	1.9	0.0
Windward	Wailua (Waikani)	Ma11-CI	7/30/2006 - 9/21/2006	22.2	21.0 - 24.0	0.7	0.0
		Ma11-CO	7/30/2006 - 9/21/2006	26.1	22.1 - 31.8	3.3	29.1
Windward	Keanae	Ma12-CI	7/31/2006 - 9/21/2006	20.0	19.0 - 21.9	1.0	0.0
		Ma12-CO	equipment malfunction	na	na	na	na

[°C = degrees Celsius; na = not applicable]

The Commission's records for the hydrologic unit of Puohokamoa indicate that there are a total of eight registered diversions, all of which are operated by EMI or Maui DWS. None of the diversions were declared for taro cultivation or other domestic purposes. More information on the registered diversions may be found in Table 13-1 of Section 13.0, Noninstream Uses.

Commission staff held a Public Fact Gathering Meeting on April 10, 2008 in Haiku, Maui to gather comments on previous IFSARs for east Maui. Written comments were also accepted over a 3-month period. A great deal of the oral and written testimony addressed traditional and customary rights, including taro cultivation and gathering practices. Dozens of east Maui residents testified that insufficient water in the streams to cultivate as much taro as desired; and that often the water that does flow is too warm, resulting in root rot.

Further, testimony indicated that there is insufficient native fauna for gathering, and the water is also not sufficient for recreation. Testimony before the Board of Land and Natural Resources from May 2001 was also provided, with six long-time east Maui residents all stating that the streamflow in east Maui has diminished within their lifetimes (See PR-2008-07, 29.3-1 through 29.3-12). Some of the same six residents also provided oral testimony on April 10, 2008 and/or in writing. They, and others, state that the reduction in streamflow has impacted their ability to survive off the land and to perpetuate the Hawaiian culture (See PR-2008-07).

As noted earlier, NHLC submitted comments during the preparation of previous IFSARs for east Maui. The testimony from 2001 consisted of a pre-printed form in which people identified information pertaining to taro cultivation and gathering practices in east Maui streams. The information from these forms, as it relates to gathering, is presented in Table 12-6 (See PR-2008-07, 29.2-1 through 29.2-56). No testimony specifically identifies the hydrologic unit of Puohokamoa.

Declarant (CPRC Reference)	What Is Gathered By The Family	Streams Where Gathering Is Practiced	What Would Be Gathered If Water Were Available	Streams Where Gathering Would Be Practiced If Water Were Available
Charles L. Barclay (CPRC 29.2-3)	opae, hihiwai, o'opu	Honomanu to Makapipi	opae, hihiwai, o'opu	Honomanu, Waiokamilo
	Problem Statement (C "Not enough free-flow		e kalo, opae, hihiwai & o	o'opu."
Awapuhi Carmichael (CPRC 29.2-55)	opae, hi hi wais, oopu	from Honomanu to Makapipi	opai (?)	Palauhulu, West Wailuaiki
	a state, our ahupua'a is	the water we needed to g left with little or no wate need the water for this	er to grow healthy taro a	ro. When Hawaii became nd gather. Our fishing nupuaa whose people have
Daniel Carmichael (CPRC 29.2-33)	opaes, hihiwais, oopu, and a variety of fishes in the ocean	Hanawi - Palauhulu, Piinaau Haepuaena - Wailuanui Stream - Waioka Milo aka Kamilo - Kapa'akea - Waiohue, Kapiliula, Wailuaiki East and West, Makapipi	a variety of species	all streams between Kolea & Kuahiwi
		gh water in all streams fr	rom Kolea to Kuahiwi Na the ahupua'a of Keanae -	e
Puanani Holokai (CPRC 29.2-17)	hihiwai, opae	Makapipi - Honomanu	opae, hihiwai	Palahulu
	Problem Statement (C "Can not gather opae in	<b>Sathering):</b> 1 Palahulu stream becaus	se no water flow."	

Table 12-6. Summary of the 2001 testimonies submitted by NHLC related to gathering practices.

Declarant (CPRC Reference)	What Is Gathered By The Family	Streams Where Gathering Is Practiced	What Would Be Gathered If Water Were Available	Streams Where Gathering Would Be Practiced If Water Were Available
Cindy Ku'uipo Ka'auamo (CPRC 29.2-21)	opae, hi'iwai, prawns, o'opu, gold fish, haha	Makapipi to Honomanu	opae, hi'iwai	Wailuanui, Waiokamilo, Kulani, Palauhulu, Piinaau, Honomanu
	use. However, the right	e to land and man. It is to use water depends we respected the rights	of water use for many ge	but simply for man to t. The people of Keanae- merations. Our ancestors
		g the natural process of	around and on this land. of reproduction resulting her.	
			erature causing stagnation ong striving creatures, pl	n, allowing small ponds to ant life and even man.
			affects taro. Diseases, f rreat to our Hawaiian Cul	oreign pest, decrease in Iture as well as our way of
			iluanui Ahupua'a underst herited the rights of truste	
			ion Do you value the c . Restore our streams	comfort of man or the life Give life not death!"
Darlene Kaauamo (CPRC 29.2-19)	opae, hihiwai, haha, prawn, gold fish, prawns	Makapipi to Honomanu	opae, hihiwai, haha, gold fish	Wailuanui, Waiokamilo, Kulani, Palauhulu, Piinaau, Honomanu
	food supply in our stream causing hazard to the pe	in our streams causes ms, causes an increase ople & life that live in	of bacteria in the water t and around that area. M	creases the production of hat remain in our streams ost importantly, it using damage to our taro."
Frances Kaauamo (CPRC 29.2-45)				
	<b>Problem Statement (G</b> "Water flow in streams continuously."		0 0 which years back the s	same streams would flow
Hannah K. Kaauamo (CPRC 29.2-27)	pohole, leko, polu (?), opai, o'opu, hihiwai, HaHa	Makapipi to Kolea		
Leolani R. Kaauamo (CPRC 29.2-41)	Po-ne (sic), leko, poiup (?), ooipi (?), opoe (opae?), oopu, hihiwai, haha, pula, leko, pohole	Makapip (sic) to Kolea		in most of these streams but not enough water to sustain life
	<b>Problem Statement (G</b> "Not enough water for c		eam to spawn. Today the	re is no oopu."

Table 12-6. Continued. Summary of the 2001 testimonies submit	ted by NHLC related to gathering practices.
---	---

What Is Gathered By The Family	Streams Where Gathering Is Practiced	What Would Be Gathered If Water Were Available	Streams Where Gathering Would Be Practiced If Water Were Available
		opae, oopu, hihiwai	Wailuanui and Waiokamilo
pupu, kalo, paholi [possibly means pohole?], haha, luau	Kuhiwa - Kolea		Kuhiwai Kolea
opae, oopu, hihiwai, pulu, leko, pohole	Makapipi to Kolea		in most of these streams but not enough water to sustain life
		am to spawn. Today the	re is no oopu."
hihiwai, opae, oopu, prawns, ahole, mullet	Honomanu to Makapipi	hihiwai, opae, oopu, prawns	Honomanu to Makapipi
"Most years we have lo	osses to our taro crops de		
opae, hihiwai, oopu	from Honomanu to Makapipi	opae, hihiwai, oopu	Kolea, Honomanu
"When the rain stops, t	he water flow in Wailua	streams drop to almost	nothing. It is hard to
opae, hihiwai, oopu	from Makapipi to Honomanu	opae	Palahulu in Keanae
		y neighbor doesn't let an	y water down."
opae, hihiwai, o'opu, ferns, plants	from Kolea to Makapipi		
oopu, hihiwai, opae, pig hunting, prons (sic)	Kolea to Makapipi		
opae, hihiwai, prawns, Hawaiian herbs, ferns shoots, ti leaves, flowers,	all streams (Kolea to Makapipi)	Everything of use	Kolea to Makapipi
	By The Family pupu, kalo, paholi [possibly means pohole?], haha, luau Problem Statement ((C "EMI is taking too muo opae, oopu, hihiwai, pulu, leko, pohole Problem Statement ((C "Not enough water for hihiwai, opae, oopu, prawns, ahole, mullet Problem Statement ((C "Most years we have lo maintained cold enoug limited water." opae, hihiwai, oopu Problem Statement ((C "When the rain stops, t grow kalo with no wate opae, hihiwai, o'pu, ferns, plants oopu, hihiwai, opae, pig hunting, prons (sic) opae, hihiwai, prawns, Hawaiian herbs, ferns shoots, ti	What is Gathered By The FamilyGathering is Practicedpupu, kalo, paholi [possibly means pohole?], haha, luauKuhiwa - Kolea <b>Problem Statement (Gathering):</b> "EMI is taking too much water."•opae, oopu, hihiwai, pulu, leko, poholeMakapipi to Kolea pulu, leko, pohole <b>Problem Statement (Gathering):</b> "Not enough water for oopu to move downstre hihiwai, opae, oopu, mulletHonomanu to Makapipi mullet <b>Problem Statement (Gathering):</b> "Most years we have losses to our taro crops di maintained cold enough to keep taro healthy." limited water."•opae, hihiwai, oopu grow kalo with no water in the patches."•opae, hihiwai, oopu grow kalo with no water in the patches."•opae, hihiwai, o'opu, ferns, plantsfrom Kolea to Makapipi <b>Problem Statement (Gathering):</b> "Getting water to a few of our patches when m opae, hihiwai, o'opu, ferns, plantsfrom Kolea to Makapipiopae, hihiwai, opae, (sic)Kolea to Makapipiopae, hihiwai, opae, (sic)Kolea to Makapipiopae, hihiwai, opae, (sic)all streams (Kolea to Makapipi)	What is Gathered By The Family       Gathering is Practiced       Gathered Were Available         opae, oopu, hihiwai       opae, oopu, hihiwai         pupu, kalo, paholi [possibly means pohole?], haha, luau       Kuhiwa - Kolea [possibly means pohole?], haha, luau       opae, oopu, hihiwai         Problem Statement (Gathering): "EMI is taking too much water."       opae, oopu, hihiwai, Makapipi to Kolea pulu, leko, pohole         Problem Statement (Gathering): "Not enough water for oopu to move downstream to spawn. Today the hihiwai, opae, oopu, Honomanu to hihiwai, opae, oopu, Makapipi       mawns         Problem Statement (Gathering): "Most years we have losses to our taro crops due to drought. Water ter maintained cold enough to keep taro healthy. Taro farmers shouldn't ha limited water."         opae, hihiwai, oopu       from Honomanu to Makapipi         Problem Statement (Gathering): "Most years we have losses to our taro crops due to drought. Water ter maintained cold enough to keep taro healthy. Taro farmers shouldn't ha limited water."         opae, hihiwai, oopu       from Honomanu to Makapipi         Problem Statement (Gathering): "When the rain stops, the water flow in Wailua streams drop to almost grow kalo with no water in the patches."         opae, hihiwai, oopu       from Makapipi to Honomanu       opae         Problem Statement (Gathering): "Getting water to a few of our patches when my neighbor doesn't let an opae, hihiwai, o'opu, form Kolea to ferns, plants       makapipi         opae, hihiwai, opae, (sic)       Makapipi       ever

Table 12-6. Continued. Summary of the 2001 testimonies submitted by NHLC related to gathering practices.

stream life, today disturbed water flow prevents stream life to increase population."

Declarant (CPRC Reference)	What Is Gathered By The Family	Streams Where Gathering Is Practiced	What Would Be Gathered If Water Were Available	Streams Where Gathering Would Be Practiced If Water Were Available
Pualani Kimokeo (CPRC 29.2-7)	opae, hihiwai, o'opu, Hawaiian herbs, ferns shoots, ti leaves, flowers, lei making ferns	all streams of the Koolau	Everything	All (along the Koolau Valley)
		d be massive if the wate orked the loi all my life a	er was left alone. We wo	ould not have all these problems on our kalo &
Willie K. Kimokeo (CPRC 29.2-13)	oopu, hihiwai, opae, water cress, mountain kalo, haha	Kolea to Makapipi	oopu, hihiwai, opae, water cress	Kolea to Makapipi
	Problem Statement (C "Lack of water."	<u>Fathering):</u>		
Norman D. Martin Jr. (CPRC 29.2-15)	oopu, hihiwai, opai, everything	Kolea to Makapipi	oopu, opai, hihiwai	Kolea to Makapipi
	Problem Statement (C "Lack of water."	<u>Sathering):</u>		
B. Tau-a M. Pahukoa (CPRC 29.2-51)	opae, hihiwai	from Kolea to Makapipi		from Makapipi to Kolea & Waipio, Honomanu, Wailuaiki & Waialohe which is the muluwai of Palauhulu & Piinaau
	<b>Problem Statement (C</b> "The problem is not all	<b><u>Bathering):</u></b> of the water in the strea	ims meet the sea."	
Benjamin Smith Sr. (CPRC 29.2-37)	opai, hihiwai, oopu	Hanawi, Kapaula, Kopiliula, Kapa'akea, East and West Wailua Iki , Honomanu, Makapipi	opai, hihiwai, oopu	all streams between Kolea & Kuahiwa
Lucille L. Smith (CPRC 29.2-39)	opai, hihiwai & oopu	Hanawi, Makapipi, Kopiliula, Kapa'akea, East and West Wailua Iki , Kapahula, Waiohue, Honomanu	opai, hihiwai, oopu	streams between Kolea & Kuahiwa
Edward Wendt (CPRC 29.2-53)	opae, hihiwai, oopu		opai, hihiwai, oopu	Waiokamilo - Wailua Stream
	Problem Statement (C "Cause not enough free		natic life and to assist in	good taro growth."

Table 12-6. Continued. Summary of the 2001 testimonies submitted by NHLC related to gathering practices.

Historical uses of Puohokamoa Stream can also provide some insight into the protection of traditional and customary Hawaiian rights. Without delving into the extensive archive of literature (refer to Kumu Pono Associates, 2001a), Handy et al., in *Native Planters of Old Hawaii* (1972), provide a limited regional description as follows:

The northeast coast of East Maui has precipitous shores eroded by the waves which the trade winds sweep against its cliffs, islets, and inlets. Here the flank of Haleakala is steep, and as the

trade winds blow up across their forested slopes they are cooled and release their moisture, making this the wettest coastal region in all the islands.

O'opuola Gulch marked the boundary between Hamakua and Ko'olau. Its stream watered small *lo'i* areas, as did likewise Waikamoi, Puohokmaoa, and Haipuaena Streams.

Throughout wet Ko'olau, the wild taro growing along the streams and in the pockets high on the canyonlike walls of the gulches bespeaks former planting of stream taro along the watercourses, on the side of the gulches, and in the forest above. The same is true of the wild taros seen here and there in the present forest above the road and in protected spots on what was formerly low forest land, now used as pasture.

The cultural resources of Puohokamoa Stream were not classified by the HSA, likely due to a lack of archaeological survey coverage. Data were collected in in three general areas of: 1) archaeological; 2) historical; and 3) modern practices. Archaeological data were originally compiled by the State Historic Preservation Division and are only current to 1990, the date of the HSA (Table 12-7).

Table 12-7. Cultural resource elements evaluated as part of the Hawaii Stream Assessment for Puohokamoa Stream.

Category	Value
Survey coverage: The extent of archaeological survey coverage was analyzed and recorded as complete, partial, very limited, and none. Few valleys are completely surveyed. Many have little or no survey coverage.	None
<ul> <li>Predictability:</li> <li>The ability to predict what historic sites might be in unsurveyed areas was scored as high, medium, or low predictability or unable to predict. A high score was assigned if archaeologists were able to predict likely site patterns in a valley given historic documents, extensive archaeological surveys in nearby or similar valleys, and/or partial survey coverage. A low score was assigned if archaeologists were unable to predict site patterns in a valley because of a lack of historical or archaeological information. A medium score was assigned to all other cases.</li> </ul>	Not assessed
Number of Sites: The actual number of historic sites known in each valley is straightforward yet very time consuming to count. Instead, archaeologists used survey information to estimate the number of sites in each valley. These figures, adequate for this broad-based assessment, are only rough estimates.	None
Valley significance as a Whole District: The overall evaluation of each valley's significance was made considering each valley a district. The significance criteria of the National and Hawaii Registers of Historic Places was used. Criterion A applies if the district is significant in addressing broad patterns of prehistory or early history. Criterion B applies if the district is associated with important people (rulers) or deities. Criterion C applies if the district contains excellent examples of site types. Criterion D applies if the district is significant for information contained in its sites. Finally, Criterion E applies if the district is culturally significant for traditionally known places or events or for sites such as burials, religious structures, trails, and other culturally noteworthy sites.	Not assessed
Site Density: The density patterns of historic sites make up a variable extremely important to planners. Three ranks were assigned: low for very few sites due either to normal site patterning or extensive land alteration, moderate for scattered clusters of sites, and high for continuous sites. Valleys with moderate or high density patterns are generally considered moderate or high sensitivity areas.	Not assessed

Table 12-7. Continued.	Cultural resource elements evaluated as part of the Hawaii Stream Assessment for Puohokamoa
Stream.	


Category	Value
Site Specific Significance: The site specific significance variable was developed for valleys that had low densities of sites (very few sites) due either to normal site patterning or to extensive land alteration. An example of the first type might be a valley with housing sites on the side but too narrow for taro or housing sites on the valley floor. The second type might be a valley in which there had been sugar cane cultivation but a large heiau was left. The site specific significance of these valleys was categorized as either: 1) sites significant solely for information content which can undergo archaeological data recovery; or 2) sites significant for multiple criteria and merit preservation consideration. Those categorized as meriting preservation consideration would likely include large heiau, burial sites, and excellent examples of site types.	Not assessed
Overall Sensitivity: The overall sensitivity of a valley was ranked very high, high, moderate, low, or unknown. Very high sensitivity areas have moderate or high densities of sites with little or no land alteration. They are extremely important archaeological and/or cultural areas. High sensitivity areas have moderate or high densities of sites with little or no land alteration. Moderate sensitivity areas have very few sites with the sites meriting preservation consideration due to multiple criteria or moderate densities of sites with moderate land alteration. Low sensitivity areas have very few sites due to normal site patterning or due to extensive land alteration. The sites present are significant solely for their informational content, which enable mitigation through data recovery. Those valleys where no surveying had been undertaken and the ability to predict what might be found was low were ranked unknown.	Not assessed
Historic Resources: Several types of sites were considered by inclusion in this section, particularly bridges, sugar mills and irrigation systems. Those that are listed on the State or National register were inventoried, but none of them assessed.	Puohokamoa Stream Bridge
Taro Cultivation: Streams and stream water have been and continue to be an integral part of the Hawaiian lifestyle. The committee identified a number of factors important to current Hawaiian practices. These include current taro cultivation, the potential for taro cultivation, appurtenant rights, subsistence gathering areas, and stream-related mythology. The committee felt that a complete assessment of the cultural resources of Hawaii's streams should include these items but, due to limits of information, only the current cultivation of taro was included.	None

Fishponds are another integral part of traditional Hawaiian culture, which speaks volumes of Native Hawaiian skill and knowledge of aquaculture, which has also seen a resurgence of interest in recent years. Fishponds are found throughout the Hawaiian Islands and were either man-made or natural enclosures of water used for the raising and harvesting of fish and other aquatic organisms. Kikuchi (1973) identified six main types of fishponds, two of which are associated with streams (*loko wai*, *loko ia kalo*) and one type is associated with fresh water springs (*kaheka* or *hapunapuna*).

- Type III *Loko Wai*: An inland fresh water fishpond which is usually either a natural lake or swamp, which can contain ditches connected to a river, stream, or the sea, and which can contain sluice grates. Although most frequently occurring inland, *loko wai* are also located along the coast near the outlet of a stream.
- Type IV *Loko Ia Kalo*: A fishpond utilizing irrigated taro plots. *Loko ia kalo* are located inland along streams and on the coast in deltas and marshes.
- Type VI *Kaheka* and *Hapunapuna*: A natural pool or holding pond. The majority, if not all of these types of ponds, are anchialine ponds with naturally occurring shrimp and mollusks.

According to a 1990 Hawaii Coastal Zone Management Program *Hawaiian Fishpond Study for the Islands of Hawaii, Maui, Lanai, and Kauai*, there are no fishponds present in the Puohokamoa hydrologic unit (DHM, Inc., 1990). Another component in the assessment of traditional and customary Hawaiian rights is the presence of Department of Hawaiian Home Lands (DHHL) parcels within the surface water hydrologic unit. The mission of DHHL is to effectively manage the Hawaiian Home Lands trust and to develop and deliver land to native Hawaiians (PBR Hawaii, 2004). In September 2004, DHHL published the Maui Island Plan which served to examine infrastructure needs, provide development cost estimates, and identify priority areas for homestead development. Of the more than 31,000 acres of DHHL land on the island of Maui, no parcels occur within the Puohokamoa hydrologic unit (Figure 12-3).

Figure 12-2. Traditional ahupuaa boundaries in the vicinity of Puohokamoa hydrologic unit. This hydrologic unit spans three ahupuaa – East Makaiwa, Honomanu, Haiku Uka, and Kalialinui (Source: State of Hawaii, Office of Planning, 2007a; USGS 2001b).

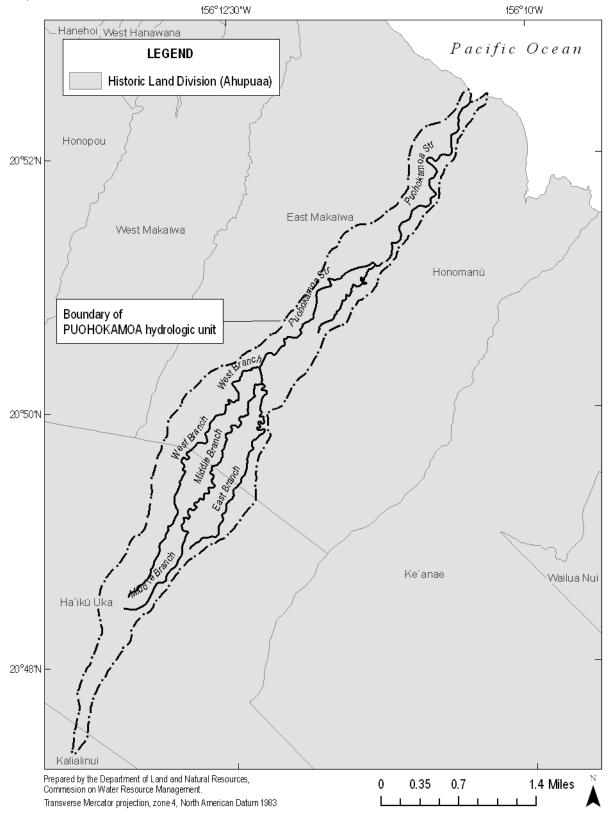

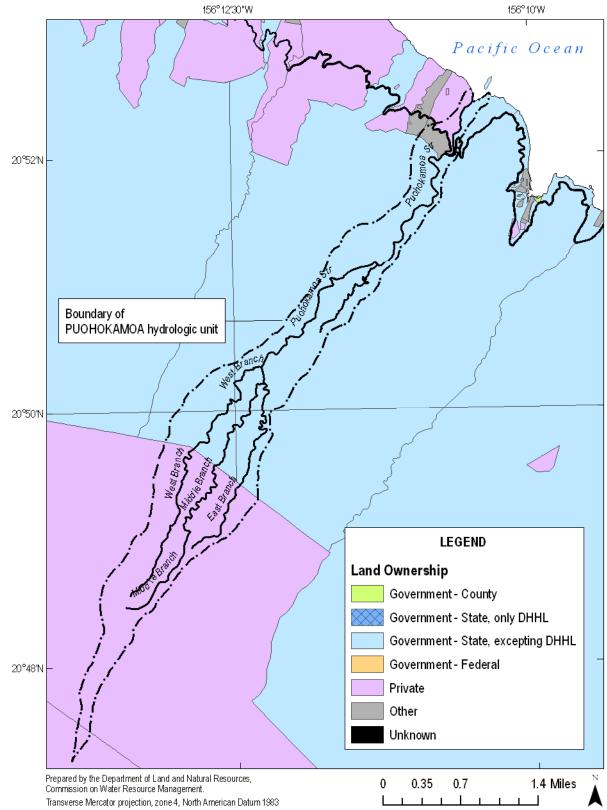


Figure 12-3. Land ownership in Puohokamoa hydrologic unit (Source: County of Maui, 2006; USGS 2001b).

# 13.0 Noninstream Uses

Under the State Water Code, noninstream uses are defined as "water that is diverted or removed from its stream channel...and includes the use of stream water outside of the channel for domestic, agricultural, and industrial purposes." Article XI, Section 3 of the State Constitution states: "The State shall conserve and protect agricultural lands, promote diversified agriculture, increase agricultural self-sufficiency and assure the availability of agriculturally sustainable lands." Water is crucial to agriculture and agricultural sustainability. Article XI, Section 3 also states, "Lands identified by the State or rezoned by its political subdivisions without meeting the standards and criteria established by the legislature and approved by a two-thirds vote of the body responsible for the reclassification or rezoning action. [Add Const Con 1978 and election Nov 7, 1978]." It is the availability of water that allows for the designation of Important Agricultural Lands.

In most cases, water is diverted from the stream channel via a physical diversion structure. Diversions take many forms, from small PVC pipes in the stream that remove relatively small amounts of water, to earthen auwai (ditches), hand-built rock walls, and concrete dams that remove relatively larger amounts of water from the stream. Water is most often used away from the stream and it is not returned; however, as in the case of taro fields and hydroelectric plants, water may be returned to the stream at a point downstream of its use. While the return of water to the stream would generally be considered a positive value, this introduces the need to consider water quality variables such as increased temperature, nutrients, and dissolved oxygen, which may impact other instream uses. Additionally, discharge of water from a ditch system into a stream may introduce invasive species.

In addition to the amount of water currently or potentially being diverted offstream, the Commission must also consider the diversion structure and the type of use, all of which impact instream uses. The wide range of diversion structures, as noted above, is what makes regulation of surface water particularly difficult, since one standard method cannot be depended upon for monitoring and measuring flow. The ease of diverting streamflow, whether by gravity-flow PVC pipe, pump, or a dug channel, also plays a role in the convenience of diverting surface water and the abundance of illegal, non-permitted diversions.

## **13.1 Stream Diversions**

Upon the enactment of the State Water Code and subsequent adoption of the Hawaii Administrative Rules, the Commission required the registration of all existing stream diversions statewide. The Commission categorized the diversions and filed registrations according to the registrant's last name or company name. While it is recognized that the ownership and/or lease of many of the properties with diversions has changed since then, the file reference (i.e., FILEREF) remains the name of the original registrant file (Table 13-1). Locations are depicted in Figure 13-19.

In Puohokamoa, East Maui Irrigation Company (EMI) operates three ditch systems, running from east to west, as part of the larger East Maui Irrigation System. Though EMI registered all of its "major" diversions (included in Table 13-1), the Commission did not require EMI to register what the company calls "minor" diversions and instead were provided with maps, lists, and photographs. These minor diversions may vary widely in construction. One example consists of a small concrete basin collecting ground water seepage, which then transports the collected water via a gravity-flow PVC pipe to a larger ditch, ultimately joining one of the primary systems. The contribution of these small seeps and springs to total streamflow is unknown. Information on EMI's minor diversions is listed in Table 13-2, and their locations depicted in Figure 13-19.

Table 13-1. Registered diversions in the Puohokamoa hydrologic unit.

[Source of photos are denoted at the end of each description; CWRM, Commission on Water Resource Management; DAR, Division of Aquatic Resources; EMI, East Maui Irrigation Company, Inc.; RMT, R.M. Towill Cooperation (R.M. Towill conducted field verifications on the island of Maui under contract with the Commission on Water Resource Management in late 2007); Arrows ( ) indicate general direction of water flow to into and through noninstream diversions; Chevrons ( ) indicate general direction of natural surface water flow]

	r through noninstream tive						
Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.140.6	EAST MAUI IRR MAUI DWS	2-4-016:		Yes	No	Yes	No

Water is diverted from West Puohokamoa Stream at Intake LP-5 into the Lower Kula Water System. Registrant identified water use is municipal. The diversion structure is concrete and has a divertible capacity of 5 mgd. Measurement of total flow of the Lower Kula Water System, including this and other intakes, is available from Maui DWS Piiholo Water Treatment Facility.

**Photos.** a) Upstream view of diversion intake structure (EMI, 05/1989); b) Close-up view of diversion intake structure from left bank of stream (RMT, 11/2007); c) Downstream view from atop diversion structure (RMT, 11/2007); d) Upstream view from diversion structure (RMT, 11/2007).



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.151.6	EAST MAUI IRR MAUI DWS	2-4-016:		Yes	No	Yes	No

Water is diverted from Puohokamoa Stream at Intake UF-2 into the Upper Kula Water System. Registrant identified water use is municipal. The diversion structure is concrete and has a divertible capacity of 1 mgd. Measurement of total flow of the Upper Kula Water System, including this and other intakes, is available from Maui DWS Olinda Water Treatment Facility.

**Photos.** a) Upstream view of impoundment structure on stream, with pipes to convey diverted water at left (EMI, 05/1989); b) Upstream view of conveyance pipes with impoundment in background, where pipes cross the stream channel (RMT, 11/2007); c) Downstream view of conveyance pipes running along left bank of stream, before running westward along Waikamoi flume (RMT, 11/2007).



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.162.6	EAST MAUI IRR	1-1-001:		Yes	No	Yes	No

Water is diverted from Puohokamoa Stream at Intake S-9 into the Spreckels Ditch. Registrant identified water use is for irrigation of approximately 36,000 acres of sugar and pineapple, and a variety of other crops, industrial cooling, manufacturing, and milling, hydroelectric, and livestock. The diversion structure is concrete and has a divertible capacity of 75 mgd. Measurement of total flow of Spreckels Ditch, including this and other intakes, is available from USGS gaging station 16588000 (Wailoa Ditch at Honopou near Huelo).

**Photos.** a) Downstream view of diversion structure on stream, with control gates on the left bank (EMI, 05/1989); b) Upstream view of Puohokamoa Stream with control gates in the foreground (RMT, 11/2007); c) Close-up view of control gates and water entering Spreckels Ditch (RMT, 11/2007); d) Downstream view of Puohokamoa Stream (RMT, 11/2007).



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

	V		/	U			
Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.174.6	EAST MAUI IRR MAUI DWS	2-4-016:		Yes	No	Yes	No

Water is diverted from East Puohokamoa Stream at Intake LP-3 into the Lower Kula Water System. Registrant identified water use is municipal. The diversion structure is concrete and has a divertible capacity of 5 mgd. Measurement of total flow of the Lower Kula Water System, including this and other intakes, is available from Maui DWS Piiholo Water Treatment Facility.

**Photos.** a) Upstream view of the diversion structure from the left bank (EMI, 05/1989); b) View of intake grate on diversion structure from the left bank (RMT, 11/2007); c) Downstream view from atop the diversion structure (RMT, 11/2007); d) Upstream view from the diversion structure (RMT, 11/2007).



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

Event ID	File Reference	Tax Map Key	Diversion	Active	Verified	Riparian	Rights Claim
		1 5	Amount (cfs)	(Yes/No)	(Yes/No)	(Yes/No)	(Yes/No)
REG.182.6	EAST MAUI IRR MAUI DWS	2-4-016:		Yes	No	Yes	No

Water is diverted from Puohokamoa Stream at Intake LP-4 into the Lower Kula Water System. Registrant identified water use is municipal. The diversion structure is concrete and has a divertible capacity of 5 mgd. Measurement of total flow of the Lower Kula Water System, including this and other intakes, is available from Maui DWS Piiholo Water Treatment Facility.

**Photos.** a) Upstream view of diversion structure with the conveyance pipe in the foreground (right) along the left bank (EMI, 05/1989); b) Close-up view of intake grate from the left bank (RMT, 11/2007); c) Upstream view of the pipeline running along the left bank with control valve in the foreground (RMT, 11/2007); d) Upstream view from the diversion structure (RMT, 11/2007).



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.193.6	EAST MAUI IRR	1-1-001:		Yes	No	Yes	No

Water is diverted from Puohokamoa Stream at Intake ML-3 into the Manuel Luis Ditch. Registrant identified water use is for irrigation of approximately 36,000 acres of sugar and pineapple, industrial manufacturing and milling, and livestock. The diversion structure is concrete and has a divertible capacity of 35 mgd. Measurement of total flow of Manuel Luis Ditch, including this and other intakes, is available from USGS gaging station 16592000 (Lowrie Ditch at Honopou Gulch near Huelo).

**Photos.** a) Viw of diversion structure (EMI, 05/1989); b) View of stream at the diversion structure (RMT, 10/2007); c) Downstream view from diversion structure (RMT, 10/2007); d) Upstream view from diversion structure (RMT, 10/2007); d) View of stream v



Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.202.6	EAST MAUI IRR	1-1-001:		Yes	No	Yes	No

Water is diverted from West Puohokamoa Stream at Intake ML-4 into the Manuel Luis Ditch. Registrant identified water use is for irrigation of approximately 36,000 acres of sugar and pineapple, industrial manufacturing and milling, and livestock. The diversion structure is concrete and has a divertible capacity of 3 mgd. Measurement of total flow of Manuel Luis Ditch, including this and other intakes, is available from USGS gaging station 16592000 (Lowrie Ditch at Honopou Gulch near Huelo).

**Photos.** a) Upstream view of diversion structure (EMI, 05/1989); b) Same upstream view of diversion structure (RMT, 10/2007); c) Water drops into the Manuel Luis Ditch running under the intake grate on the right bank of the diversion, and enters on the left bank of the ditch (RMT, 10/2007); d) Downstream view of Manuel Luis Ditch from diversion structure (RMT, 10/2007).

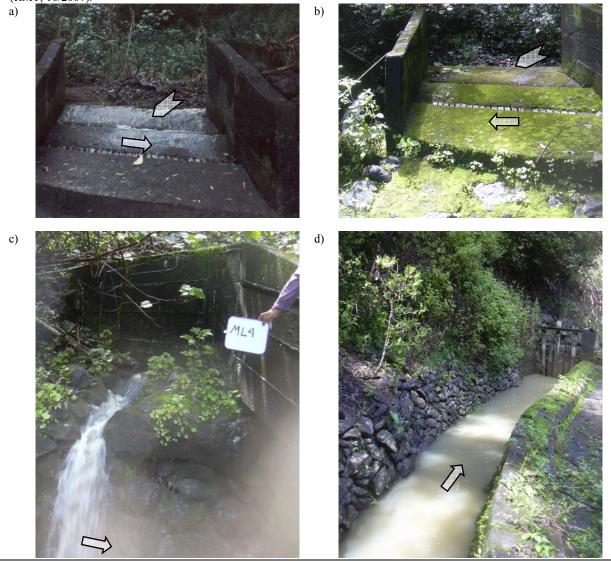


Table 13-1. Continued. Registered diversions in the Puohokamoa hydrologic unit.

e)

a)

Event ID	File Reference	Тах Мар Кеу	Diversion Amount (cfs)	Active (Yes/No)	Verified (Yes/No)	Riparian (Yes/No)	Rights Claim (Yes/No)
REG.202.6	EAST MAUI IRR	1-1-001:	. ,	Yes	No	Yes	No
(Continued	l)						

**Photos.** e) Upstream view of Manuel Luis Ditch, with water entering from stream at bottom left (RMT, 10/2007); f) Downstream view of West Puohokamoa Stream from diversion structure (RMT, 10/2007).



REG.304.6EAST MAULI IRR1-1-001:YesNoYesNoWater is diverted fromPuohokamoa Stream at Intake K-33 into the Koolau Ditch.Registrant identified water use is for

irrigation of approximately 36,000 acres of sugar, pineapple, and a variety of other crops, industrial cooling, manufacturing, and milling, hydroelectric, and livestock. The diversion structure is concrete and has a divertible capacity of 50 mgd. Measurement of total flow of Wailoa Ditch, including this and other intakes, is available from USGS gaging station 16588000 (Wailoa Ditch at Honopou near Huelo).

Photos. a) View of diversion structure from the right bank of the stream (EMI, 05/1989).



Table 13-2. Minor diversions on the EMI System in the Puohokamoa hydrologic unit.

Diversion ID	EMI Ditch System	Description
K-33a	Koolau	Puohokamoa sluice gate 6-inch steel pipe intake.
<b>Photos.</b> a) C 05/1989).	Concrete catchment basi	in captures seepage and transports water to Koolau Ditch via a 6-in. steel pipe (EMI,

a)

a)

S-9aSpreckelsEast Puohokamoa small stream intake.Photos. a) Tributary seeps flow directly into Spreckels Ditch (EMI, 05/1989).



Table 13-2. Continued. Minor diversions on the EMI System in the Puohokamoa hydrologic unit.

Diversion ID	EMI Ditch System	Description
S-9b	Spreckels	Middle Puohokamoa small stream intake.
Photos. a) Tri	ibutary seeps flow dire	ectly into Spreckels Ditch (EMI, 05/1989).
a)		



UF-1j Upper Kula 4-inch PVC pipe short intake to main flume.

**Photos.** a) Concrete catch basin captures seepage and conveys water to the Waikamoi Flume via a 4-in. PVC pipe (EMI, 05/1989); b) View of the entire pipe connected to the left wall of the flume (CWRM, 04/2009).

b)



a)



Diversion ID	EMI Ditch System	Description
UF-1k	Upper Kula	6-inch aluminum long pipe intake.
(EMI, 05/198	89); b) Upstream view o	<ul> <li>but ress seepage and conveys water to the Waikamoi Flume via a 6-in. aluminum pipe of the intake pipe (CWRM, 04/2009); c) View of the pipe connection to the flume of the pipe connection to the left wall of the flume (CWRM, 04/2009).</li> <li>b)</li> <li>b)</li> <li>b)</li> <li>c)</li> <lic)< li=""> <li>c)</li> <li>c)</li> <li>c)</li></lic)<></ul>
c)		d)

Table 13-2. Continued. Minor diversions on the EMI System in the Puohokamoa hydrologic unit.

Diversion ID	EMI Ditch System	Description
UF-11	Upper Kula	6-inch aluminum long pipe intake.
		ptures seepage and conveys water to the Waikamoi Flume via a 6-in. aluminum pipe
		of the intake pipe (CWRM, 04/2009); c) View of the pipe connection to the flume
(CWRM, 04/	2009); d) Close-up vie	w of the pipe connection to the left wall of the flume (CWRM, 04/2009).
a)	- The P	b)



iversion ID	EMI Ditch System	Description
F-1m	Upper Kula	6-inch aluminum long pipe intake.
(EMI, 05/198	(39); b) Upstream view	ptures seepage and conveys water to the Waikamoi Flume via a 6-in. aluminum pipe of the intake pipe (CWRM, 04/2009); c) View of the pipe connection to the flume ew of the pipe connection to the left wall of the flume (CWRM, 04/2009). b)
<ul> <li>a)</li> <li>b)</li> <li>b)</li> <li>c)</li> </ul>		d) d)

Table 13-2. Co	ntinued. Minor diversior	ns on the EMI System in the Puohokamoa hydrologic unit.
Diversion ID	EMI Ditch System	Description
UF-1n	Upper Kula	6-inch aluminum long pipe intake.
(EMI, 05/198	89); b) Upstream view o	tures seepage and conveys water to the Waikamoi Flume via a 6-in. aluminum pipe f the intake pipe (CWRM, 04/2009); c) View of the pipe connection to the flume v of the pipe connection to the left wall of the flume (CWRM, 04/2009).
a)		b)
c)		d)

Table 13-2. Continued. Minor diversions on the EMI System in the Puohokamoa hydrologic unit.

Diversion ID	EMI Ditch System	Description	

UF-10 Upper Kula 4-inch PVC pipe intake.

**Photos.** a) Concrete catch basin captures seepage and conveys water to the Waikamoi Flume via a 4-in. PVC pipe (EMI, 05/1989); b) Upstream view of the intake pipe (CWRM, 04/2009); c) View of the pipe connection to the flume (CWRM, 04/2009); d) Close-up view of the pipe connection to the left wall of the flume (CWRM, 04/2009).



Diversion ID	EMI Ditch System	Description
UF-2a	Upper Kula	4-inch PVC pipe long intake.
05/1989); b) the single pip a)	View of the intake pipe be connection to the left	e (CWRM, 04/2009); c) View of the UF-2a pipe (left) join with UF-2b pipe (center) and wall of the flum (CWRM, 04/2009).
c)		

Table 13-2. Continued. Minor diversions on the EMI System in the Puohokamoa hydrologic unit.

Diversion ID	EMI Ditch System	Description
UF-2b	Upper Kula	4-inch PVC pipe long intake.


Photos. a) Concrete catch basin captures seepage and conveys water to the Waikamoi Flume via a 4-in. PVC pipe (EMI, 05/1989); b) View of the intake pipe (CWRM, 04/2009); c) View of the UF-2a pipe (left) join with UF-2b pipe (center) and the single pipe connection to the left wall of the flume (CWRM, 04/2009).
a)





c)

UF-2cUpper Kula2-inch PVC pipe long intake.Photos. a) (EMI, 05/1989); b) View of the pipe connection to the left wall of the flume (CWRM, 04/2009).

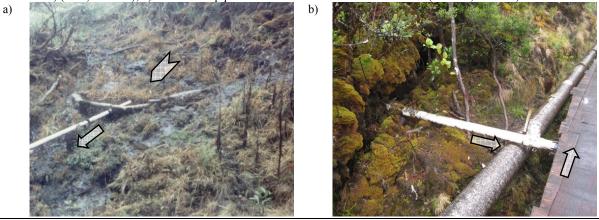

## 13.2 Ground Water Recharge

Following the establishment of instream flow standards, one of the proposed measures to increase streamflow may be to decrease the amount of water diverted from streams. Such a measure has important implications to ground water recharge because it affects the amount of water available for irrigation. Decreasing the amount of water diverted at the ditches located in east Maui affects the amount of water available for the irrigation of crops in west and central Maui. Since the early 20th century, about 100 billion gallons of water (274 million gallons per day) have been diverted each year from Maui streams for irrigation in west and central Maui. More than half of this diverted water, 59 billion gallons per year (162 million gallons per day), comes from east Maui (Engott and Vana, 2007).

The effects of irrigation water on ground water recharge can be analyzed using the water budget equation<sup>17</sup>. Engott and Vana (2007) at the USGS conducted a study that estimated each of the water budget components for west and central Maui using data from 1926 to 2004. Components of the water budget include rainfall, fog drip, irrigation, runoff, evapotranspiration, and recharge. Results of the study were separated into six historical periods: 1926-79, 1980-84, 1985-89, 1990-94, 1995-99, and 2000-04. From 1979 to 2004, ground water recharge decreased 44 percent from 693 million gallons per day to 391 million gallons per day (Figure 13-1). The low recharge rate in 2004 coincides with the lowest irrigation and rainfall rates that were 46 percent and 11 percent lower than those in 1979, respectively. During this period, agricultural lands decreased 21 percent from 112,657 acres in 1979 to 88,847 acres in 2004. Further analysis revealed that a 20 percent decrease in irrigation rate could result in a 9 percent reduction in recharge in the Lihue basin in Kauai, Hawaii. Since over half of the irrigation water for central Maui comes from east Maui, a 20 percent decrease in the amount of water diverted from streams in the east can potentially reduce recharge in central Maui by 5 percent.


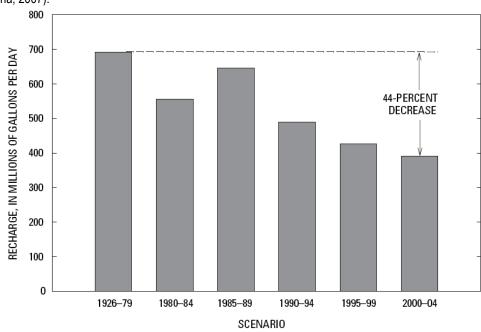


Figure 13-1. Estimated recharge for six historical periods between 1926 and 2004, central and west Maui, Hawaii (Source: Engott and Vana, 2007).

<sup>&</sup>lt;sup>17</sup> Water-budget is a balance between the amount of water leaving, entering, and being stored in the plant-soil system. The water budget method/equation is often used to estimate ground water recharge.

Droughts, or periods of lower than average rainfall, have been shown to drastically decrease ground water recharge (Figure 13-2). The period of drought that occurred in 1998-2002, during which rainfall was at least 30 percent lower than the average annual rainfall, was estimated to reduce recharge by 27 percent in west and central Maui (Engott and Vana, 2007). For example, on the island of Kauai, the drought conditions reduced recharge in Lihue basin by 34 to 37 percent (Izuka et al., 2005). Even though droughts can have exacerbating effects on ground water recharge, these effects are transient and are usually mitigated by periods of higher than average rainfall (Engott and Vana, 2007). However, prolonged loss of irrigation water caused by a decrease in the amount of water diverted by irrigation ditches has greater effects on the long-term trends of ground water levels.

Figure 13-2. Summary of estimated recharge, in million gallons per day, for various land-use and rainfall conditions in the Lihue Basin, Kauai, Hawaii (Source: Izuka et. al., 2005).

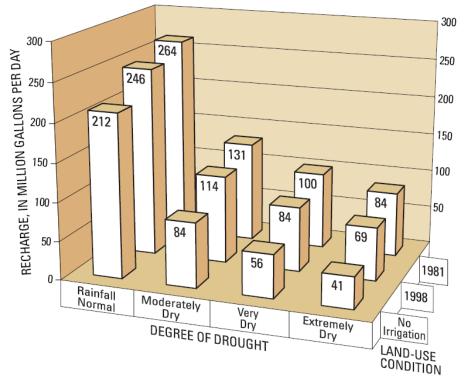

## **13.3 Classification of Agricultural Lands**

The identification and designation of Important Agricultural Lands (IAL) was approved in 1978 in an effort to promote agricultural viability. Important agricultural lands are those that are capable of producing sustained high agricultural yields for export or local consumption. These lands are identified based on current land use, soil and growing conditions, water availability, other agricultural land classifications, existing County plans, and proximity to supporting infrastructure conducive to agricultural productivity (DOA, 2009a). On June 29, 2009, the State Land Use Commission designated 27,102 acres of A&B agricultural lands at Wailuku and Makawao in the island of Maui as Important Agricultural Lands. More than 22,000 acres of the designated lands are irrigated with water from the EMI System (PR-2009-18, 72.0). This is the first IAL to be designated since the constitutional amendment for IAL was passed 30 years ago (PR-2009-18, 17.0).

The Agricultural Lands of Importance to the State of Hawaii (ALISH) were completed by the State Department of Agriculture (HDOA) in 1977, with the assistance of the Soil Conservation Service (SCS), U.S. Department of Agriculture, and the College of Tropical Agriculture, University of Hawaii. Three classes of agriculturally important lands were established for Hawaii in conjunction with the SCS in an effort to inventory prime agricultural lands nationwide. Hawaii's effort resulted in the classification system of lands as: 1) Prime agricultural land; 2) Unique agricultural land; and 3) Other important agricultural land; 2) Unique agricultural land; and 3) Other important agricultural land. Each classification was based on specific criteria such as soil characteristics, slope, flood frequency, and water supply. ALISH was intended to serve as a long-term planning guidance for land use decisions related to important agricultural lands. HDOA is currently in the process of developing agricultural incentives based on classifications of IAL. Based on the available data, less than two percent (0.05 square miles) of Puohokamoa is classified as "other important agricultural land".

From 1978 to 1980, HDOA prepared agricultural land use maps (ALUM) based on data from its Planning and Development Section and from SCS. The maps identified key commodity areas (with subclasses) consisting of: 1) Animal husbandry; 2) Field crops; 3) Orchards; 4) Pineapple; 5) Aquaculture; 6) Sugarcane; and Wetlands. About four percent (0.14 square miles) of Puohokamoa is identified to be suitable for "animal husbandry".

Though both ALISH and ALUM datasets are considerably outdated, many of the same agricultural assumptions may still hold true. The information is presented here to provide the Commission with present or potential noninstream use information (Figure 13-20).

## 13.4 East Maui Irrigation System

There are two major irrigation systems in east Maui, the East Maui Irrigation System (EMI) and the County of Maui, Department of Water Supply (Maui DWS) Upcountry System. These systems add considerable complexity to the Commission's role in weighing instream and noninstream uses (Figure 13-18). While this is largely due to the transfer of water from one hydrologic unit to another, the importance of both systems to agriculture and municipal water supply in Upcountry and Central Maui play a pivotal role in the consideration of economic impacts. This section includes a detailed discussion on the EMI System and its users, while the next section (Section 13.5) focuses on the Maui DWS Upcountry System.

## 13.4.1 System Overview

The EMI System consists of 388 separate intakes, 24 miles of ditch, 50 miles of tunnel, twelve inverted siphons, and numerous small feeders, dams, intakes, pipes, and flumes. Supporting infrastructure includes 62 miles of private roads and 15 miles of telephone lines. The system primarily captures surface water from multiple drainage basins in east Maui with a combined area of approximately 56,000 acres, of

which 18,000 acres are owned by EMI, and the rest by the State of Hawaii (Wilcox, 1996). The historic timeline of the EMI System is detailed in Table 13-3 and the complexity of the system illustrated in Figure 13-3. There have been few changes to the EMI System since the Wailoa Ditch was completed in 1923.

 Table 13-3.
 Historic Timeline of the East Maui Irrigation System (Source: Wilcox, 1996)

- 1869 Samuel Alexander and Henry Baldwin partner to purchase 11.94 acres of Bush Ranch.
- 1876 Alexander and Baldwin form the Hamakua Ditch Company on Maui.
- 1878 Construction of the Hamakua Ditch is completed (not to be confused with the Upper and Lower Hamakua Ditches on the island of Hawaii).
- 1894 Alexander & Baldwin (A&B) is established as an agency.
- 1898 A&B gain control of Hawaiian Commercial & Sugar (HC&S), then become its agent shortly thereafter.
  - Construction of Lowrie Ditch is started about this time. The Lowrie Ditch emanates from the Kailua watershed in the Makawao District, and receives water from a reservoir in Papaaea and Kailua Stream where the diversion intercepts the source of the older Haiku Ditch.
- 1900 A&B is incorporated with accumulated assets of \$1.5 million, compared with a net profit of just \$2,627.20 in 1895
  - Lowrie Ditch is completed with a capacity of 60 million gallons per day and is able to irrigate 6,000 acres. The 22-mile system is 75 percent open ditch, but also includes 74 tunnels, 19 flumes, and a total of 4760 feet of siphons.
- 1904 Construction begins on Koolau Ditch, which extends the system 10 miles toward Hana.
- 1905 Koolau Ditch is completed with a capacity of 85 million gallons per day, and consists of 7.5 miles of tunnel and 2.5 miles of open ditch and flume.
- 1908 The East Maui Irrigation Company (EMI) is formed to develop and administer the surface water for all the plantations owned, controlled, or managed by A&B.
  - A&B gains control of Kihei Plantation.
- 1912 The old Haiku Ditch is abandoned between 1912 and 1929.
- 1914 New Haiku Ditch is completed with a capacity of 100 million gallons per day. The system is mostly tunnel, partially lined, with a length of 54,044 feet.
- 1915 Kauhikoa Ditch is completed with a capacity of 110 million gallons per day and a length of 29,910 feet.
- 1918 Construction of Wailoa Ditch is started.
- 1923 Wailoa Ditch is completed with a capacity of 160 million gallons per day. The system is mostly tunnel, completely lined, with a length of 51,256 feet. Capacity was later increased to 195 million gallons per day (date unknown).

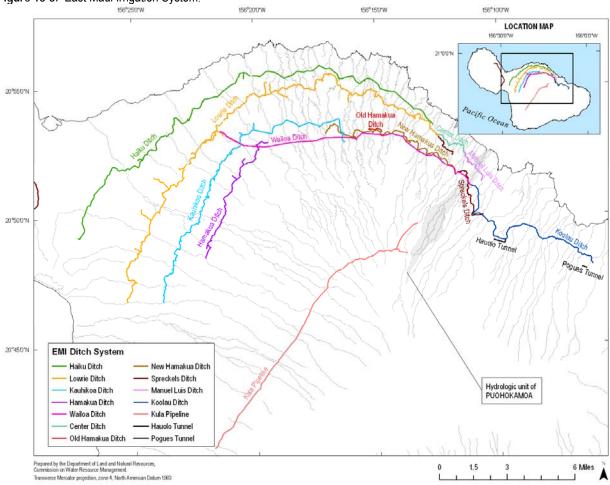


Figure 13-3. East Maui Irrigation System.

There are nine active ditches on the EMI System, some of which are essentially the same ditch with different names designated to different sections of the ditch. Refer to Figure 13-3 for a general system map or Figure 13-21 for a simplified schematic of the EMI system. The diversion system west of Maliko Gulch is not depicted in the schematic; however, that part of the system will be included in the following discussion. Koolau Ditch begins at Makapipi Stream and becomes Wailoa Ditch at Alo Stream. This ditch then ends at Kamole Weir, where the water may continue to flow to the Hamakua Ditch via the Hamakua Hydropower Plant, the Kauhikoa Ditch via the Paia Hydropower Plant, and the Lowrie Ditch via the Kaheka Hydropower Plant. Koolau/Wailoa Ditch is situated at the highest elevation of all ditches in the EMI System, except the Spreckels Ditch which begins near the 1,700 feet altitude at Nuaailua Stream. Flow in the Spreckels main ditch is conveyed to the Koolau/Wailoa Ditch via Puohokamoa Stream and Alo Stream. The lower elevation Spreckels distribution ditch conveys water from Alo Stream to the Kolea Reservoir, and from Oopuola Stream to the Papaaea Reservoir, where water can also be dropped to the Lowrie Ditch via Nailiilihaele Stream. New Hamakua Ditch begins at Alo Stream and the ditch water is eventually conveyed to Kauhikoa Ditch via Makaa, Halehaku, and Opana streams. Manuel Luis Ditch begins at Kolea Stream, transitions into Center Ditch at Waikamoi Stream, and then conveyed to Lowrie Ditch via Nailiilihaele Stream. Haiku Ditch is situated at the lowest elevation of all ditches in the EMI System. Its first intake is at Nailiilihaele Stream and the ditch continues through the HC&S plantation.

The EMI System has a delivery capacity of 450 million gallons per day, but delivers an average of 165 million gallons per day. However, the average water delivery can vary considerably due to variable climate conditions that affect surface water availability. Approximately 70 percent of the water delivered via the EMI System emanates from State lands, for which Alexander and Baldwin (A&B) and EMI currently hold revocable permits for the four license areas: Huelo, Honomanu, Keanae, and Nahiku (Figure 13-4).

#### 13.4.2 History of Water Licenses

Leases and water licenses have been granted in this area as early as 1876, immediately after the signing and ratification of a Reciprocity Treaty between the Kingdom of Hawaii and the United States (Kumu Pono Associates, 2001a, p.443), thus making sugar cultivation a more reliable economic prospect. At one point there were five licenses issued for this area. Two were subsequently combined, resulting in the four license areas. As the licenses expired, they were not reissued; instead, revocable permits were issued to the license holders. The intent was to eventually issue one license to cover all areas once the existing licenses had all expired. The licenses, and also the subsequent revocable permits, included clauses protecting the water rights of the native tenants for domestic use, including cultivation of taro. The licenses, and subsequent revocable permits, allow the taking of surface water and development of ground water via tunneling from state land. Commission staff reviewed 20 files pertaining to the water licenses/revocable permits that are housed in the Department of Land and Natural Resources' Land Division (State of Hawaii, Land Division, 2008). Documents in those files date from 1876 to present.

According to a collection of native traditions and historical accounts of east Maui, "While testimonies in some public hearings have expressed the sentiment that 'the waters were taken without permission'..., the initial development of the ditch system was authorized as a part of the Hawaiian Kingdom's program to promote prosperity for all the people of the Kingdom...Of importance to the native Hawaiian families of the land, each of the Water Licenses issued under the Kingdom included clauses which protected the pono wai (water rights) of native tenants of the respective lands through which the ditch system was developed (Kumu Pono Associates, 2001a, p.444)." Yet, as early as 1913, the USGS was reporting that "the present system of ditches takes practically the entire water supply of the region at times when the streams are low (Martin and Pierce, 1913, p.259).

In 1938, the "East Maui Water Agreement" was signed between the Territory of Hawaii and EMI, which by then had been incorporated (in 1908, through an Agreement between five agricultural companies) and which had consolidated the ditch system through leases of all ditches, water rights and easements, etc. (Kumu Pono Associates, 2001a, p.494). Under the terms of the East Maui Water Agreement, both parties granted to each other perpetual easements with a right to convey all waters, without charge, through any and all aqueducts owned respectively by EMI and the Territory, and over all lands owned by the two parties extending from Nahiku to Honopou inclusive. This agreement was made because the system traverses partly through government land and partly through EMI lands. Language in the Agreement allows for entities other than EMI to bid on the Water Licenses, but EMI has successfully bid on those licenses whenever they have been up for bid or renewal (State of Hawaii, Land Division, 2008).

The licenses were for different terms and with different covenants, and were renewed and changed from time to time. The final terms of the licenses follow; after which revocable permits were issued (Table 13-4).

Table 13-4. Terms of last license, before they became revocable permits

License area	General Lease number	Term
Huelo	GL 3578	1960-1981
Honomanu	GL 3695	1962-1986
Keanae	GL 3349	1950-1971
Nahiku	GL 3505	1955-1976

When the first of the four licenses expired, the State commissioned an appraisal to recommend rates to be charged for the Keanae License. The resulting report, published in 1972, summarizes some of the results of the 1938 Agreement. Because of the perpetual easements, "each party is assured of being able to convey its water through the aqueduct, with each paying the operation and maintenance cost in proportion to their respective use of it. So long as [EMI] is the successful bidder for all four State water licenses, it pays all the operation and maintenance costs...Subsequent to the agreement, the question of how much water was owned by each party was in effect settled by means of a study made in 1949 by Luna B. Leopold, Meteorologist...This map was used by [EMI] to determine the percentage of the rainfall on the government and private lands that are mauka of and tributary to the collection system for each of the four watersheds. It was assumed that the yields of the water collected in the aqueduct system are in proportion to the amount of rainfall on the respective land ownerships (Hull, 1972)." In other words, the ditch system collected water from both State and private lands. Ditch flow measurements were only collected at certain points, and included water originating on government as well as on private lands. In order to determine the amount of money to charge EMI for the water licenses, the State had to calculate the percentage of water in the ditch that came from government land and the percentage that came from private land (Table 13-5), and they did this using rainfall isohyets and acreage of the license areas. Those numbers were still in use as of 1972, and presumably until the end of all four water license agreements, as the other three (besides the then-recently expired Keanae License) were still in place at the time the 1972 report was published (Hull, 1972).

Table 13-5. Percentage of w	ater yield from the four license a	areas (as of 1972).
Watershed	Government (%)	Private (%)
Huelo	64.49	35.53
Honomanu	47.39	52.61
Keanae	79.19	20.81
Nahiku	95.02	4.98

Table 13-5. Percentage of water yield from the four license areas (as of 1972).

The correspondence and discussions over the course of many years indicate that the water was viewed as a commodity and that water permitted to flow into the ocean was considered waste. Originally the rates charged for the water licenses were low, to allow for construction costs. For many years after construction, lease amounts were determined according to the price of sugar, the annual quantity of water carried through the system, and the percentages of government and private lands from which the water contributed to the system (State of Hawaii, Land Division, 2008). Water yields were measured for each license area. Rate of the licenses fluctuated with the price of sugar, but the licenses included minimum and maximum sugar prices that could be used in the calculations, e.g. if the price of sugar exceeded the price ceiling in the license, the rental rate would be frozen for the remainder of the license period, using that maximum amount to calculate rent. The terms of the long-term licenses were renegotiated at the expiration of the license period, i.e. roughly every 20-35 years. Under the long-term lease, A&B was required to pay for a minimal take of water even if it was not available due to low flow, or not necessary due to high rainfall on the plantations (State of Hawaii, Land Division, 2008 and Hull, 1972).

Water yield is no longer measured per license area; flow for all four license areas is totaled at the Honopou Boundary. Total water supply is classified either as water runoff from EMI land or water runoff

from State-owned land. The water license areas are shown in Figure 13-4, along with other large landowners.

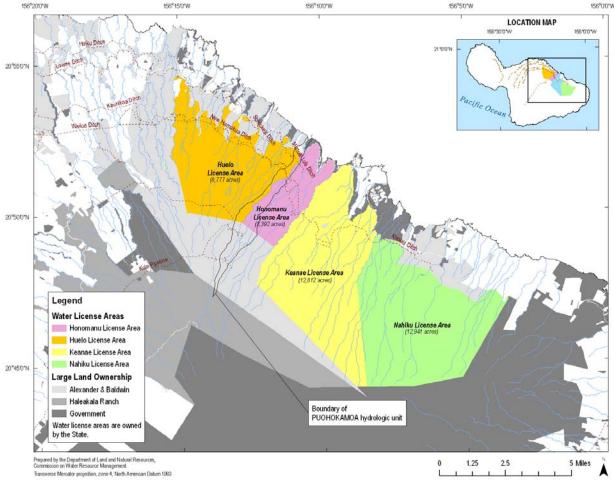


Figure 13-4. East Maui Water License Areas.

In 1965, HRS 171-58, as amended, required water rights to be leased through public auction or permitted on a month-to-month basis up to one year. The existing leases were grandfathered until their expiration. As mentioned above, the last water license agreement expired in 1986, after which all four license areas were disposed of as month-to-month revocable permits that were renewed annually, alternating in issuance to EMI and A&B. A&B proposed the consolidation of the four leases into a single lease, and in 1985 the Land Board approved a public auction sale for a 30-year water license incorporating the four licenses into a single license. In 1986, Native Hawaiian Legal Corporation (NHLC) challenged the Department of Land and Natural Resources (DLNR)'s decision that an Environmental Impact Statement (EIS) was not required and an Environmental Assessment (EA) was sufficient for the issuance of the 30year lease. The Circuit Court agreed that an EA was adequate, and NHLC appealed to the Supreme Court, who remanded back to Circuit Court to conduct a hearing pursuant to HRS section 343-7(b) on the matter. Further discussions resulted in several decisions, including that the Board of Land and Natural Resources (BLNR) and DLNR must work towards long-term resolution; and that interested parties work together to develop a watershed management plan for the water lease areas. The latter resulted in the creation of the East Maui Watershed Partnership and development of the East Maui Watershed Management Plan.

In 1987, the rate structure of the revocable permits was altered to a fixed flat fee independent of the amount of water diverted by A&B, and the rates were reduced by 25 percent to discount for the uncertainty that the annual permits would be renewed. However, the payments after 1987 were increased by 25 percent to remove the discount and convert the rates to long-term lease rentals. In 1988, the State performed an independent audit and set the benchmark rate based on the audit rate of five dollars per million gallons. In fiscal year 1999-2000, the permits were issued to A&B and EMI, with the fixed rates based on an assumed annual flow. The current revocable permits state that their rates are based on a staff appraisal dated May 7, 2001.

The revocable permits are currently regulated by the DLNR's Land Division, which collects fees for the permits. Those permits were most recently renewed in November 2007, with the following rental payments:

Revocable Permit No.	License Area	Area (acres)	Monthly Rent in 2008				
S-7264	Huelo	8,752.69	\$6,588				
S-7263	Honomanu	3,381.00	\$1,698				
S-7265	Keanae	10,768.00	\$3,477				
S-7266	Nahiku	10,111.22	\$1,427				

Table 13-6. Current revocable permits issued to A&B/EMI.

In May 2001, A&B and EMI filed an Application for a Long Term Water License with the BLNR seeking a long-term 30-year lease rather than continue with year-to-year revocable permits. Shortly thereafter, Na Moku Aupuni O Koolau Hui, Inc. ("Na Moku") and Maui Tomorrow requested a contested case hearing, with NHLC filing on behalf of petitioners Na Moku, Elizabeth Lapenia, Beatrice Kekahuna, and Marjorie Wallett. (In May 2007, Elizabeth Lapenia withdrew from the case and is no longer represented in it.) Concurrently, the Petitioners filed with the Commission a Petition to Amend the Interim Instream Flow Standard for 27 Streams in East Maui.

In May 2002 the BLNR deferred the reissuance of interim revocable permits and granted a holdover of the existing revocable permits on a month-to-month basis pending the results of the contested case hearing. A January 2003 BLNR "Findings of Fact and Conclusions of Law and Order" indicates that the "BLNR may enter into a lease of water emanating from State lands for transfer outside of the watershed of origin provided that such lease is issued in accordance with the procedures set forth in HRS Chapter 171 and provided that all diversions of stream water shall remain subject to the Interim Instream Flow Standards set by CWRM, and to any judgment of a court of competent jurisdiction establishing appurtenant or riparian rights in favor of downstream users (p.12)." This part of the Order was reversed by Circuit Court in October 2003 and the BLNR advised that if it does not believe it has the requisite expertise, it should wait until CWRM has acted or make its own application to establish instream flows. However, the Court Order goes on to state that the BLNR cannot "rubber-stamp" any Commission determination, meaning that at any BLNR contested case hearing, any party may challenge a Commission decision "if its methodology is wrong or some other error is committed." The Order also indicates legal precedent suggests that an EA should be required for issuance of a long-term lease, and perhaps an EIS depending upon the result of the EA.

In March 2005, the Petitioners filed Motions For Summary Relief contesting the "Holdover Decision" that allowed continued renewal of the revocable permits. The motions for summary relief were denied. However, in the Order denying the motions for summary relief, the Hearings Officer indicated that an evidentiary hearing could be held upon request to determine if interim releases of water were required in order for the Board to fulfill its public trust duties pending the completion of an environmental assessment and determination of amendments to interim IFS. At an early pre-hearing conference the parties agreed the streams in issue in the evidentiary hearing concerning interim relief were Honopou,

Puolua, and Hanehoi Streams in the Huelo license area, and Wailuanui, Waiokamilo, and Palauhulu Streams in Keanae. Accordingly, the evidentiary hearing was held in October and November 2005.

The resulting "Findings of Fact, Conclusions of Law, and Decision and Order ('Interim Order')" was issued by the Board of Land and Natural Resources in March 2007. This was intended to provide interim relief based on evidence introduced in the 2005 evidentiary hearing, and is not intended to foreshadow the Board's final decision in the case. The Interim Order concluded and ordered, among other things:

- That the DLNR "appoint an appropriate monitor... to ensure compliance with its order and to investigate and resolve if possible all complaints regarding stream flows by any of the parties to this proceeding."
- That A&B/EMI be immediately ordered to decrease current diversions on Waiokamilo Stream such that the water flow can be measured below Dam #3 at the rate of 6,000,000 gallons per day based on a monthly moving average on an annual basis.
- In the event that Beatrice Kekahuna increases the amount of acreage that she has in cultivation as taro loi, A&B/EMI may be required to decrease diversions (from Honopou Stream) to allow her sufficient water to irrigate her loi.

In May 2008, NHLC on behalf of the petitioners filed a Motion to Enforce the March 2007 Interim Order. Though there has been release of water into Waiokamilo and Kualani Streams, NHLC contends that the Interim Order has not been fully implemented largely due to the ability of the monitor to perform certain actions. Additionally, NHLC claims that Beatrice Kekahuna, Marjorie Wallett, and others still do not have adequate water to cultivate their taro.

#### 13.4.3 Hawaiian Commercial and Sugar Company


#### Sugar Production


EMI continues to provide water to HC&S, which is the largest producer of raw sugar in Hawaii, and only one of two remaining sugar plantations in the state. The other remaining plantation Gay and Robinson Inc. has announced its plan to cease sugar operations, harvesting its last crop in August 2010, and transition to biofuel (i.e., ethanol) production (Consillio, 2008). In 2006, HC&S produced about 81 percent of the total raw sugar in Hawaii, or approximately 173,600 tons, amounting to 3 percent of total U.S. sugar produced (A&B, 2007). However, production dropped in 2007 and 2008 to 165,000 and 145,000 tons, respectively, most likely a result from two consecutive years of severe drought conditions. HC&S also produces molasses, a by-product of sugar production, and specialty food grade sugars sold under their Maui Brand<sup>®</sup> trademark. Table 13-7 summarizes the harvest and production yields for HC&S from 2000 to 2008.

Year	Raw sugar produced (tons)	Percent of total raw sugar produced In Hawaii	Area harvested (acres)	Yield per acre (tons)	Average cost per ton (dollars)	Molasses produced (tons)	Specialty food- grade sugar produced (tons)
2008	145,000	75.0	16,691	8.6	*	52,200	27,500
2007	165,000	80.0	16,865	9.7	*	51,700	21,200
2006	173,600	81.0	16,950	10.2	*	55,900	15,500
2005	192,700	76.0	16,639	11.6	*	57,100	18,900
2004	198,800	77.0	16,890	11.8	435	65,100	15,500
2003	205,700	79.0	15,660	13.1	422	72,500	12,100
2002	215,900	79.0	16,557	13.0	332	74,300	11,000
2001	191,500	70.0	15,101	12.7	371	71,200	8,848
2000	210,269	*	17,266	12.2	331	70,551	*

Table 13-7. Summary of sugar-related harvests by HC&S for 2000-2008 (Source: A&B, 2002; 2003; 2005; 2007, 2009).

Overall, Hawaii sugar growers produce more sugar per acre than most other sugar-producing areas of the world; however, this advantage is offset by Hawaii's higher labor costs and higher transportation costs resulting from longer distance to the U.S. mainland market. The DBEDT *State of Hawaii Data Book* (2006) shows the dramatic decline in sugar crop sales as plantations have closed over the last 25 years. Figure 13-5 illustrates the decline of sugar, the steady value of pineapple sales, and the increase of other crops generally considered as diversified agriculture.



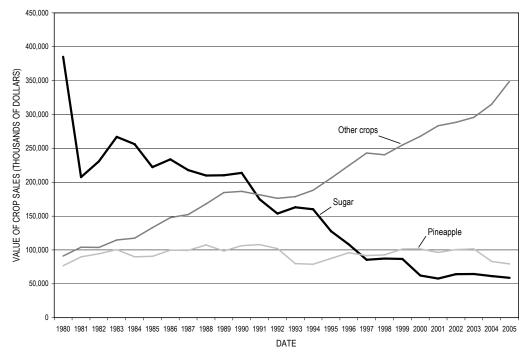

#### **Energy Production**

In addition to producing sugar, the HC&S Puunene Sugar Mill also provides a renewable energy alternative in the form of sugar cane bagasse, a fibrous byproduct of the sugar extraction process. Bagasse is the primary fuel used in boilers to generate steam, a requirement for sugar processing and for

driving steam turbine generators to produce electricity. HC&S also produces hydroelectric power from three run-of-river hydroelectric facilities on the Wailoa Ditch, which is supplied with water from several sources in east Maui. The hydraulic turbine generators located at the Kaheka, Paia, and Hamakua facilities on the Wailoa Ditch are capable of producing 4.5 megawatts, 1.1 megawatts, and 150 kilowatts, respectively (G. Hew, personal communication, August 2009).

Power generated from bagasse and the hydroelectric facilities is used to satisfy sugar mill power requirements first, while remaining electricity not used by the mill is sold to Maui Electric Company (MECO) for distribution, which currently amounts to approximately 7 percent of MECO's power sales. HC&S is under contract with MECO to supply, at specified rates, 12 megawatts of power from 7:00 a.m. to 9:00 p.m. daily except Sunday and 8 megawatts at all other times. According to MECO, power is sold as available, with an estimated oil savings of 44,700 barrels per year (MECO, 2008a). The contract provides for monetary penalties if these requirements are not met by HC&S. To avoid monetary penalties, HC&S would burn coal to generate power when bagasse and hydropower are not available.

The power generated by HC&S is critical to MECO because it is a "firm renewable energy, power that is available 24 hours a day, 7 days a week", as opposed to as-available power (e.g., solar and wind generated power) that cannot be consistenly relied upon (PR-2009-18, 25.0). Continued power production from HC&S helps to reduce overall dependence on fossil fuels, as well as to meet the Hawaii Clean Energy Initiative that 25 percent of the electricity sales are generated from renewable resources by 2010 (PR-2009-18, 25.0). During black-outs, MECO has requested the help of HC&S to generate backup power until MECO repairs its system.

#### Water Use

HC&S uses water from three main sources: 1) surface water from the EMI system; 2) surface water from the Wailuku Water system in west Maui that is operated jointly by HC&S and the Wailuku Water Company; and 3) ground water pumped from 16 brackish water wells located on the plantation. The EMI System was designed and constructed to take full advantage of the gravity flow of water from higher to lower elevations, thus minimizing pumping and the additional consumption of electrical power. For this reason, HC&S attempts to divert the maximum possible amount of water into the EMI system at the Wailoa Ditch level, which has a capacity of 195 million gallons per day, where the water can then be distributed by gravity flow to various fields and to HC&S' hydroelectric turbines to maximize the energy efficient use of this water (HC&S, 2009).

Currently, the HC&S sugar plantation consists of approximately 43,300 acres of land. Sugar is cultivated on roughly 35,000 acres, while the balance is leased to third parties, is not suitable for cultivation, or is used for plantation purposes (A&B, 2007). Approximately 29,000 acres are irrigated with water delivered by EMI. The total amount of water HC&S needs from EMI varies largely with weather and seasonal conditions, but ranges from a low of 134 million gallons per day in the winter months to a high of 268 million gallons per day during peak usage in the months of May to October (Findings of Fact, Conclusions of Law, and Decision and Order, 2007). From 2002 to 2004, HC&S received 71 percent of its surface water supply from EMI, while the remaining 29 percent was supplemental ground water. Of the 29,000 acres irrigated with EMI water, approximately 13,000 acres are located in the higher elevations of the plantation (mainly above Lowrie Ditch) where irrigation with pumped water is either geographically impossible and/or economically impracticable. Since these fields are dependent on water from the EMI System, they are highly susceptible to diminished yields during drought conditions and in the summer months when ditch flows are low (HC&S, 2009).

HC&S uses drip irrigation for most of its fields. Drip irrigation is the most efficient irrigation technology available today, which is typically 90 percent efficient as compared to sprinkler system that is 75 to 85 percent efficient. In 1986, HC&S completed a 12-year project to install a drip irrigation system across the

plantation. It was a 30 million dollar investment in water efficiency that would cost 90 million dollars if made today. To further maximize water use efficiency, the irrigation furrows were laid on exact 1.5 to 2 percent slope, which helps water move down the furrow without causing erosion (PR-2009-18, 43.0). The sugarcane fields not equipped with the drip irrigation system are irrigated with recycled mill water, which contains particulates that clog up the drip irrigation tubes. Thus, HC&S expended over 1 million dollars to install overhead sprinklers in these fields to be able to utilize the recycled mill water (HC&S, 2009)

Water is needed for irrigation as well as washing of the cane and to perform repairs on the drip irrigation tubing. During the summer when water is insufficient, the plantings are more prone to diseases and insect attacks. Irrigation water is applied based on the daily needs of each field, and not the average daily water use statistic, which at most times is an inaccurate representation of the irrigation requirement for each field. The specific needs of each field are based on the crop cycle and real time measurements of rainfall and evaporation that determine the soil moisture content of each field. To ensure the most effective and efficient use of water on the plantation, HC&S determines the irrigation requirements for each field on a day-to-day basis using a computerized water balance model. The model is essentially a water budget accounting procedure that balances the moisture input of rainfall and irrigation; the moisture output of evapotranspiration; and the change in soil-moisture storage based on the soil type in each field. A system of 15 automated weather stations is installed across the plantation that transmits hourly data used to compute daily evaporation rates using a modified Penman equation. Rainfall data is recorded daily from 41 manual gauges. Pan ratios documented in Ekern and Chang (1985) are used to estimate the amount of water required in various crop stages. Lastly, irrigation flow rates and the number of irrigation hours applied are also used to determine the water status for each field. The model then prioritizes the irrigation requirements of the fields, indicating which field(s) should receive water next (HC&S, 2009)

According to Lance Santo from the Hawaii Agriculture Research Center (PR-2009-18, 2.0), the conversion from furrow to drip irrigation in sugarcane fields resulted in less ground water recharge in the Kaanapali area and at the HC&S plantation. Consequently, irrigation wells in Kaanapali (Pump 6) and the sugarcane plantation (Well 16) have noticeable seawater intrusion and high electrical conductivity levels. The effects were more pronounced during the summer times when salinity reached as high as 6 mmhos per centimeter, while most crops cannot tolerate salinitly levels above 2 mmhos per centimeter. In general, vegetable crops are more sensitive to changes in salinity than sugarcane.

Although HC&S does not use the average daily water use statistic in its everyday operations, HC&S did calculate the average daily water use for its west Maui fields for the purpose of the Na Wai Eha Contested Case Hearing. The average daily water use rates for the Waihee-Hopoi fields in west Maui for 2004, 2005, and 2006 were 6,395, 7,831, and 6,254 gallons per acre per day, respectively. For comparison, HC&S also computed the average daily water use for the 29,000 acres of plantation fields irrigated with water delivered from the EMI System, which are somewhat lower because of greater seasonal variation in streamflow and HC&S' inability to supplement the 13,000 acres with pumped well water. The water use rates for these 29,000 acres ranged from a low of 4,619 gallons per acre per day in 2008 to a high of 6,858 gallons per acre per day in 2005 (HC&S, 2009).

Irrigation Water Requirement Estimation Decision Support System, IWREDSS (State of Hawaii, Commission on Water Resource Management, 2008b), is developed by the College of Tropical Agriculture and Human Resources, University of Hawaii at Manoa for the State of Hawaii. IWREDSS is an ArcGIS-based numerical simulation model that estimates irrigation requirements (IRR) and water budget components for different crops grown in the Hawaiian environment. The model accounts for different irrigation application systems (e.g., drip, sprinkler, flood), and water application practices (e.g., field capacity versus fixed depth). Model input parameters include rainfall, evaporation, soil water holding capacities, depth of water table, and various crop water management parameters including length of growing season, crop coefficient<sup>18</sup>, rooting depth, and crop evapotranspiration.

Calibration and validation of the model was based on the crop water requirement data for different crops from the Hawaii region United States Department of Agriculture (USDA), Natural Resource Conservation Service (NRCS) Handbook 38 (NRCS-USDA, 1996). Relative errors between the net irrigation requirements (NIR) estimated by the model and those estimated by NRCS range from less than 1 percent to a 26 percent overestimate. This difference may be attributed to the general nature of the technique NRCS used in estimating NIR. Results of the regression analysis indicate a good correlation ( $R^2 = 0.97$ ) between the two techniques; however, the NIR calculations by NRCS were consistently 8 percent higher than those of the IWREDSS model. Overall, the model is an appropriate and practical tool that can be used to assess the IRR of crops in Hawaii.

The model was used to estimate the IRR of sugarcane grown on HC&S plantations. A GIS map of the sugarcane fields was provided by HC&S as part of their comment submission (see CPRC 13.1-20). Simulations were conducted on 188 fields with the following fixed input parameters: 1) drip irrigation with 85 percent efficiency; 2) irrigation water applied to field capacity; and 3) maximum leaf index of 5.5 by default. A number of scenarios were selected to determine an average range of IRR for sugarcane grown on all 188 fields. The first set of 4 scenarios focuses on the effects of differing periods of water application on the IRR (Table 13-8). All of the scenarios excluding No. 1 assume that irrigation has stopped in the last two months of the crop cycle to initiate crop maturity. The second set of scenarios highlights the seasonal effects on the IRR (Table 13-9).

According to the simulation results, the average IRR for sugarcane ranges from 1,400 to 6,000 gallons per acre per day. Applying irrigation water in the last two months of the crop cycle has insignificant effects on the IRR. As expected, IRR is lowest in the winter season when rainfall is high, and highest in the summer season when rainfall is low. The model calculates IRR based on long-term rainfall records available at the weather stations located nearest to the sugarcane fields. Thus, the estimated IRR represents an average value for average weather conditions as opposed to wet or dry year conditions. However, the estimated IRR for the winter and summer seasons could be extrapolated to represent the IRR for wet years and dry years, respectively.

Scenario	Crop Cycle				Irrigation Period		
	Total (months)	Planting (1 <sup>st</sup> year)	Harvest (2 <sup>nd</sup> year)	Total (days)	Start (1 <sup>st</sup> year)	End (2 <sup>nd</sup> year)	(gad)
1	24	Mar	Mar	730	Mar	Feb	4,711
2	24	Mar	Feb	671	Mar	Dec	4,957
3	24	May	May	669	May	Feb	4,443
4	22	May	Feb	610	May	Dec	4,771

Table 13-8. Scenarios modeled with IWREDSS that focuses on crop cycle changes, and average IRR in gallons per acre per day (gad) for sugarcane cultivated in all 188 fields for each scenario.


Table 13-9. Scenarios modeled with IWREDSS that focuses on seasonal changes, and average IRR in gallons per acre per day (gad) for sugarcane cultivated in all 188 fields for each scenario.

Scenario	Season	Months	IRR (gad)
5	Fall	Sep-Nov	3,467
6	Winter	Dec-Feb	1,431
7	Spring	Mar-May	3,771
8	Summer	Jun-Aug	5,788

<sup>&</sup>lt;sup>18</sup> Crop coefficient is an empirically derived dimensionless number that relates potential evapotranspiration to the crop evapotranspiration. The coefficient is crop-specific.

The IWREDSS model has not been verified with field data specific to Hawaii conditions. Therefore, the model estimates may not accurately represent the actual water use for sugarcane growing in Hawaii. Compared with the water use estimates that HC&S provided, which ranged from a low of 4,619 gallons per acre per day to a high of 6,858 gallons per acre per day, the model estimates on sugarcane IRR appear to be much lower. This is attributed to the model using normal rainfall conditions to estimate IRR. During a drought year or a drier year, rainfall decreases and irrigation needs are much higher. Thus, the seasonal IRR estimate for the summer months (i.e., 5,788 gallons per acre per day) is a more representative estimate for comparison with the HC&S estimates.

Based on the range of water use rates provided by HC&S and the IWREDSS model, a comparison with the supply of water from the east Maui streams can then be made. Daily ditch flow values (in mgd) from July 2003 to May 2009, as measured at Honopou, were provided by EMI. Figures 13-6 to 13-9 provide the daily ditch flow values and a 30-day moving average for the four major ditch systems at Honopou (from highest to lowest in elevation): Wailoa, New Hamakua, Lowrie, and Haiku. While the average flow for Wailoa Ditch from July 2003 to May 2009 is 98.57 mgd, the daily flow varies greatly from a low of 11.15 mgd (July 16, 2008) to a high of 199.00 mgd (November 16, 2003).

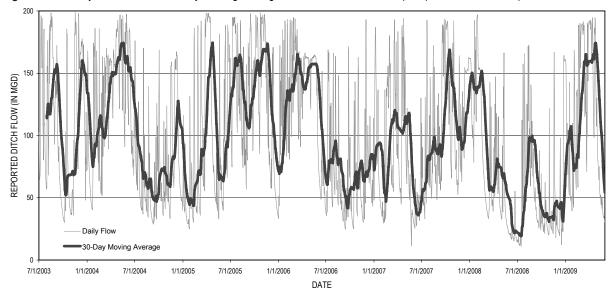



With New Hamakua Ditch located just below Wailoa Ditch for much of its length, the flow drops considerably to an average flow of 18.16 mgd for this period of record. The daily flows for New Hamakua range from 0 to 100.36 mgd (August 16, 2003) with a number of dry days experienced during June and July, 2008.

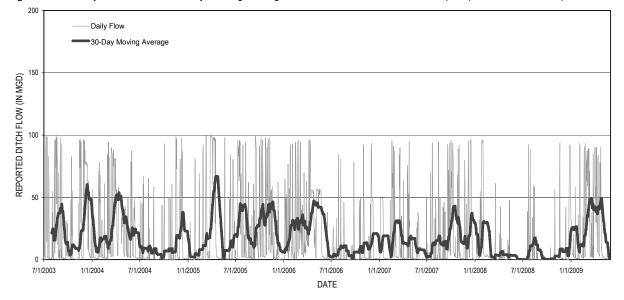


Figure 13-7. Daily ditch flow and 30-day moving average for New Hamakua Ditch at Honopou (Source: EMI, 2009).

Lowrie Ditch has an average flow of 15.17 mgd for this period of record, with daily flows ranging from 0 (January 2, 2009) to 72.40 mgd (March 26, 2005).

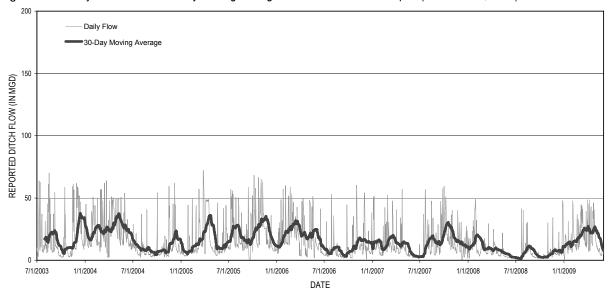


Figure 13-8. Daily ditch flow and 30-day moving average for Lowrie Ditch at Honopou (Source: EMI, 2009).

Haiku ditch is the lowest of the four ditches at Honopou. The average ditch flow during this period of record was 6.95 mgd, from a low of 0.05 mgd (June 6, 2008) to a high of 76.53 mgd (March 14, 2004).

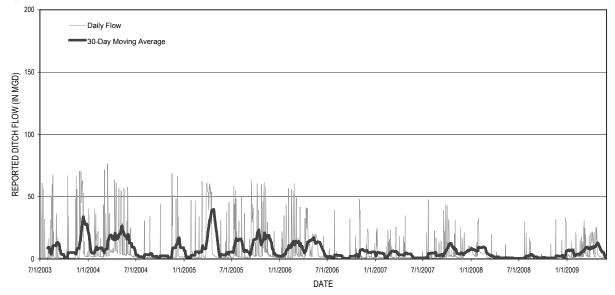


Figure 13-9. Daily ditch flow and 30-day moving average for Haiku Ditch at Honopou (Source: EMI, 2009).

Figure 13-10 combines the 30-day moving averages of all four ditches, along with the cumulative 30-day moving average, into a single graph. The range of water use provided by HC&S is indicated by the blue and red lines, denoting the low end of 133.95 mgd (based on 4,619 gad for 29,000 acres) and the high end of 198.88 mgd (based on 6,858 gad for 29,000 acres). While the long-term average of water provided by the entire EMI system is estimated at 165 mgd, the cumulative average for this period of record is 138.85 mgd. These graphs highlight the wide range of daily flows conveyed by the EMI system, and what may be actually available for use on a day-to-day basis by HC&S and others.

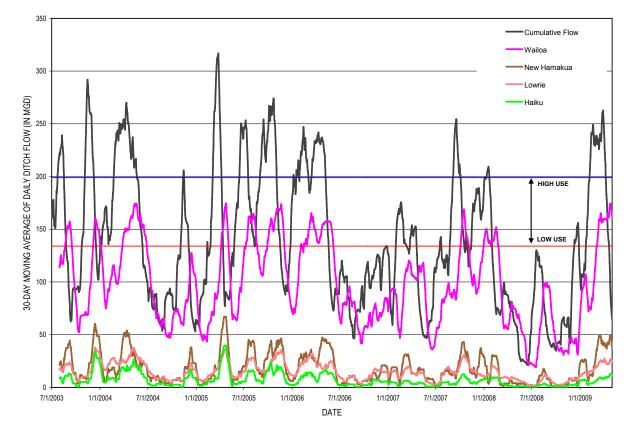


Figure 13-10. Individual and cumulative 30-day moving averages for Wailoa, New Hamakua, Lowrie and Haiku Ditches at Honopou, including estimated range of water use by HC&S (Source: EMI, 2009; HC&S 2009).

#### Economic Impact

The availability of surface water and securing this water at reasonable cost are essential to HC&S' ability to grow sugarcane at yields that will enable the company to remain financially viable. Table 13-10 provides a summary of A&B's agribusiness revenues for 2000 to 2008. A&B's four agribusiness companies, one of which is HC&S, saw a revenue increase of 3 percent (\$4.2 million) in 2006 over the previous year, generating an operating profit of \$6.9 million. HC&S itself earned a profit margin of \$2.6 million in 2006. The increase in revenue was attributed to higher revenues in repair services and trucking, higher-power sales, higher equipment rentals and soil sales, and higher specialty sugar and molasses sales. In comparison, lower revenues were reported in the bulk sugar sales (A&B, 2007). The last two years of severe drought conditions had significant impacts on the availability of surface water and crop yields, which lead to sizable financial losses. In 2008, A&B's agribusiness sector reported a \$13 million loss, caused largely by losses at HC&S. HC&S expects its losses to be greater in 2009 as the effects of drought will have greater impact in the 2009 harvest.

Year	Revenue (dollars)	Operating Profit (dollars)	Operating Profit Margin (percent)		
2008	\$ 124,300,000	\$(12,900,000)	(10.4)		
2007	\$ 123,700,000	\$ 200,000	0.16		
2006	\$ 127,400,000	\$ 6,900,000	5.4		
2005	\$ 123,200,000	\$ 11,200,000	9.1		
2004	\$ 112,800,000	\$ 4,800,000	4.3		
2003	\$ 112,900,000	\$ 5,100,000	4.5		
2002	\$ 112,700,000	\$ 13,800,000	12.2		
2001	\$ 105,976,000	\$ 5,660,000	5.3		
2000	\$ 107,510,000	\$ 7,522,000	7.0		

Table 13-10. Summary of A&B's agribusiness revenues for 2000 to 2008 (Source: A&B, 2002; 2005; 2007; 2009).

The EMI System was originally built for the purpose of supplying water to the HC&S sugarcane plantation. While other entities have become dependent on the EMI System, HC&S continues to be the largest user of the water delivered in the system. Figure 13-19 illustrates the interconnectedness of the different entities (including HC&S) dependent on the EMI System for water, and how this system is linked to the Maui DWS Upcountry System. Listed below are some of the possible economic impacts of limiting water availability to HC&S.

- Employment. Restricting water availability to HC&S will result in possible reduction of sugar production and sales, which will affect HC&S' ability to maintain and support its present staff. HC&S provides approximately 800 full-time jobs out of the estimated 1,750 agriculture-related jobs on Maui (Department of Business, Economic Development and Tourism [DBEDT], 2007). The company also currently has 910 retirees (PR-2009-18, 56.0). This amounts to \$47 million annually in wages and benefits to employees and retirees. HC&S has an apprenticeship program that not only maintains a skilled workforce for HC&S, but also provides a training ground for employees that move on to other companies in the public sector (PR-2009-18, 64.0). HC&S also partners with Ka Lima O Maui to provide employment services for individuals with disabilities (PR-2009-18, 66.0). Many companies and the Maui economy benefit from having locally trained employees rather than hiring from out-of-state.
- **Renewable energy**. The loss of hydroelectric and biomass fueled electric generation would affect MECO's ability to comply with its statutory obligation to generate electricity from renewable resources, as well as supply adequate energy to the local residents, especially during black-outs. This will also undermine the State's Clean Energy Initiative (HC&S, 2009).
- **Ground water**. Higher dependence on ground water for irrigation increases pumping costs. In addition, long term use of ground water that has even small amounts of sodium chloride can build up in the soil and affect crop yield. With decreased ground water recharge resulting from limiting surface water resources for irrigation, the wells within the plantation are even more susceptible to increased levels of salinity.
- Landscape and tourism. The HC&S plantation makes up a majority of the landscape in central Maui, keeping the island of Maui "green" as emphasized in many of the public review comments. Carol Reimann, Executive Director of the Maui Hotel & Lodging Association, stressed that "Maui's strength as a top tourism destination depends on the ability to showcase the island as a lush, green tropical paradise" (PR-2008-19). She further emphasized that it is lushness of the island that attracts visitors; thus, driving the local economy. The Visitor Industry provides 40 percent of all jobs on the island, generates 75 percent of the County's economy, and contributes about 40 percent of the total Real Property Tax collections (PR-2008-19).
- **Suppliers**. HC&S spends approximately \$100 million annually in the local economy to support its operations, primarily in Maui (HC&S, 2009). Many companies service HC&S; among them

are Maui Disposal Company, ChemSystems, Maguire Bearing Company, CWR Hawaii, Maui Petroleum, and BEI Hawaii – Maui. The viability of these suppliers may be challenged with any impacts to HC&S operations. According to Greg Heyd, Maui Branch Manager for BEI Hawaii, HC&S and upcountry farmers represent sales exceeding \$5 million (PR-2009-18, 60.0). KT&S is a subsidiary of A&B. Its primary purpose is to provide trucking services like hauling sugar and molasses, mobile equipment maintenance and repair services, and self-service storage facilities for HC&S. In effect, KT&S depends on HC&S to remain a viable business.

- Other users. Kula Agricultural Park (Park) is directly dependent on the viability of HC&S. The Park receives water from the Hamakua Ditch. While the Hamakua Ditch was described in Section 13.4.1 as part of the EMI System for simplicity, the jurisdiction of this ditch resides with HC&S because the ditch lies within the plantation. Restricting water availability to HC&S may affect its contractual obligation to provide the Park with 1.5 million gallons of ditch water per day (actual water use is included in Section 13.4.5). Maui Land and Pineapple Co. (MLP) is another entity that is dependent on HC&S for the delivery of water.
- DHHL. A Native Hawaiian Rehabilitation Fund was created to support the native Hawaiian community. A portion of the funding comes from the sale of sugarcane from State lands and the sale of surface water derived from public lands (PR-2009-18, 96.0). In 2009, DHHL received \$289,000 in total revenue from these sources. The DHHL also receives annual revenue of \$65,000 from the use of Hawaiian home lands (about 686 acres) at Puunene for sugarcane cultivation (PR-2009-18, 96.0). Reduction on stream water available for sugarcane cultivation will directly impact the Native Hawaiian Rehabilitation Fund.

# 13.4.4 Maui Land and Pineapple Company

Note: On November 3, 2009, MLP announced that it would cease all pineapple operations on the island of Maui and lay off an estimated 285 employees, or 45 pecent of its workforce (Segal, 2009). Due to the uncertainty of long-term plans for MLP, its land holdings, and water use associated with its operations, the Commission staff has decided to retain the information on water use and economic impact as part of this report. Further dicussions between MLP and the Commission will be necessary to determine impacts to continued water use and existing infrastructure.

MLP cultivates roughly 6,000 acres of pineapple, of which over 2,800 acres are situated in east Maui and rely on the EMI System for water. While the west Maui lands are less susceptible to drought (MLP, 2007), MLP will begin to concentrate pineapple growing exclusively in their east Maui fields. This is done in an effort to consolidate agricultural operations and to reduce transportation costs (PR-2008-18, 27.0). The company plans to downsize its pineapple cultivation in east Maui by 43 percent, from 2,800 acres to approximately 1,600 acres.

# Water Use

MLP relies on several sources of surface and ground water for irrigation. The Kailiili Water System and the Kailiili Reservoir are surface water systems owned and operated by MLP. The Kailiili Reservoir receives water from Opana and Awalau Streams. Flow from the east and west Opana Streams are diverted by EMI intake structures, and then passes through the Opana transmission tunnel for MLP, Haleakala Ranch, Kaonoulu Ranch, and Maui DWS use. MLP also diverts surface water from Hanawi Stream via the Nahiku Pump Station and into EMI's Koolau/Wailoa Ditch. The maximum divertible capacity of the pump is 3 million gallons per day. In 2008, MLP diverted less than 11 million gallons as compared to 42 million gallons in 2003. The decrease in water use is a result of weather patterns and less pineapple being cultivated over the years. MLP's ground water sources include the Kuhiwa and Hailiimaile well, where water is pumped into the Koolau/Wailoa Ditch. Only water from the Hailiimaile well can be pumped directly to irrigate the pineapple fields. During the drier seasons when surface water

sources are limited, MLP relies more on its ground water sources and DWS agricultural meters for irrigation (J. Pearson, personal communication, October 2009).

Under a License and Water Agreement between MLP and EMI, two "classes" of water are transported via the EMI System. The first class of water, which represents the majority of MLP's usage, is pumped by Maui Pineapple Co., Ltd. into the Koolau Ditch from Hanawi Stream at Nahiku near the start of the EMI System. The second class of water is what MLP is contractually allowed to withdraw, for a fee, from the EMI System when flow exceeds 100 million gallons per day. MLP estimates their water requirements from the EMI System at 4.5 million gallons per day from 2004 through 2009, and a reduction to approximately 3.1 million gallons per day from 2009 to 2016 (PR-2008-18, 27.0).

### Economic Impact

According to MLP's Annual Reports to the U.S. Securities and Exchange Commission, the last year that MLP had an operating profit for their pineapple operations was in 1999. Table 13-11 provides a summary of revenue and operating losses from 1999 to 2006. Some of the revenue losses can be attributed to increased importation of oversees pineapple products (specifically from Thailand); though it appears that the U.S. had begun imposing antidumping duties, as canned pineapple imports had decreased in 2001. Regardless, MLP ceased pineapple canning operations on Maui in June 2007, attributing the closure to increased imports of cheaper canned pineapple. Instead, MLP is choosing to focus on the production of pineapple juice and fresh fruit. The closure of Hawaii's last canned pineapple producer resulted in the loss of 120 jobs, or 27 percent of the company's workforce (Hao, 2007).

Table 13-11. Summary of MLP's revenues and operating losses for 1999 to 2006 (Source: MLP, 2002; 2004; 2005; 2007).

Year	Revenue (dollars)	Operating Loss (dollars)
2006	\$ 65,200,000	\$ (18,600,000)
2005	\$ 74,500,000	\$ (11,400,000)
2004	\$ 80,000,000	\$ (10,800,000)
2003	\$ 105,000,000	\$ (921,000)
2002	\$ 92,500,000	\$ (8,500,000)
2001	\$ 92,000,000	\$ (3,000,000)
2000	\$ 85,900,000	\$ (2,900,000)
1999	\$ 94,400,000	\$ 6,100,000

[Numbers in parentheses indicate operating losses; numbers not in parentheses are gains.]

Restricting water availability to MLP by establishing interim IFS on Hanawi Stream, one of the 27 petitioned streams, may add to the company's continued operating losses. Pumping costs will increase as MLP will need to supplement its irrigation needs with ground water from Kuhiwa and Hailiimaile wells. While MLP will shift all of the plantings to its east Maui field, MLP may need to further decrease the cultivated acreage by more than 43 percent as planned.

# 13.4.5 Kula Agricultural Park

The Kula Agricultural Park consists of 445 acres of land divided into 31 lots that range from 7 to 29 acres in size (Fukunaga and Associates, Inc., 2006). These agricultural lots are leased out to farmers in an effort to promote the development of diversified agriculture. Lease rates are \$100 per acre per year with tenure of the lease being 50 years. Currently, the lots are leased to a total of 26 farmers. The Kula area is known as a prime agricultural area for vegetable and flower farming in Maui (PR-2009-18, 58.0). Crops grown include vegetables (lettuce, tomato, Kula onions, zucchini, cucumbers, bush beans, sweet corn, eggplant, head cabbage, Chinese cabbage, peppers, ginger root), taro, bananas, mango, turf grass, nursery

plants, tuberose, plumeria, and landscape plants. The Office of Economic Development (OED) serves as the County of Maui's land management entity for the Kula Agricultural Park, while the Maui DWS is responsible for the operation and maintenance of the Park's water supply needs. Figure 13-11 is a map of the Park.

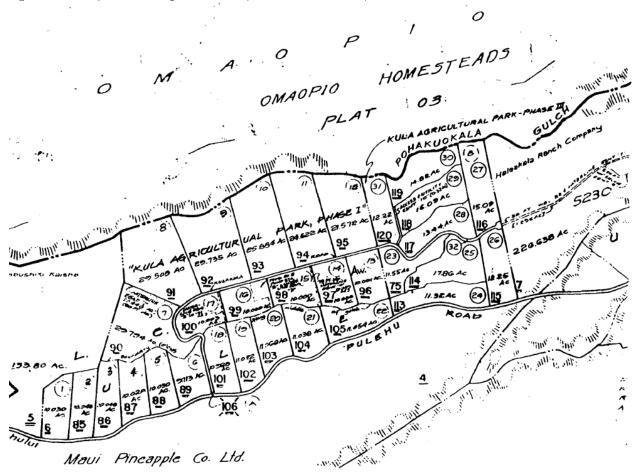


Figure 13-11. Map of the Kula Agricultural Park (Source: Maui OED, n.d.).

#### Water Use

The County of Maui currently has an agreement with EMI and A&B, through its agribusiness partner of HC&S, to withdraw up to 1.5 million gallons of non-potable water per day from the Hamakua Ditch to serve the needs of the Park. This water may also be used to serve, if the County desires, the agricultural needs of a certain Haleakala Ranch Company property located adjacent to the Park that is to be used as an agricultural park. The agreement also requires users of this water to conserve during times of water shortage (Fukunaga and Associates, Inc., 2006).

Two storage reservoirs are located in the Park, the lower reservoir with a capacity of 1.2 million gallons and the upper reservoir with a capacity of 4.2 million gallons. Currently, water is withdrawn from the Hamakua Ditch and conveyed to the Park via the pump station just upstream of A&B's Reservoir 40. Water is pumped to the lower reservoir first, and then pumped to the upper reservoir. Water use at the Park is metered by Maui DWS, and the annual water consumption at the Park from 1998 to 2008 is provided in Table 13-12. Water use for the past ten years averages 0.55 million gallons per day, which is 37 percent of the maximum allowable withdrawal amount.

Table 12 12	DWC motored concum	ntion for the Kule /	Arioultural Dark	(Source: Maui DWS 2000)
	Dwo metereu consum	puon ioi ine ruia F	Ayricultural Fark (	(Source: Maui DWS, 2009).

Year	Consumption (million gallons per day)
2008	0.473
2007	0.585
2006	0.605
2005	0.647
2004	0.527
2003	0.529
2002	0.585
2001	0.578
2000	0.580
1999	0.516
1998	0.479

# Economic Impact

Restricting water availability to the Kula Agricultural Park could have devastating impacts to the farmers and to the local economy. According to the Maui Office of Economic Development (PR-2008-18, 16.0), the economic value of the Park is over \$5 million annually. While some of the farmers have more than one lot, the farming operations within the Park are relatively small. Yet, most of the farmers' livelihoods rely on the profits made from their farms. Some of the farmers have made connections with mainland businesses and continue to provide a consistent supply of goods, while others have had difficulty in keeping up with the increasing demand for fresh local produce. While an adequate amount of water is needed to maintain a healthy crop, water is also required for shipping standards. To conserve water, most of the farms are equipped with drip irrigation. Vegetative cover and shade trees are planted to reduce evaporation losses. During the past two summers when farmers underwent a voluntary reduction of 10 percent in water use, many farmers had to curtail plantings in order to supply a sufficient amount of water for the main crops (County of Maui, Farm Bureau and Office of Economic Development, 2009). With further cuts in water availability, the farmers may not be able to maintain a dependable supply; therefore, losing the existing customer base. In the current economy, farmers are struggling to compete with mainland suppliers, who are able to sell produce at significantly lower prices because they operate at a larger scale. Small-scale farmers cannot operate at a loss due to the lack of an alternate source of income to cover that loss. For the same reason, it is nearly impossible to revive the business once a farm ceases operation.

The Park encourages diversified agriculture via small scale farming. Diversified agriculture involves a shift in farming practices toward planting crops high in demand. It helps to balance social and ecological factors, such as food and nutrition security, marketing and employment options, and natural resource management. On the social perspective, diversified agriculture broadens the household selection of foods and nutrition, creates more employment opportunities in the rural communities, and expands marketing options for food production systems. On the ecological perspective, diversified agriculture allows for optimization of land uses and the existing natural resource base; therefore, achieving practical and affordable means of agro-ecological management and reducing the risks associated with mono crop farm operations. Losing these contributions from small farmers could cause unpredictable social, ecological, and economic impacts.

# 13.4.6 County of Maui, Department of Water Supply

One of the Maui DWS Upcountry systems, the Makawao system, is served by EMI's Wailoa Ditch. As the second largest system out of the five separate water systems operated by Maui DWS, the Makawao system is supported by Maui's largest water treatment facility (WTF), the Kamole Weir WTF. This

facility has an estimated drought capacity of 4.5 million gallons per day, but is capable of producing 8 million gallons per day at maximum capacity (Maui DWS, 2009). Maui DWS also plans to increase capacity by 2.3 million gallons per day in 2015 (Findings of Fact, Conclusions of Law, and Decision and Order, 2007; Maui DWS, 2007e), as well as expand the raw water storage at Kamole (Maui DWS, 2009).

# Water Use

Under a December 31, 1973 agreement between EMI, HC&S, and the County of Maui, EMI agreed to collect and deliver to the County 12 million gallons per day for a term of 20 years, with an option for the County to receive an additional 4 million gallons per day after giving one year's written notice to EMI. Set to expire in 1993, this agreement was extended on several occasions, with the last extension expiring on April 30, 2000.

A Memorandum of Understanding (MOU) that was executed on April 13, 2000 provides for the County to continue to receive 12 million gallons per day from EMI's Wailoa Ditch with an option to receive an additional 4 million gallons. However, the MOU also includes stipulations for periods of low flow, whereby the County will receive a minimum allotment of 8.2 million gallons per day while HC&S will also receive 8.2 millions gallons per day, or 9.4 million gallons per day should fire flow be required (Maui DWS, 2007b). The MOU has a term of 25 years and sets water delivery rates at \$0.06 per thousand gallons. For the 2006 fiscal year, Maui DWS reported purchasing a total of 2,601 million gallons from EMI, at a cost of \$156,848, which includes various other sources in addition to the Wailoa Ditch (Maui DWS, 2007a).

Maui DWS receives an average of 7.1 million gallons per day from the EMI system, a portion of which goes directly to the Kula Agricultural Park and the remaining to Kamole. Water from the Kamole Weir WTF services approximately 6,571 water service connections in the Hailiimaile, Makawao, and Pukalani regions (Figure 13-12). It also serves as backup for the Haiku region in the event of pump failures or repairs and maintenance. During drought conditions, water from this facility is capable of servicing the entire Upcountry region (9,708 connections) if necessary (Maui DWS, 2007e). Metered consumption in the Makawao and Pukalani regions between 1998 and 2008 averaged 0.97 million gallons per day, while that of the Hailiimaile region averaged less than 0.1 million gallons per day (Maui DWS, 2009). Consumption in the Upper and Lower Kula regions is significantly higher.

In addition to the Upcountry District, Maui DWS also draws water from EMI's Koolau Ditch to supply the domestic uses in the Lower Nahiku region. Under an April 25, 1994 agreement between EMI, HC&S, and the County of Maui, EMI agrees to deliver to Maui DWS 20,000 gallons of water per day to serve the Nahiku community. In 2000, this agreement was extended for another 25 years. Ground water is collected in two storage tanks via a development tunnel (Nahiku Tunnel). A distribution line runs along Nahiku Road and serves the Nahiku area located makai of Hana Highway (J. Takakura, personal communication, August 2009). Based on the 1994 Agreement, the maximum daily usage of the Nahiku community is 12,600 gallons per day.

#### Economic Impact

Maui DWS relies on Kamole Weir WTF to provide a minimum of 4.5 million gallons per day to the Upcountry District. This is the drought period reliable capacity, a parameter used to characterize the capability of the reservoir or a WTF to maintain a reliable supply of water during the drier seasons or drought conditions (Freedman, 2009). With the recent drought, water use restrictions were applied to the Upcountry District based on historical use volume for each customer. Further reductions of consistent flow in EMI's Wailoa Ditch, may severely impact Maui DWS' ability to maintain the current drought period reliable capacity of the Kamole WTF. While the WTF is in the process of being upgraded with higher capacity filters, additional mitigative options will need to be considered should raw water supplied by Wailoa Ditch be reduced.

A statistical analysis (Freedman, 2009) was conducted to examine cost-effective strategies to maintain and even increase the drought period reliable capacity of the Kamole Weir WTF to meet the increasing water demands as well as to mitigate impacts of potential raw water supply reductions. One option is to provide raw water storage reservoir capacity to ensure a reliable supply of water to the Upcountry District in times of drought. The study shows that for less than 30 million gallon reduction in Wailoa Ditch flows, providing a 100 to 200 million gallon reservoir would maintain the existing drought period reliable capacity of the WTF. If Wailoa Ditch flow reductions are more than 30 million gallons, maintaining the drought period reliable capacity using additional basal ground water wells is most cost-effective.

Another option is to modify the existing Kamole Weir WTF intake structures to increase the amount of water that can be withdrawn from Wailoa Ditch during low flow conditions. The study shows that this method is more cost-effective than drilling new basal ground water wells to provide incremental drought period reliable capacity. However, under normal flow conditions, improvements to the intake structure would not appreciably increase the average supply of water to the Upcountry District.

The economic impacts to Maui DWS can be expressed in costs estimates for implementing the recommended strategies proposed in Freedman (2009). One of the drawbacks of providing raw water storage reservoir capacity is the large initial capital expenditures in reservoir construction. The study estimates an expenditure of \$15 to 30 million in building a 100 million gallon reservoir, and \$30 to 60 million for a 200 million gallon reservoir. The cost of providing new basal ground water wells to replace the existing drought period reliable capacity of 4.5 million gallons per day would be about \$32 million, or \$8 million for every 1 million gallons per day of additional Kamole Weir WTF's drought period reliable capacity. While specific plans to improve the WTF intake structures have not been examined, it can be assumed that these improvements would be more cost-effective than drilling basal wells.

# 13.5 County of Maui, Department of Water Supply Upcountry System

There are three Upcountry Maui DWS water systems served by east Maui streams: 1) Upper Kula system is served by Haipuaena, Waikamoi, and Puohokamoa Streams; 2) Lower Kula system is served by Honomanu, Haipuaena, and Waikamoi Streams; and 3) Makawao system, as previously discussed, is served by EMI's Wailoa Ditch. Maui DWS diverts the streams for the Upper and Lower Kula pipelines, and it is only the Makawao system whose source is the EMI System. Although the Makawao system has already been discussed in a previous section (Section 13.4.6), this section will include an in-depth discussion on the Maui DWS Upcountry System in its entirety, including the Makawao system, and present some of the data that can be used to compare water use in different Upcountry regions.

# 13.5.1 System Overview

The Maui DWS Upcountry Water District, illustrated as colored regions in Figure 13-12, includes the sub-districts of Upper and Lower Kula, Opana/Awalau, Kula Agricultural Park, Makawao-Pukalani, and Haiku-Kokomo (Maui DWS, 2009), with an estimated population of 30,981 people (Findings of Fact, Conclusions of Law, and Decision and Order, 2007). The Opana/Awalau and Kula Agricultural Park sub-divisions receive non-potable water while the rest of the sub-districts receive potable water. The potable water systems are supported by three water treatment facilities, Olinda WTF, Piiholo WTF, and Kamole Weir WTF.

The Upper Kula system is situated at the highest elevation (about 4,200 feet) of the three systems comprising the Maui DWS Upcountry System. It begins as a flume (also known as the Waikamoi Upper Flume), capturing surface water from Haipuaena Stream, middle and west branch of Puohokamoa Stream, and Waikamoi Stream. The flume is connected to a 36-inch transmission line at Waikamoi and then


captures additional water from Kailua Stream. The transmission line passes through the Waikamoi Reservoirs (two 15 million gallons reservoirs) and the Kahakapao Reservoirs (two 50 million gallons reservoirs) before reaching the Olinda WTF.

The Lower Kula system (also known as the Waikamoi Lower Pipeline) is situated at the 2,900 feet altitude and captures surface water primarily from Honomanu Stream, Haipuaena Stream, all branches of Puohokamoa Stream, and the east and west branch of Waikamoi Stream. Water from this system is treated at the Piiholo WTF and provides for domestic and agricultural uses in the Lower Kula region. Other than the 50 million gallon reservoir at the WTF, there are no other major reservoirs along the Lower Kula System.

The Makawao system is served by EMI's Wailoa Ditch that runs at approximately 1,100 feet elevation, and draws water from east Maui streams as far as Makapipi. Maui DWS treats the water at the Kamole Weir WTF and provides for domestic use in the Hailiimaile, Makawao, and Pukalani regions. It also serves as backup for the Haiku region in the event of pump failures or repairs and maintenance. During times of drought, water from this facility is pumped to the upper elevations to serve the Lower and Upper Kula regions (Maui DWS, 2009). Section 13.4.6 has more information on the Maui DWS Makawao system.

These three potable Upcountry systems are interconnected and rely on each other for backup during maintenance and repair. Surface water may also supplement the primary ground water sources (Haiku and Kaupakalua wells) for the region, but serves as backup in the event of pump failure or drought (Maui DWS, 2009). During drought conditions or times with lower than normal streamflow, water from the lower systems is frequently pumped to supplement the upper systems. Conversely, water from the upper systems may also be made available to supplement the lower systems during periods of higher than normal rainfall.

Figure 13-12. Maui DWS Upcountry District and its sub-districts (colored) overlaid on the Makawao-Pukalani-Kula Community Plan District boundaries (outlined) (Source: County of Maui, DWS, 2009).

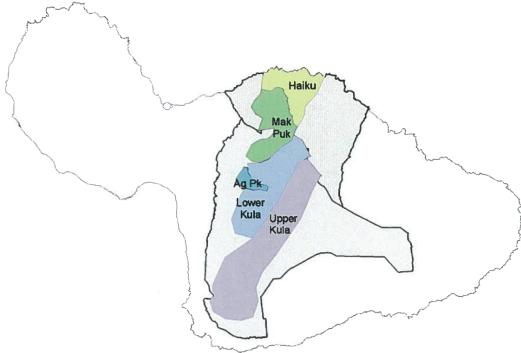

# 13.5.2 System Users

The domestic users in the Upcountry District receive potable water from the Maui DWS via three WTFs. Served by the Olinda WTF are the Olinda, Upper Kula, Ulupalakua and Kanaio regions. According to Maui DWS, about 1.5 million gallons must be available in the Olinda WTF clearwell to serve the small community of users along Olinda Road because these users do not have an alternate water source. The Lower Kula region, including DHHL homesites are served by the Piiholo WTF. Under an existing Water Rights Agreement between the State of Hawaii, Department of Hawaiian Homelands (DHHL), and Maui DWS executed on December 9, 1997, Maui DWS shall deliver 0.5 million gallons of potable water per day to the DHHL homesites in the Lower Kula region (about 676 residential units). The Hailiimaile, Makawao, and Pukalani regions are served by the Kamole Weir WTF, whose water source is from EMI's Wailoa Ditch. Domestic users of the Haiku region also depend on water from the Kamole Weir WTF for backup.

The agricultural users in the Upcountry District include Haleakala Ranch, Ulupalakua Ranch, Kaonoulu Ranch, Kula Agricultural Park, vegetable and fruit farmers in the Omaopio region, and individual farmers and ranchers throughout the general area. Other agricultural operations such as slaughterhouses, i.e., Nakasone Meats in Pukalani and A. DeCoite Packing House in Haiku, are also among the agricultural users in the Upcountry District. All of these users, excepting Kula Agricultural Park, receive potable water for their irrigation needs. Kula Agricultural Park receives non-potable water from HC&S' Hamakua Ditch (refer to Section 13.4.5).

Maui DWS provided data on the different types of crops and livestock in the Upcountry Maui District (Table 13-13). Among the vegetables and melons category are onions, cabbage, tomato, beans, taro, lettuce, cucumber, zucchini, herbs, corn, egg plant, parsley, etc. Fruits include bananas, oranges, persimmons, avocado, grapes, limes, lemons, cherimoya, mango, plums, peaches, and loquat. Livestock agriculture is mainly cattle and hog operations. While the data may not reflect the true and present

agricultural status, as farmers may plant vegetables and fruits simultaneously for crop rotation or certain lands may be left fallow, the data provide a general idea of the magnitude and diversity of agriculture that takes place in Upcountry Maui. Table 13-14 is a detailed look at the estimated counts and water needs for cattle and other livestock agriculture in Maui that depend on east Maui (between Waikamoi and Makapipi) water. Feral animals are wild goats, deer, and pigs that roam free on farm and ranch lands. While water is not intentionally provided to these animals, the presence of these feral animals is unavoidable even with proper fencing around the property. Therefore, the amount of water they use, which make up 22 percent of the total water use, is included in the table.

Table 13-13. Number of farms and estimated land area for the different types of crops and livestock in Maui (Source: County of	
Maui, DWS, 2009).	

Туре	Number of Farms	Acres
Pineapple	2	1,200
Vegetables and Melons	100	800
Fruits	150	600
Coffee	12	200
Nursery and Tropicals	12	150
Livestock	190	93,000

Table 13-14. Estimated counts and water needs for cattle and other livestock for cattle operations in Maui (Source: Maui Farm Bureau and OED, 2009).

[GPD is gallons per day; feral animals include feral goats, deer and pigs]

Animal Type	Count	Water Needs (GPD per head)	Total Water Needs		
Cattle	13,850	20	277,000		
Goats	1,630	3	4,890		
Horses	935	20	18,700		
Sheep	765	3	2,295		
Elk	100	10	1,000		
Feral Animals	17,100	5	85,500		
Total	34,380		389,385		

Currently, there is no prioritization of water uses among the system users although both DHHL and agricultural preservations are typically deemed high-priority uses in the county (Maui DWS, 2009). When a declaration of drought is in effect, Maui DWS may implement voluntary or mandatory water use restrictions for domestic users. While agricultural consumers have been exempt from water restrictions, agricultural users voluntarily conserve water usage by curtailing planting operations (Maui Farm Bureau and OED, 2009).

# 13.5.3 Water Use

While the Upcountry Water District and its sub-districts are determined by water sources and other operational parameters, some of the water use data presented is based on the Maui DWS Community Plan District boundaries, illustrated as outlines in Figure 13-12. These boundaries are political divisions used mainly for land use planning and do not shift with new source development or seasonal needs (Maui DWS, 2009). Although the two sets of boundaries do not match perfectly, water use data pertaining to the Upcountry Water District can be compared with those of the Community Plan District.

#### Historical and Current Uses

Metered water usage in the Upcountry District has steadily climbed over the past 12 years, with the largest portion going towards potable water use (Figure 13-13). In 2005, the total potable use was almost 7 million gallons per day or 92 percent of the combined potable and non-potable water use in the

Upcountry District (Maui DWS, 2009). For the Makawao-Pukalani-Kula Community Plan District, water use for agriculture and single-family residences constitute almost 50 percent of the total use. The two trends have been very similar over the past 5 years. In 2005, both uses were almost identical while in 2006, total single-family use was 3.118 million gallons per day and agricultural use was 2.732 million gallons per day. The two uses also have strong annual patterns, with water use rising approximately 1.5 million gallons per day during summer months versus winter months (Figure 13-14). Other water uses within the district are relatively low (Maui DWS, 2007d). The Lower Kula sub-district dominates total water use, averaging 2.2 million gallons per day from 1999 to 2008 (Figure 13-15).

Pookela Well is used as a back up well in the Makawao-Pukalani-Kula Community Plan District. An average of 0.188 million gallons per day was pumped from the well in 2008. From March 2008 to February 2009, an average of 0.328 million gallons per day was used. Two other wells, Kaupakalua and Haiku wells, are ground water sources that serve the Haiku sub-district (Maui DWS, 2009).


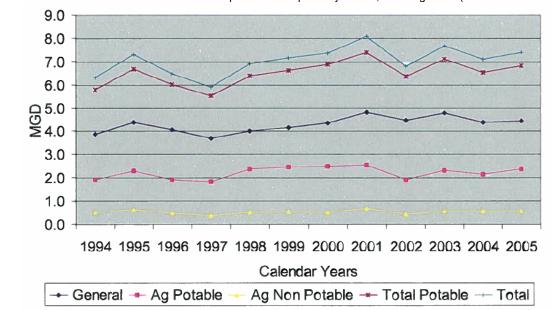



Figure 13-13. Maui DWS historical metered consumption for the Upcountry District, including Haiku (Source: Maui DWS, 2009).

Figure 13-14. Historical monthly water consumption by use class code for the Makawao-Pukalani-Kula Community Plan District, Maui (Source: Maui DWS, 2007d).

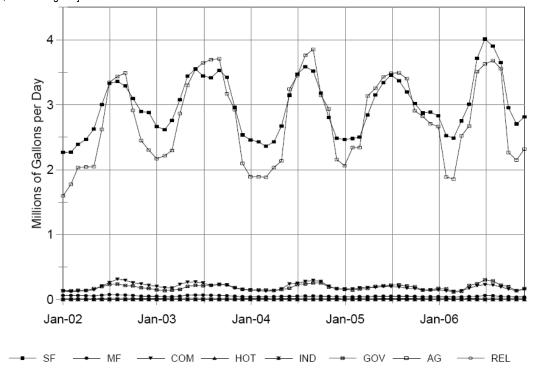


[SF is single family residential; MF is multi-family residential; COM is commercial; HOT is hotel; IND is industry; GOV is government; AG is agricultural; REL is religious]

Figure 13-15. Maui DWS metered consumption for the Upcountry District by sub-division, excluding the Haiku sub-division (Source: Maui DWS, 2009).

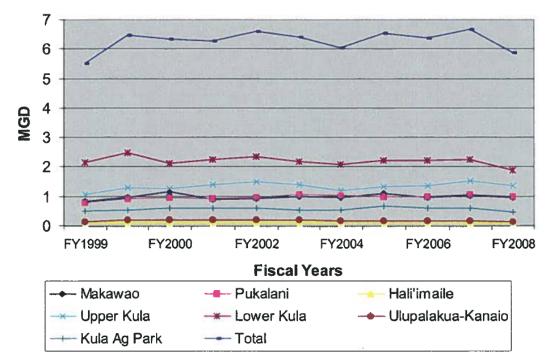

The Maui DWS monthly production logs for the three Upcountry water systems is illustrated in Figure 13-16. During the early summer months of May through July, the Kamole Weir WTF production increased from 77 million gallons per day in April to as high as 124 million gallons per day in June of 2008. During these drier periods, water was pumped from the lower systems to supplement the upper systems, especially the Olinda WTF, in which potable water production was much lower. In June and July of 2008, the water production at the Olinda WTF dropped to 5.4 million gallons per day.

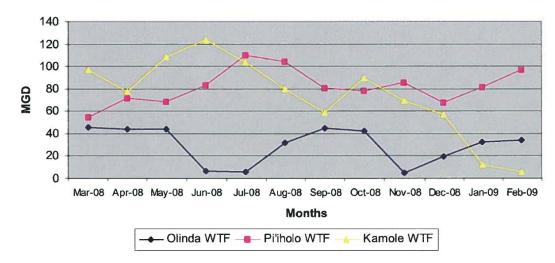




# Future Demands

The County of Maui, as part of its current effort to update the Maui County Water Use and Development Plan, is examining various resource options to meet the forecasted water needs and planning objectives of the Upcountry District over a 25 year planning period. Expansion of the Kamole Weir WTF is the primary long-term option affecting water delivered via the Wailoa Ditch; however, other options for the entire district include developing additional ground water sources, expanding/upgrading interconnections (booster pumps) between systems, detecting system leaks, and increasing water storage capacity (Maui DWS, 2007c).

Upcountry water demands are expected to increase, as depicted in Figure 13-17, based upon five water demand projections derived from varying growth scenarios (low, medium low, base, medium high, and high) to the year 2030. Maui DWS expects the combined potable and non-potable water consumption to increase from a low of 7.2 million gallons per day in 2000 to 8.8 million gallons per day (base case) by the year 2030 (Freedman, 2009). This increase is largely a result of increased population projection in the Makawao-Pukalani-Kula Community Plan District, which is expected to increase by 45 percent from 2000 to 2030. Population increase is accompanied by increased demand for resident and non-resident housing units from 8,747 units in 2004 to an expected increase of 4,374 additional units in 2030 (County of Maui, DWS, 2009). The actual consumption for 2008 is actually lower than predicted due to higher water prices and the recent economic downturn starting mid-2008. Water production requirements are higher than consumption requirements to account for un-metered uses (i.e., fire protection and line flushing) and system losses (Freedman, 2009).

Figure 13-17. Actual and projected water demands of all metered use classes for the Upcountry District, Maui (Source: Maui DWS, 2007d).

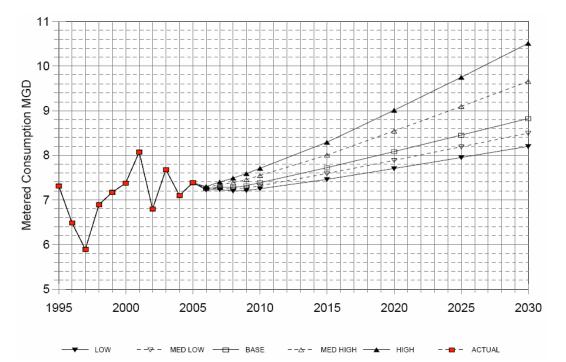

A new non-potable water line has been constructed that would draw water from the Kahakapau Reservoirs to serve the agricultural needs of the Upper Kula region. Since water from this non-potable line would replace the potable water that is currently used for agricultural purposes (Freedman, 2009), more potable water would be available to serve the domestic needs of the Upper Kula region.

The number of DHHL homesites is also expected to increase; therefore, increasing the surface water demand. Currently, there are 676 residential units in Waiohuli with an additional 800 lots planned in development. The estimated water needs for the new development is 0.72 million gallons per day (PR-2009-18, 96.0). The DHHL also recently completed the development of 66 agricultural lots (about 75 acres) in Keokea an estimated water demand of 0.23 million gallons per day (PR-2009-18, 96.0). Irrigation water will be provided by the new non-potable water line that would draw water from the Kahakapau Reservoirs to serve the agricultural needs of the Upper Kula region (PR-2009-18, 58.0). The Hawaii Farm Bureau Federation together with the Maui County Farm Bureau is working with NRCS to develop this new water line that originates from the Olinda WTF to Keokea, a distance of 9.4 miles with 15 miles of lateral service line (PR-2009-18, 17.0). The system is designed to deliver 3 million gallons per day and services 473 acres (DOA, 2009b). Since water from this non-potable line would replace the potable water that is currently used for agricultural purposes (Freedman, 2009), more potable water would be available to serve the domestic needs of the Upper Kula region.

# 13.5.4 Economic Impact

The economic impacts of restricting water availability to the Maui DWS Upcountry System, particularly the Upper and Lower Kula systems, are complex due to the interconnectedness of the two systems, as well as the vast amount of users dependent on the systems for water. Figure 13-18 depicts the connection between the Maui DWS Upcountry System and the EMI System, and the users of the systems to help better understand and identify the different entities impacted by the possibility of water restriction resulting from the establishment of interim IFS. The following attempts to outline, in no particular order

of importance, some if not all of the possible economic impacts of restricting water to the Maui DWS Upcountry System.

- Power and pumping costs. In 2007, over 26 percent (more than 10.5 million dollars) of Maui DWS' operating costs were attributed to power and pumping costs associated with pumping water from the lower elevations to supplement the upper regions. For instance, Maui DWS pumps water from the Kamole Weir WTF to the upper systems during the summer or drier months. In July 2008, power and pumping costs at the Kamole Weir WTF tripled that amount in February (Maui DWS, 2009). By restricting water availability to the Upper and Lower Kula systems, these power and pumping costs may increase.
- Mitigation costs. Various options are proposed to mitigate the impacts of potential raw water supply reductions on drought period reliable capacities of the Upcountry System. One of the options is additional reservoir capacity on the Lower Kula system that not only optimizes drought service reliability, but also reduces system pumping energy requirements (Freedman, 2009). The only raw water storage reservoir in the Lower Kula system is that at the Piiholo WTF. Potable water from EMI's Wailoa Ditch is pumped from Kamole Weir to supplement the Lower and Upper Kula systems. With increasing backlog of new water service demand in the Upcountry District, adding a raw water storage reservoir in the Lower Kula system would alleviate the long term operating costs. While the location of a new reservoir has not been determined, the optimum size of the reservoir would be between 100 to 300 million gallons. A new raw water storage reservoir would require total near term capital costs in excess of \$50 million (Freedman, 2009).
- Increasing demand. Growth in water demand on the Upcountry District is very expensive. Statistical analyses (Freedman, 2009) show that a new water service costs \$14 to \$19 per gallon per day for the Upcountry System. A typical 600 gallon per day of new service connection averages over \$9,000 of capital costs to provide for system source improvements. In addition, the new upcountry water line that is under construction is planned to serve 473 acres of agricultural lands. Limiting water supply to this line is estimated to produce approximately \$2 million (1997 dollar) in sconomic loss (DOA, 2009b).
- Existing domestic needs. Under existing conditions, the Upcountry residents are already prone to seasonal restrictions on water use. Further water use restrictions would negatively impact the community, especially those in the Olinda region and DHHL homesites. According to Maui DWS, the small community of domestic users along Olinda Road does not have an alternate source of water due to its location relative to the Olinda WTF. Maui DWS is also under an agreement with the State to provide DHHL's Waiohuli-Keokea sub-divisions 0.5 million gallons of potable water because DHHL does not have its own potable water source (County of Maui, DWS, 2009).
- Agriculture. When surface water availability decreases in the drier seasons or during drought conditions, farmers and ranchers alter planting and/or irrigation schedules to help conserve water. As a result, agricultural production and profits decrease. During the 2000-2002 drought, state-wide cattle losses were projected at \$9 million (County of Maui, DWS, 2009). A similar statistic was reported for the 1996 drought that affected Hawaii, Maui, and Molokai. Another critical component of agriculture is its impact on the ability of Hawaii to remain self-sufficient. Hawaii is heavily dependent on imported goods, making it difficult for local farmers to stay viable. Local farmers provide fresher and a greater diversity of products that are oftentimes more costly than imported goods. Diversified agriculture is also the ability to raise animal breeds or types of crops that are best adapted to Hawaii conditions, rather than importing those that may prove destructive to the agricultural community. While Hawaii may not become fully self-sufficient, continued and increased reliance on imported goods is unhealthy for its people and the economy.

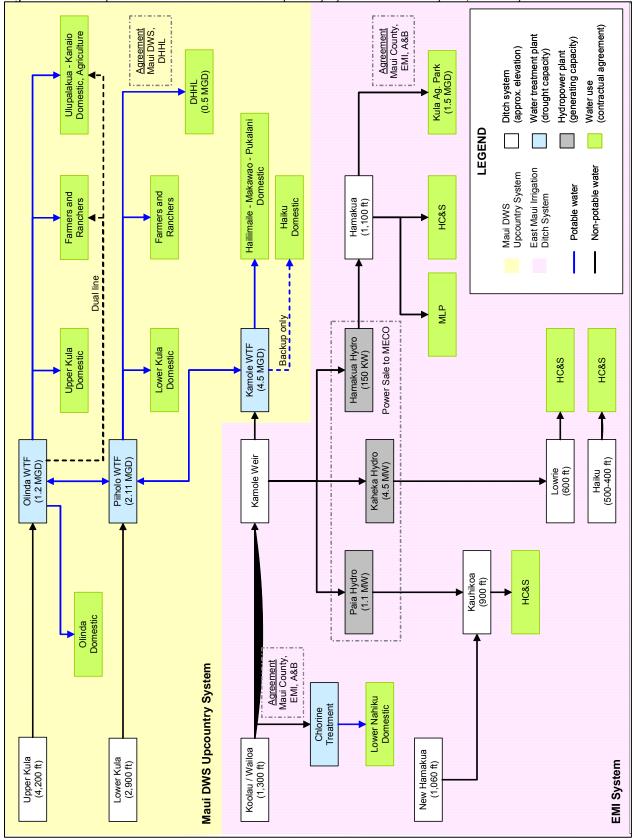


Figure 13-18. A simplified schematic of the Maui DWS Upcountry System and the EMI System, and the system users.

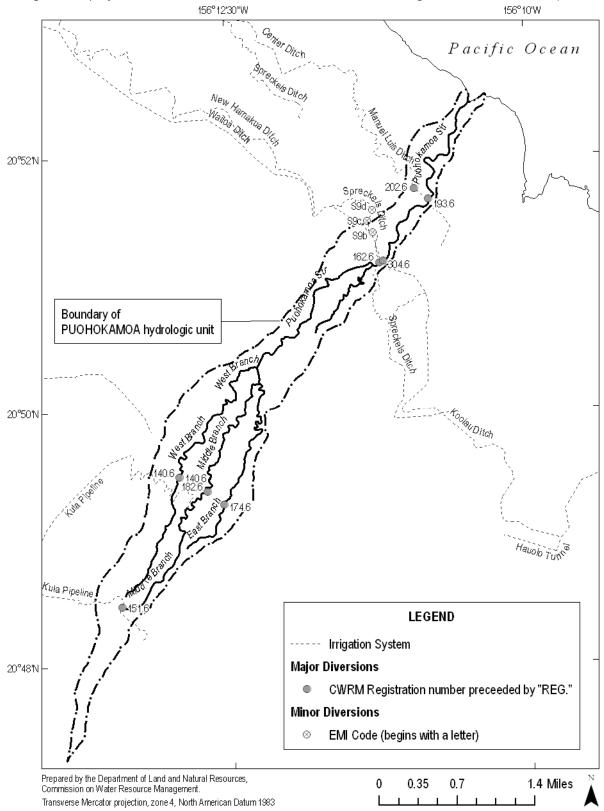


Figure 13-19. All registered diversions and EMI minor diversions identified in the Puohokamoa hydrologic unit (Source: East Maui Irrigation Company, 1970; State of Hawaii, Commission on Water Resource Management, 2008f; USGS 2001b).



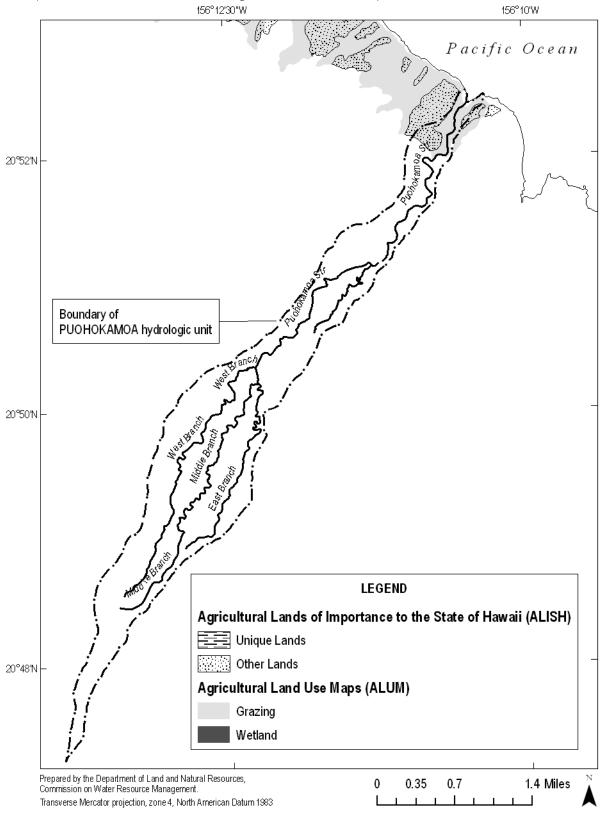


Figure 13-20. Potential agricultural land use for the Puohokamoa hydrologic unit based on the ALISH and ALUM classification systems (Source: State of Hawaii, Office of Planning, 1977; 1980; USGS 2001b).



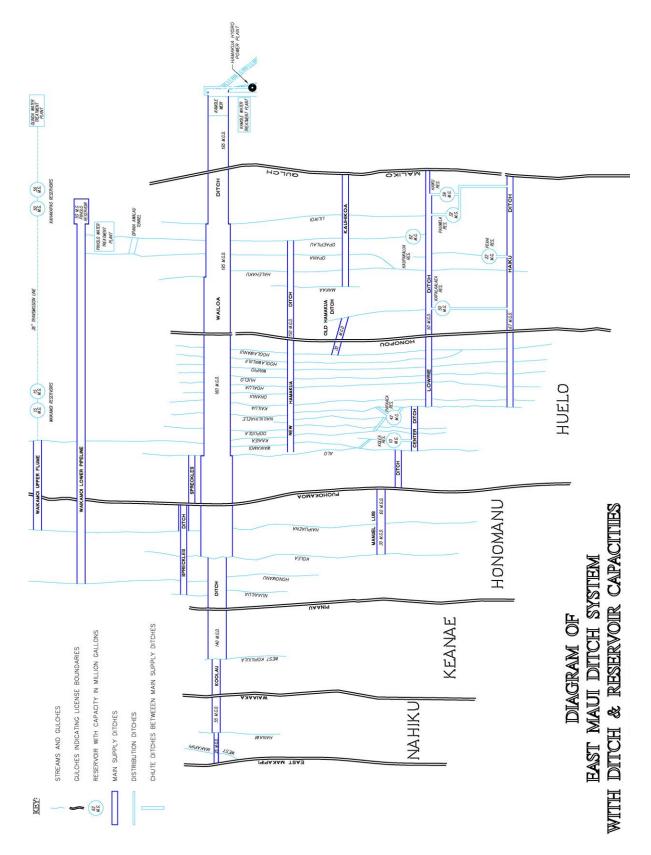

# 14.0 Bibliography

Alexander & Baldwin, Inc. (2009). Alexander & Baldwin, Inc., 2009 Annual Report, Form 10K, 13p.

Alexander & Baldwin, Inc. (2007). Alexander & Baldwin, Inc., 2006 Annual Report, Form 10K, 141 p.

Alexander & Baldwin, Inc. (2005). Alexander & Baldwin 2004 Annual Report, 126 p.

Alexander & Baldwin, Inc. (2003). Alexander & Baldwin 2002 Annual Report, 105 p.

Alexander & Baldwin, Inc. (2002). Alexander & Baldwin 2002 Annual Report, 101 p.

- Alexander & Baldwin, Inc. and Maui Electric Company, Limited. (1989). Amended and Restate Power Purchase Agreement between A & B-Hawaii, Inc. through its division, Hawaiian Commercial & Sugar Company and Maui Electric Company, Limited, 43 p.
- Amear, T., Chisholm I., Beecher, H., Locke, A., and 12 other authors. (2004). Instream flows for riverine resource stewardship, revised edition. Instream Flow Council, Cheyenne, WY, 268 p.
- Anthony, S.S., Hunt, Jr., C.D., Brasher, A.M.D., Miller, L.D., and Tomlinson, M.S. (2004). Water quality on the Island of Oahu, Hawaii, 1999-2001, U.S. Geological Survey Circular 1239, 37 p.
- C. Takumi Engineering, Inc. (2001). Preliminary Engineering Report for New Potable Water Source, Ke'anae Well No. 2 (State Well. No. 5108-02), Ke'anae, Maui, Hawaii. Prepared for County of Maui, Department of Water Supply.
- Clark, J.R.K. (1989). The beaches of Maui County (2nd ed.). Hawaii: University of Hawaii Press, 143 p.
- Consillio, K. (2008, September 11). Gay & Robinson to quit sugar. Retrieved July 2009, from Honolulu Star-Bulletin Web site: http://archives.starbulletin.com/2008/09/11/news/story03.html.
- Coral Reef Assessment and Monitoring Program. (2007). Maui Watershed Information. Hawaii Institute of Marine Biology, Hawaii Coral Reef Assessment and Monitoring Program. Retrieved January 2008, from http://cramp.wcc.hawaii.edu/Watershed Files/maui/WS Maui.htm.
- County of Maui. (2006). Neighbor Island Parcels: Maui Island. Retrieved February 2008, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/data/NIParcels.pdf
- County of Maui, Department of Water Supply. (2009). Instream Flow Standard Assessment Report Data Needs. Prepared for the Commission on Water Resource Management, Stream Protection and Management Division, 40p.
- County of Maui, Department of Water Supply. (2007a). Annual report for the fiscal year ended June 30, 2006, 80 p.
- County of Maui, Department of Water Supply. (2007b). Memorandum of Understanding Concerning Settlement of Water and Related Issues. Retrieved February 2008, from http://mauiwater.org/ ABMOU.htm

- County of Maui, Department of Water Supply. (2007c). Maui County Water Use and Development Plan, Candidate strategies, Upcountry District draft, 52 p. Retrieved February 2008, from http://mauiwater.org/UpcCandStrat070216.pdf
- County of Maui, Department of Water Supply. (2007d). Maui County Water Use and Development Plan, Water use and demand, Department of Water Supply systems, Draft, 75 p. Retrieved February 2008, from http://mauiwater.org/WUDPdraftDemand.pdf
- County of Maui, Department of Water Supply. (2007e). Your water in Maui County. Retrieved February 2008, from http://mauiwater.org/water.html.
- County of Maui, Department of Water Supply (1998). Final Environmental Assessment, Ke'anae Well No. 2, Ke'anae, Maui, Hawaii, TMK: (2) 1-1-04: 43. Prepared in consultation with C. Takumi Engineering, Inc.
- County of Maui, Department of Management, GIS Division. (2006). Maui County Roads. Retrieved February 2008, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/data/maui roads.txt
- County of Maui, Farm Bureau and Office of Economic Development. (2009). Maui Farmer and Rancher East Maui Water Use Survey Results. Prepared for the Commission on Water Resource Management, Stream Protection and Management Division, 25p.
- County of Maui, Planning Department. (2004). Digital Globe Imagery for Maui Island. [Restricted GIS data file]. Retrieved February 2008.
- County of Maui, Real Property Tax Division. (2008). Real Property Assessment Division Property Search. Retrieved January 2008 from http://www.mauipropertytax.com/Home.asp?mnu=Home.
- Cowardin, L.M., Carter, V., Golet, F.C., and LaRoe, E.T. (1979). Classification of wetlands and deeper habitats of the United States, U.S. Fish and Wildlife Service, Office of Biological Services, FWS/OBS-79/31, 131 p.
- DHM, Inc., Bishop Museum, Public Archaeology Section, Applied Research Group, and Moon, O'Connor, Tam and Yuen. (1990). Hawaiian fishpond study, Islands of Hawaii, Maui, Lanai and Kauai: Prepared for State of Hawaii, Office of State Planning, Coastal Zone Management Program, 196 p.
- Dingman, S. L. (1994). Physical Hydrology. New York: Macmillan College Publishing Company, 575 p.
- East Maui Irrigation Company. (1970). Map of East Maui Ditch System: Nahiku to Maliko. East Maui Irrigation Company, Ltd, Paia, Hawaii.
- East Maui Watershed Partnership. (2008). Retrieved February 2008, from http://www.eastmauiwatershed.org/.
- East Maui Watershed Partnership. (1993). East Maui Watershed Management Plan, 38 p.

- Ego, K. (1956). Life history of fresh water gobies. Project no. F-4-R. Fresh Water Game Fish Management Research, Department of Land and Natural Resources, Territory of Hawai'i, Honolulu, 24 p.
- Ekern, P.C., and Chang, J-H. (1985). Pan evaporation: State of Hawaii, 1894-1983. Hawaii Department of Land and Natural Resources, Division of Water and Land Development, Report R74, p.1-3, 38-48.
- Engott, J.A., and Vana, T.T. (2007). Effects of Agricultural Land-Use Changes and Rainfall on Ground-Water Recharge in Central and West Maui, Hawai'i, 1926–2004: U.S. Geological Survey Scientific Investigations Report 2007–5103, 56 p.
- Englund, R., and Filbert, R. (1997). Discovery of the native stream goby, *Lentipes concolor*, above Hawaii's highest waterfall, Hiilawe Falls. Bishop Museum Occasional Papers, v. 49, p. 62-64.
- Federal Emergency Management Agency. (2003). FEMA Flood Hazard Zones. Retrieved February 2008, from Hawaii State GIS Web site: http://hawaii.gov/dbedt/gis/data/dfirm\_metadata.htm
- Findings of Fact, Conclusions of Law, and Decision and Order of the Board of Land and Natural Resources in the Matter of the Contested Case Hearing Regarding Water Licenses at Honomanu, Keanae, Nahiku and Huelo, Maui. (2007). DLNR File No. 01-05-MA.
- Fitzsimons, J.M., and Nishimoto, R.T. (1990). Territories and site tenacity in males of the Hawaiian stream goby *Lentipes concolor* (Pisces: Gobbidae). Ichthyological Exploration of Freshwaters, v. 1, p. 185-189.
- Fletcher III, C.H., Grossman, E.E., Richmond, B.M., and Gibbs, A.E. (2002). Atlas of Natural Hazards in the Hawaiian Coastal Zone. U.S. Geological Survey, 7, 104, 109-110 p.
- Foote, K. (2009, July 8). Two Hawaiian Damselfly Species Proposed for Federal Protection. U.S. Fish & Wildlife Service News Release. Retrieved November 17, 2009 from http://www.fws.gov/news/newsreleases/.
- Ford, J.I., Carothers, S.W., and Kinzie, R.A. (2009). Status of Native Hawaiian Macrofauna in East Maui Streams and Biological Considerations for the Amendment of Interim Flow Standards in Selected Streams (IIFS). SWCA Environmental Consultants, updated June 2009, 47p.
- Freedman, C. (2009). Maui County Water Use and Development Plan, Upcountry District, Final Candidate Strategies Report – Upcountry Water Advisory Committee Review Draft. Haiku Design & Analysis, 130p.
- Fukunaga and Associates, Inc. (2006). Water Supply Improvements to the Kula Agricultural Park: preliminary Engineering Report. Prepared for County of Maui, Department of Economic Development.
- Giambelluca, T.W., Nullet, M.A., Ridgley, M.A., Eyre, P.R., Moncur, J.E.T., and Price, P. (1991). Drought in Hawaii. State of Hawaii, Department of Land and Natural Resources, Division of Water and Land Development, Report R88, 232 p.
- Giambelluca, T.W., Nullet, M.A., and Schroeder, T.A. (1986). Rainfall Atlas of Hawaii. State of Hawaii, Department of Land and Natural Resources, Division of Water and Land Development, Report R76, p. 47-59.

- Giambelluca, T.W., and Nullet, D. (1992). Evaporation at high elevations in Hawaii. Journal of Hydrology: 136, p. 219-235.
- Gingerich, S.B. (2005). Median and Low-Flow Characteristics for Streams under Natural and Diverted Conditions, Northeast Maui, Hawaii. U.S. Geological Survey, Scientific Investigations Report 2004-5262, 72 p.
- Gingerich, S.B. (1999a). Ground water and surface water in the Haiku area, East Maui, Hawaii: U.S. Geological Survey Water-Resources Investigations Report 98-4142, 29 p.
- Gingerich, S.B. (1999b). Ground water occurrence and contribution to streamflow, Northeast Maui, Hawaii: U.S. Geological Survey Water-Resources Investigations Report 99-4090, 70 p.
- Gingerich, S.B. and Oki, D.S. (2000). Ground Water in Hawaii. U.S. Geological Survey Fact Sheet 126-00.
- Gingerich, S.B., and Wolff, R.H. (2005). Effects of Surface-Water Diversions on Habitat Availability for Native Macrofauna, Northeast Maui, Hawaii. U.S. Geological Survey, Scientific Investigations Report 2005-5213, 93 p.
- Gingerich, S.B., Yeung, C.W., Ibarra, T.N., and Engott, J.A. (2007). Water use in wetland kalo cultivation in Hawai`i: U.S. Geological Survey Open-File Report 2007-1157, 68 p. [http://pubs.usgs.gov/of/2007/1157/]. Version 1.0, July 24, 2007, Revised Figure 36, p.
- Group 70 International, Inc., Davianna McGregor, Ph.D., and Cultural Surveys Hawaii, Inc. (1995). Kalo kanu o ka 'āina: A cultural landscape study of Ke'anae and Wailuanui, Island of Maui: Prepared for County of Maui, Planning Department, 275 p.
- Handy, E.S.C., Handy, E.G., and Pukui, M.K. (1972). Native Planters in Old Hawaii: Their Life, Lore, and Environment. Bishop Museum Press, Honolulu, Hawaii: Bernice P. Bishop Museum Bulletin 233, 676 p.
- Hao, S. (2007, May 1). Island pineapple canning will end. The Honolulu Advertiser. Retrieved February 2008, from http://the.honoluluadvertiser.com/article/2007/May/01/ln/FP705010361.html.
- Hawaiian Commercial & Sugar Company. (2009). Letter to Commission on Water Resource Management: East Maui Instream Flow Standard Assessment Reports. Hawaiian Commercial & Sugar Company, Alexander & Baldwim, Inc, 9p.
- Hawaiian Sugar Planters' Association. (1972). Sugar Manual 1972. Hawaiian Sugar Planters' Association, Honolulu, Hawaii, 47 p.
- Hawaii Gap Analysis Program. (2005). Maui Island Land Cover [GIS data layer]. Retrieved February 2008, from http://hbmp.hawaii.edu/.
- Hull, W.J. (1972). Report on Proposed Keanae License [for Board of Land and Natural Resources].
- Izuka, S.K., Oki, D.S., and Chen, C. (2005). Effects of irrigation and rainfall reduction on ground-water recharge in the Lihue Basin, Kauai, Hawaii: U.S. Geological Survey Scientific Investigations Report 2005-5146, 48 p.

- Jacobi, J.D. (1989). Vegetation Maps of the Upland Plant Communities on the Islands of Hawai'i, Maui, Moloka'i, and Lana'i, Technical Report Number 68. University of Hawaii at Manoa, Honolulu, Hawaii: Cooperative National Park Resources Studies Unit.
- Juvik, J.O., and Nullet, D. (1995). Relationships between rainfall, cloud-water interception, and canopy throughfall in a Hawaiian montane forest. In Hamilton, L.S., Juvik, J.O., and Scatena, F.N., (eds.), Tropical montane cloud forests: New York, Springer-Verlag, p. 165-182.
- Kaiser, B., Krause, N., Mecham, D., Wooley, J., and Roumasset, J. (n.d.). Environmental valuation and the Hawaiian economy: Introduction and executive summary, 140 p. Retrieved January 2008, from http://www.uhero.hawaii.edu/workingpaper/HawaiiEnviroEvaluation.pdf
- Kido, M. (1996). Recovery processes in Hawaiian streams, p. 76-93. In: Will stream restoration benefit freshwater, estuarine, and marine fisheries?: Proceedings of the October, 1994 Hawaii stream restoration symposium. State of Hawaii Department of Land and Natural Resources, Division of Aquatic Resources, Honolulu.
- Kikuchi, W.K. (1973). Hawaiian aquacultural system. Doctoral thesis, University of Arizona. Manuscript on file in the Bernice P. Bishop Museum Library, Honolulu.
- Kumu Pono Associates. (2001a). Wai o ke ola: He wahi moʻolelo no Maui Hikina, A collection of native traditions and historical accounts of the lands of Hāmākua Poko, Hāmākua Loa and Koʻolau, Maui Hikina (East Maui), Island of Maui: Prepared for East Maui Irrigation Company, 544 p.
- Kumu Pono Associates. (2001b). Wai o ke ola: He wahi moʻolelo no Maui Hikina, Oral history interviews with families of Hāmākua Poko, Hāmākua Loa and Koʻolau, East Maui: Prepared for East Maui Irrigation Company, 512 p.
- Kraftsow, Ellen. Personal communication. 23 Jun. 2008.
- Lau, L. S. and Mink, J. F. (2006). Hydrology of the Hawaiian Islands. Honolulu: University of Hawaii Press, 274 p.
- Martin, W.F. and Pierce, C.H. (1913). Water Resources of Hawaii 1909-1911 (US Geological Survey Water-Supply Paper 318). Washington, DC: U.S. Government Printing Office, 552 p.
- Maui Electric Company, Ltd. (2008a). HC&S Puunene Sugar Mill. Retrieved February 2008, from http://www.mauielectric.com.
- Maui Electric Company, Ltd. (2008b). Renewable energy: HC&S Wailoa Ditch hydropower. Retrieved February 2008, from http://www.mauielectric.com/portal/site/meco/.
- Maui Land and Pineapple Company, Inc. (2007). United States Securities and Exchange Commission, Form 10-K, 80 p.
- Maui Land and Pineapple Company, Inc. (2005). United States Securities and Exchange Commission, Form 10-K, 70 p.
- Maui Land and Pineapple Company, Inc. (2004). United States Securities and Exchange Commission, Form 10-K, 55 p.

- Maui Land and Pineapple Company, Inc. (2002). Maui Land and Pineapple Company, Inc., Annual Report 2001, 28 p.
- McRae, M.G. (2007). The potential for source-sink population dynamics in Hawaii's amphidromous species, p. 87-98. In: N.L. Evenhuis and J.M. Fitzsimons (ed.), Biology of Hawaiian streams and estuaries: Proceedings of the symposium on the biology of Hawaiian streams and estuaries. Bishop Museum Bulletin in Cultural and Environmental Studies, v. 3, Honolulu.
- Miyahira, Mike. Personal communication. 1 Aug. 2008.
- National Oceanic and Atmospheric Administration, Coastal Services Center. (2000). Maui 2000 land cover data. Retrieved December 2007, from http://www.csc.noaa.gov/crs/lca/hawaii.html.
- National Park Service. (2007). Haleakala National Park. Retrieved January 2008, from http://www.nps.gov/hale/.
- National Park Service, Hawaii Cooperative Park Service Unit. (1990). Hawaii Stream Assessment: A Preliminary Appraisal of Hawaii's Stream Resources: Prepared for State of Hawaii, Commission on Water Resource Management, Report R84, 294 p.
- Nature Conservancy of Hawaii. (2008). Waikamoi Preserve, Island of Maui. Retrieved January 2008, from http://www.nature.org/wherewework/northamerica/states/hawaii/preserves/art2358.html.
- National Drought Mitigation Center. (2009). Drought Monitor Statistics. Retrieved May 2009, from http://drought.unl.edu/dm/DM\_state.htm?HI.
- Nishimoto, R.T., and Kuamoo, D.G.K. (1997). Recruitment of goby postlarvae into Hakalau stream, Hawai'i Island. Micronesica, v. 30, p. 41-49.
- Nishimoto, R.T., and Kuamoo, D.G.K. (1991). The occurrence and distribution of the native goby (*Lentipes concolor*) in Hawai'i Island streams with notes on the distribution of the native goby species, p. 77-95. In: W. Devick (ed.), New directions in research, management and conservation of Hawaiian freshwater stream ecosystems: Proceedings of the 1990 symposium on stream biology and fisheries management. State of Hawaii Department of Land and Natural Resources, Division of Aquatic Resources, Honolulu.
- Nullet, D. (1987). Energy sources for evaporation on tropical islands. Physical Geography, 8: p. 36-45.
- Nullet, D., and Giambelluca, T.W. (1990). Winter evaporation on a mountain slope, Hawaii. Journal of Hydrology: 112, p. 257-265.
- Oki, D. (2004). Trends in Streamflow Characteristics at Long-Term Gaging Stations, Hawaii. U.S. Geological Survey, Scientific Investigations Report 2004-5080, 120 p.
- Oki, D. (2003). Surface Water in Hawaii. U.S. Geological Survey, Fact Sheet 045-03.
- OmniTrak Group Inc. (2007). Hawaii State Parks Survey: Prepared for Hawaii Tourism Authority, 98 p. Retrieved February 2008, from http://www.hawaiitourismauthority.org/ documents\_upload\_path/reports/HTAPRO-Report-12-01-2007.pdf

- Oxford University Press. (2003). A Dictionary of Earth Sciences (2nd Ed., reissued with corrections). A. Allaby and M. Allaby, Eds. New York: Oxford University Press, Inc.
- Pacific Disaster Center. (2007). Natural Hazards: Flood. Retrieved March 2008, from http://www.pdc.org/iweb/flood.jsp?subg=1.
- PBR Hawaii. (2004). Maui Island Plan: Prepared for State of Hawaii, Department of Hawaiian Home Lands, 340 p.
- Penn, D.C. (1997). Water and energy flows in Hawai'i taro pondfields: Honolulu, Hawaii, University of Hawaii at Manoa, Ph.D. dissertation, 376 p.
- Polhemus, A. and Asquith, A. (1996). Hawaiian Damselflies: A Field Identifation Guide. Bishop Museum Press, p. 4-16.
- Pukui, M.K., Elbert, S.H., and Mookini, E.T. (1974). Place Names of Hawaii (Revised and expanded edition). Honolulu: The University Press of Hawaii.
- Radtke, R.L., Kinzie III, R.A., and Folsom, S.D. (1988). Age at recruitment of Hawaiian freshwater gobies. Environmental Biology of Fishes, v. 23, p. 205-213.
- Rosenberry, D.O. and LaBaugh, J.W. (2008). Field techniques for estimating water fluzes between surface water and ground water. U.S. Geological Survey Techniques and Methods, 4-D2, 128p.
- Sanderson, M. (Ed.). (1993). Prevailing Trade Winds: Weather and Climate in Hawaii. Honolulu: University of Hawaii Press, 126 p.
- Scholl, M.A., Gingerich, S.B., and Tribble, G.W. (2002). The influence of microclimates and fog on stable isotope signatures used in interpretation of regional hydrology: East Maui, Hawaii. Journal of Hydrology, 264 (2002), p. 170-184.
- Scott, J.M., Mountainspring, S., Ramsey, and Kepler, C.B. (1986). Forest Bird Communities of the Hawaiian Islands: Their Dynamics, Ecology and Conservation. Studies in Avian Biology, No. 9, 431 p.
- Shade, P.J. (1999). Water budget of East Maui, Hawaii. U.S. Geological Survey Water-Resources Investigations Report 98-4159, 36 p.
- Sherrod, D.R., Hagstrum, J.T., McGeehin, J.P., Champion, D.E., and Trusdell, F.A. (2006). Distribution, <sup>14</sup>C Chronology, and paleomagnetism of latest Pleistocene and Holocene lava flows at Haleakala volcano, Island of Maui, Hawaii: A revision of lava-flow hazard zones: Journal of Geophysical Research, v. 111, B05205, doi: 10.1029/2005JB003876, 24p.
- Sherrod, D.R., Nishimitsu, Y., and Tagami, T. (2003). New K-Ar ages and the geologic evidence against rejuvenated-stage volcanism at Haleakala, East Maui, a post-shield-stage volcano of the Hawaiian island chain: Geological Society of America Bulletin, v. 115, no. 6, 683-694 p.
- Sherrod, D.R., Sinton, J.M., Watkins, S. E., and Brunt, K.M. (2007). Geological Map of the State of Hawaii: U.S. Geological Survey Open-File Report 2007-1089, 83 p., 8 plates, scales 1:100,000 and 1:250,000, with GIS database. U.S. Geological Survey.

- State of Hawaii, Commission on Water Resource Management. (2008a). Compilation of Public Review Comments, Hydrologic Units: Honopou (6034), Hanehoi (6037), Piinaau (6053), Waiokamilo (6055), Wailuanui (6056). Department of Land and Natural Resources, Commission on Water Resource Management, 798 p.
- State of Hawaii, Commission on Water Resource Management. (2008b). Draft Water Management Software to Estimate Crop Irrigation Requirement for Consumptive Use Permitting In Hawaii. Department of Land and Natural Resources, 61 p.
- State of Hawaii, Commission on Water Resource Management. (2008c). Hawaii Water Plan: Water Resource Protection Plan, Public review draft. Department of Land and Natural Resources, Commission on Water Resource Management, 557 p.
- State of Hawaii, Commission on Water Resource Management. (2008d). Well GIS data layer. Department of Land and Natural Resources, Commission on Water Resource Management.
- State of Hawaii, Commission on Water Resource Management. (2008e). Well index database [Database file]. Retrieved February 2008.
- State of Hawaii, Commission on Water Resource Management. (2008f). Surface water information management system, registration of stream diversion works database [Database file]. Retrieved February 2008.
- State of Hawaii, Commission on Water Resource Management. (2005a). Commission on Water Resource Management surface-water hydrologic units: A management tool for instream flow standards.
   Department of Land and Natural Resources, Commission on Water Resource Management, Report PR-2005-01, 111 p.
- State of Hawaii, Commission on Water Resource Management. (2005b). Hawaii Drought Plan 2005 Update. State of Hawaii, Department of Land and Natural Resources, Division of Water and Land Development, p. 1-1 to 5-4.
- State of Hawaii, Commission on Water Resource Management. (2005c). Surface-water hydrologic unit GIS data layer. Department of Land and Natural Resources, Commission on Water Resource Management.
- State of Hawaii, Department of Business, Economic Development and Tourism. (2008). Monthly economic indicators [Spreadsheet file]. Retrieved February 2008, from http://hawaii.gov/dbedt/info/ economic/data\_reports/mei/maui-r.xls.
- State of Hawaii, Department of Business, Economic Development and Tourism. (2007). 2006 State of Hawaii Data Book [Spreadsheet file]. Retrieved February 2008, from http://hawaii.gov/dbedt/info/economic/databook/db2006/section19.xls.
- State of Hawaii, Department of Agriculture. (2009a). Important Agricultural Land Fact Sheet. Retrieved November 2009 from http://hawaii.gov/hdoa/Info/ial/important-agricultural-lands.
- State of Hawaii, Department of Agriculture. (2009b). Instream Flow Standard Assessment Report Data Needs. Department of Agriculture, Agriculture Resource Management Division, 3p.

- State of Hawaii, Department of Health. (2004). Amendment and Compilation of Chapter 11-54, Hawaii Administrative Rules. Retrieved January 2008 from http://hawaii.gov/health/about/rules/ 11-54.pdf.
- State of Hawaii, Department of Health, Environmental Planning Office. (2007). 2006 State of Hawaii Water Quality Monitoring and Assessment Report: Integrated Report to the U.S. Environmental Protection Agency and The U.S. Congress Pursuant To Sections §303(D) and §305(B) Clean Water Act (P.L. 97-117). Retrieved January 2008 from http://hawaii.gov/health/environmental/ env-planning/wqm/wqm.html.
- State of Hawaii, Department of Health, Environmental Planning Office. (2004). Final 2004 List of Impaired Waters in Hawaii Prepared Under Clean Water Act §303(d). Retrieved January 2008 from http://hawaii.gov/health/ environmental/env-planning/wqm/wqm.html.
- State of Hawaii, Department of Health, Environmental Planning Office. (2001). Hawaii's Water Quality Standards: A Public Guide [brochure]. Retrieved January 2008 from http://hawaii.gov/health/environmental/env-planning/wqm/wqsbrochure.pdf.
- State of Hawaii, Department of Health, Environmental Planning Office. (1987). Water Quality Standards Map of the Island of Maui [map]. Retrieved January 2008, from http://hawaii.gov/health/environmental/water/cleanwater/wqsmaps/index.html.
- State of Hawaii, Department of Land and Natural Resources. (2005). Hawaii's Comprehensive Wildlife Conservation Strategy. Retrieved January 2008, from http://www.state.hi.us/dlnr/dofaw/cwcs/files/NAAT final CWCS/Full document Hawaii CWCS.pdf.
- State of Hawaii, Division of Aquatic Resources. (2009). Report on Puohokamoa Stream, Maui, Hawaii. Prepared for the State of Hawaii, Commission on Water Resource Management. Department of Land and Natural Resources, 30p.
- State of Hawaii, Division of Aquatic Resources. (1993). Native stream animals [Brochure].
- State of Hawaii, Division of Forestry and Wildlife. (2008a). Hawaii Forest Reserve System. Retrieved January 2008, from http://www.state.hi.us/dlnr/dofaw/frs/page2.htm.
- State of Hawaii, Division of Forestry and Wildlife. (2008b). Watershed Partnership Program. Retrieved February 2008, from http://www.state.hi.us/dlnr/dofaw/wpp/index.html
- State of Hawaii, Division of Forestry and Wildlife. (2003). Title 13, Chapter 123, Rules regulating game mammal hunting. Retrieved January 2008, from http://www.state.hi.us/dlnr/dofaw/hunting/MammalHuntingRegs\_Chap123.pdf
- State of Hawaii, Division of Forestry and Wildlife. (2002). Title 13, Chapter 122, Rules regulating game bird hunting, field trials and commercial shooting preserves. Retrieved January 2008, from http://www.state.hi.us/dlnr/dofaw/hunting/BirdHuntingRegs Chap122-02.pdf
- State of Hawaii, Division of State Parks. (2008). Maui's State Parks, Wailua Valley State Wayside. Retrieved January 2008, from http://www.hawaiistateparks.org/parks/maui/index.cfm?park\_id=42.
- State of Hawaii, Land Division (Department of Land and Natural Resources). (2008). File Review of the following files: GL 52A, GL 267, GL 475B, GL 520B, GL 538, GL 0658, GL 1706, GL 1982, GL

3349, GL 3505, GL 3578, GL 3695, RP 0279, RP 0763, RP 7185, RP 7263, RP 7264, RP 7265, RP 7266, Water Agreement Deed No 5876.

- State of Hawaii, Office of Planning. (2008). Conservation District Subzones [GIS data file]. Retrieved July 2008, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/cdsubzn.htm
- State of Hawaii, Office of Planning. (2007a). Historic land divisions (Ahupuaa) for the island of Maui [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/histlanddiv.htm
- State of Hawaii, Office of Planning. (2007b). Reserves [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/reserves.htm
- State of Hawaii, Office of Planning. (2007c). Soils [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/soils.htm
- State of Hawaii, Office of Planning. (2006a). Dams [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/dams.htm
- State of Hawaii, Office of Planning. (2006b). Aquifers [GIS data file]. Retrieved February, 2008 from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/dlnraq.htm
- State of Hawaii, Office of Planning. (2006c). Solar radiation [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/solarad.htm
- State of Hawaii, Office of Planning. (2006d). State land use district [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/slud.htm
- State of Hawaii, Office of Planning. (2005). Division of Aquatic Resources (DAR) stream [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/ gis/streams.htm
- State of Hawaii, Office of Planning. (2004a). Coastal resources [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/cstrsrc.htm
- State of Hawaii, Office of Planning. (2004b). Critical habitat [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/criticalhab.htm
- State of Hawaii, Office of Planning. (2004c). Ditches [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/ditches.htm
- State of Hawaii, Office of Planning. (2004d). Vegetation [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/veg.htm
- State of Hawaii, Office of Planning. (2003). National wetlands inventory [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/wetlnds.htm
- State of Hawaii, Office of Planning. (2002a). Elementary school districts [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Data Server.

- State of Hawaii, Office of Planning. (2002b). Hunting areas [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/huntareas.htm
- State of Hawaii, Office of Planning. (2002c). Na Ala Hele state trails and access system [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/ gis/nahtrails.htm
- State of Hawaii, Office of Planning. (2002d). Public school locations [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/pubschools.htm
- State of Hawaii, Office of Planning. (2002e). Water Quality Classifications [GIS data file]. Retrieved July 2008, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/classwater.htm
- State of Hawaii, Office of Planning. (1999). Parks [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/parks.htm
- State of Hawaii, Office of Planning. (1997). 100 foot contours [GIS data file]. Retrieved December 2008, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/cntrs100.htm
- State of Hawaii, Office of Planning. (1996.). Stream gauges [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/strmgage.htm
- State of Hawaii, Office of Planning. (1992). Threatened and endangered plants [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/teplant.htm
- State of Hawaii, Office of Planning. (1983). 500 foot contours [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/cntrs500.htm
- State of Hawaii, Office of Planning. (1980). Agricultural land use maps (ALUM) [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/ gis/alum.htm
- State of Hawaii, Office of Planning. (1977). Agricultural lands of importance to the State of Hawaii (ALISH) [GIS data file]. Retrieved December 2007, from Hawaii Statewide GIS Program Web site: http://hawaii.gov/dbedt/gis/alish.htm
- State of Nevada, Department of Conservation and Natural Resources, Division of Water Resources. (n.d.). Water words dictionary: Technical water, water quality, environmental, and water-related terms. Retrieved February 2008, from http://water.nv.gov/WaterPlanning/dict-1/ww-dictionary.pdf
- Stearns, H.T. (1985). Geology of the State of Hawaii, 2nd ed.: Palo Alto, Pacific Books, Publishers, 335 p.
- Stearns, H.T. and MacDonald, G.A. (1942). Geology and Ground-Water Resources of the Island of Maui, Hawaii. [Hawaii Division of Hydrography, Bulletin 7]. [In cooperation with the Geological Survey, United States Department of the Interior.]
- Trust for Public Land. (1998). East Maui resource inventory: Prepared for National Park Service, Rivers, Trails, and Conservation Assistance Program, with the assistance of Bay Pacific Consulting, 101 p.

- University of Hawaii. (2003). Drought Risk and Vulnerability Assessment and GIS Mapping Project. State of Hawaii, Department of Land and Natural Resources, Division of Water and Land Development, 157 p.
- U. S. Department of Agriculture, Natural Resources Conservation Service, Conservation Engineering Division. (1986). Appendix A: Hydrologic Soil Groups. Urban Hydrology for Small Watersheds. (Technical Release 55.) Retrieved December 26, 2007 from http://www.info.usda.gov/CED/ftp/CED/tr55.pdf
- U.S. Department of Agriculture, Natural Resource Conservation Service. (1996). Handbook Notice #38. Irrigation estimation maps for Hawaii.
- U.S. Department of Agriculture, Soils Conservation Service. [In cooperation with The University of Hawaii Agriculture Experiment Station.] (1972). Soil Survey of Islands of Kauai, Oahu, Maui, Molokai, and Lanai, State of Hawaii. Washington, DC: U.S. Government Printing Office.
- U.S. Environmental Protection Agency. (2008). "Impaired Waters and Total Maximum Daily Loads." Retrieved April 23, 2008 from http://www.epa.gov/owow/tmdl/intro.html
- U.S. Environmental Protection Agency, Region 9, and State of Hawaii, Department of Health. (2002). Revisions to total maximum daily loads for the Ala Wai Canal, Island of Oahu, Hawaii. Retrieved February 2008, from http://hawaii.gov/health/environmental/env-planning/wqm/awtmdlfinal.pdf
- U.S. Fish and Wildlife Service. (2002a). Critical habitat for 61 plant species from Maui and Kahoolawe. Retrieved December 2007, from http://www.fws.gov/pacificislands/CHRules/Maui.reproposal.fs.pdf
- U.S. Fish and Wildlife Service. (2002b). Draft economic impact analysis of proposed critical habitat for threatened and endangered plants on the Island of Hawai'i. Retrieved December 2007, from http://www.fws.gov/pacificislands/CHRules/bigislandplantsEA1202.pdf
- U.S. Fish and Wildlife Service. (2002c). Supplemental economic impact analysis of proposed critical habitat for the Maui plants. Retrieved December 2007, from http://www.fws.gov/pacificislands/ CHRules/mauisuppea.pdf
- U.S. Geological Survey. (2007). Geologic Map of the State of Hawaii. [With GIS database.] (Open File Report 2007-1089). Reston, VA: D.S. Sherrod, J.M. Sinton, S.E. Watkins, and K.M. Brunt.
- U.S. Geological Survey. (2001a). Digital elevation model (DEM) 10 meter. Retrieved December 2007, from http://data.geocomm.com/dem/.
- U.S. Geological Survey. (2001b). National Hydrography Dataset (NHD). Retrieved December 2008, from http://nhd.usgs.gov/.
- U.S. Geological Survey. (1996). Digital raster graphics (DRG) data. Retrieved December 2007, from http://data.geocomm.com/drg/index.html.
- W.A. Hirai & Associates, Inc. (1981). Hydroelectric Power in Hawaii: A Reconnaissance Survey: Prepared for State of Hawaii, Department of Planning and Economic Development and U.S. Department of Energy, 199 p.

- Wilcox, C. (1996). Sugar water: Hawaii's plantation ditches: Honolulu, University of Hawaii Press, 191 p.
- Wilson Okamoto & Associates, Inc. (1983). Instream Use Study, Windward Oahu: Prepared for State of Hawaii, Division of Water and Land Development, Report R68, 154 p.
- Ziegler, A.C. (2002). Hawaiian natural history, ecology, and evolution. Honolulu: University of Hawaii Press, 477 p.

# 15.0 Appendices

Appendix A Petition to Amend Interim Instream Flow Standards. Puohokamoa Stream, East Maui. State of Hawaii, Department of Land and Natural Resources, Commission on Water Resource Management.

# Appendix A

						IMISSI artment								
	51 <b>, ,</b> , %	2112	0	₽3:	<i>2</i> ' 3					n V		24 P	3:10	
		F	PET	ITIO	A OT A	MEND	INTER	IM IN	STRE	AM FL	.ow s	STAND	ARDS	
_					est, Mi			_					· • • 1	
Box (	621, Honol	lulu, Hi	awaii	96809.	r type and s Petition mus not accept	it be accon	spanied b	y a non-r	ofundable	filing fee a	of \$25.00 i	oavabie io	the Dect. o	Management. I Land and N
1.	Co	m/Nar ntact F	ne Persor	n <u>Al</u> a	<u>an Mural</u>	kami, A	ttorne	зу	_	Ph:	521-2	<u>ian Le</u> 2302	gal Cor	poration
2.	STREA	MFL	ow	DATA	165470	00 (W) 00, 16	, 1654 546000	5000,	16539		654150	i), Da	ata to	
	Loc	ation/	React	n <u>SE</u> F	Antion 165	IED		map sho	wing diver		iod of Rec	SEF	iges Ina ATTACH	
		3LE 1.			OF RECOR									
	Jan		Feb	Mar		May	Jun	Jut	Aug	Sep	Oct	Nov	Dec	Annual
		<u> </u>			· · · · · · · · ·									
	SE	Е АТ	TAC	HED	STREAM	IFLOW D	ΑΤΑ ΤΑ	BLES	TO FOL	LOW.		· · · · · · · · · · · · · · · · · · ·		
											A	incual Me	dian flow in	cts =
	TAB	BLE 2.	P	ROPOS	ED AVERA	GE MONTH	ILY STRE	AMFLOW	DIVERSI	ON FROM	AFFECT	ED STRE	AM REACH,	IN CFS
	Jan		Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
	NC	ONE.	11	NDETE	RMINED;	SUFET		<b>ΕΩΡ</b> Τ	Δ <b>ρ</b> Λ Γ/					
	NC	INE.	0		.MATHED,	JUITI	GILNI	IUKI		INP THG			dian flow in	
														<b>CIB</b> -
	TAB	NLE 3.	A	VERAGI		STREAM	FLOW IN	AFFECT	ED STRE	M REACT		RESTOR/		ese flow), IN
	Jan		Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annua
	NA	TURA	AL S	TREAM	IFLOW EX	CEPT F	OR EXE	RCISE	OF AF	PURTEN				
l.		NG II				STREAM	I WATE	R USE:			-		ectan flow ir H	1 CTS =
				OWNER	· · ·				×					
	R	<u>esea</u>	RCH	IN PI	ROGRESS.	••••••								
											<u></u>	<u></u>		
				<u></u>										
				(	iqe arrow It)	ice le nece	esary, att	ach an e	dended I	et followin	g above l	orm <b>at)</b>		
								SIS FO	R SUCH		TS:			
<b>.</b>	ANTICI	PATE	ED IN	<b>IPAC</b>	IS ON ST	REAM A								
ŀ.											D BENE	FICIAL	יקווקסא	TIN A NIT
ŀ.	RESTO	RATI	LON		STREAM			TAT A	ND BIO	TA. AN	D <u>BENE</u>	FICIAI	APPUR	<u>FENANT</u>
ŀ.	RESTO	RATI	LON	OF IN	STREAM			TAT A	ND BIO	TA. AN	D BENE	FICIAI	APPUR	<u>TENANT</u>
ŀ.	RESTO	RATI	LON	OF IN	STREAM			TAT A	ND BTO	TA, AN	D <u>BENE</u>	FICIAI	APPUR1	
ŀ.	RESTO	RATI	LON	OF IN	STREAM			TAT A	ND BIO	TA. AN	D BENE	FICIAI	APPUR1	
ŀ.	RESTO	RATI	LON	OF IN	STREAM S.	NATURAI	<u>HABI</u>						. APPURT	
÷.	RESTO	RATI	LON	OF IN	STREAM S.		. HABI	locumen	tation, pla	uns, letters	. etc.)	FICIAI	. APPURT	

•

١

Date Received

Attorney for Na Moku 'Aupuni o Ko'olau Hui

#### Puohokamoa Stream

Puohokamoa Stream splits into three main branches at 2,100 ft altitude; the longest is the middle branch that is headed at 4,400 ft altitude 6.4 mi inland (plate 1). The stream rises steeply from sea level to 600 ft altitude 0.6 mi from the coast (a gradient of 930 ft/mi) and at this altitude the stream valley is incised 200 ft below the upland surface. With the exception of 3,000 ft of Honomanu Basalt at the coast, this stream lies on lava flows of the Kula Volcanics along most of its length (Stearns and Macdonald, 1942). Streamflow is captured by five of the surface-water diversion systems (table 4).

Puohokamoa Stream was never dry during 1913– 71 at gaging station 5450 at 1,322 ft altitude (table 2, plate 1). At the gaging stations at about 2,800 ft altitude on the three stream branches, streamflow was perennial in the west (station 5440) and middle (station 5430) branches but went dry in the shorter east (station 5420) branch during 1919–27 when the gaging stations were operated concurrently. Base-flow estimates from longterm streamflow records indicate that the average annual gains from ground water are about 5.46 Mgal/d upstream of 1,322 ft altitude, 2.8 Mgal/d of this flow is gained downstream of 2,800 ft altitude (table 2, fig. 15I).

Several sets of streamflow measurements in sections of the stream branches also show continuous streamflow gains upstream of 1,300 ft altitude (table 12). Measurements were made some time in the 1920's between 2,050 and 1,300 ft altitude that show a gain of about 0.6 Mgal/d (written commun. from J.H. Hofmann to J.H. Foss, November 17, 1932 in USGS Hawaii District files). Streamflow data from February 3, 1920 confirm this pattern (table 12). Measurements were also made on October 29-30, 1932 and June 12, 1933 between 2,900 ft and 2,400 ft altitude during base-flow conditions that show gains of about 0.1 Mgal/d in the east and west branches and a slight loss of about 0.05 Mgal/d in the middle branch (Hofmann, 1934). The latter measurement represents only a 15 percent difference between the upstream and downstream measurements; therefore, this value is probably about the same magnitude as the measurement error inherent in the method used in that particular study. Four measurements were made on April 10, 1962, three on the middle branch

between 3,200 ft and 2,900 ft altitude and one on the west branch at 2,850 ft altitude (U.S. Geological Survey, undated [a]). These measurements show a gain of about 0.2 Mgal/d in the middle branch. A measurement made in March 1928 by EMI shows a gain of about 0.1 Mgal/d between 900 ft and 500 ft altitude (table 10). No measurements were made where the stream flows over the Honomanu Basalt. No water budget was calculated for the Puohokamoa Stream subbasin.

### Streamflow

Estimates of streamflow and base flow are based on streamflow records of varying length and from different times. The error associated with comparing these records is not considered significant because the average annual values used in the comparisons are expected to be within about 10 percent of the true value in most cases. A statistical analysis of five streamflow records, each with more than 60 years of record, shows that the average annual discharge for any 10-year period within that record has a standard error of 12 percent when compared with the whole record (Fontaine, 1996). When the length of the subset is increased to a 50-year period, the standard error only improves to 5 percent. Thirty nine of the streamflow records for the study area are equal to or greater than 10 years long.

For this study, the length of the period of record at each gaging station was determined to be unimportant by comparing each record to three reference records from the study area. The three longest streamflow records, 5080 (73 years), 5180 (76 years), and 5870 (85 years) were chosen as reference records. For each other individual record, a time period equal to the length of that record was chosen. A subset of a reference record was then selected from this same time period and the average flow during that time period was compared with the total reference record to estimate the ratio of flow during the subset period to the reference period. This analysis was made for all three reference records and the result was averaged to obtain a period-of-record scale factor for each of the other records. The scale factor ranged from 0.88 to 1.13 (table 2). This variability is consistent with the statistical analysis reported by Fontaine (1996). This range of accuracy is considered sufficient for the type of comparisons made in this study, and therefore, no corrections were made to any of the records to account for differences in length or period of record.

### Table 12. Streamflow in Puohokamoa Stream, northeast Maui, Hawaii

,

....

[ft, feet; Mgal/d, million gallons per day; all altitudes estimated from U.S. Geological Survey topographic maps, Haiku, Keanae, Kilohana, and Nahiku quadrangles; 1920 flow data from Hofmann; written commun. to Foss, 11/17/32, in U.S. Geological Survey Hawaii District files and daily-discharge data from Grover and Stewart (1924); 1932 and 1933 flow data from Hofmann (1934) and daily-discharge data from Grover and Carson (1935); all 1962 data from U.S. Geological Survey (undated[a]); 1963 daily-discharge data from U.S. Geological Survey (undated[b]); gaging-station number is preceded by 16 and ends in 00]

Station number	Stream name	Altitude (ft)	Date	Streamflow (Mgal/d)	Comments
5450	Puohokamoa	1,322	1920	1.60	Daily mean at gaging station; upstream of
			2/3/20	1.60	Spreckels Ditch diversion
			10/29/32	1.20	
			10/30/32	1.70	
			6/12/33	2.60	
			4/10/62 4/11/63	3.62 2.59	
Dunhalanaa 11	Destations	1.600		1.53	
Puohokamoa 11	Puohokamoa	1,500	1920		
Puohokamoa 12	Puohokamoa	1,650	1920	1.49	
Puohokamoa 13	Puohokamoa	1,900	1920	1.20	
Puohokamoa 14	Puohokamoa	2,050	1920	0.96	
Puohokamoa 19	West Branch Puohokamoa	2,440	10/30/32	0.40	
5440	West Branch	2,800	2/3/20	0.40	Daily mean at gaging station
	Puohokamoa		10/30/32	0.36	
			4/11/63	0.21	
Puohokamoa 21	West Branch Puohokamoa	2,850	4/10/62	0.28	
Puohokamoa 29	Middle Branch Puohokamoa	2,400	6/12/33	0.26	
5430	Middle Branch	2,900	2/3/20	0.20	Daily mean at gaging station
	Puohokamoa		6/12/33	0.31	
			4/10/62	0.32	
			4/11/63	0.15	
Puohokamoa 31	Middle Branch Puohokamoa	3,080	4/10/62	0.28	
Puohokamoa 32	Middle Branch Puohokamoa	3,200	4/10/62	0.14	
Puohokamoa 39	East Branch Puohokamoa	2,460	10/29/32	0.25	
5420	East Branch	2,800	2/3/20	0.05	Daily mean at gaging station
	Puohokamoa		10/29/32	0.14	
			4/11/63	0.13	

### РИОНОКАМОА

STATION ID - 16542000 E B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN .

ł

### DURATION TABLE OF DAILY VALUES FOR PERIOD OCT TO SEP


СГ 1110080765423217 1210087654232178 80		WATER YEAR RANGE 1921 1921 1922 1922 1923 1923 1923 1923	CLASS
VALUE 0.00 0.07 0.07 0.09 0.11 0.13 0.13 0.13 0.23 0.23 0.34	1925 1 1926 1932		1 2
HOT 2 2 2 0 2 0 2 0 5 0 3 5 6 2 0 5		1 6 1	3
ACCUM 25557 25555 25554 25554 2531 2433 2433 2433 2433 2433 2433	μυ	17 43 25	567
PERCT 100.000 99.92 99.88 99.65 95.15 95.15 95.15 87.13 87.13			6 8
	250	→ ₩ ₩ ₩ π # 7 #	10 11
CL 12 13 14 15 15 15 16 19 20 21 22 22 22 22 22 22 22 22 22 22 22 22	42 42 129 23	л 1 4 4 0 5 6 2	12 13
VALUE 0.511 0.511 0.51 0.91 1.10 1.30 2.00 2.00 2.90 2.90 3.50 3.50		59 NUMB	14 15
_		NUMBER OF 0 38 15 8 25 27 1 57 49 9 43 17	5 16
TOTAL 357 239 180 258 193 193 112 112 75 64 41		7 DAYS 33 26 41 26	17
ACCUM 1872 1872 1515 1276 1096 6458 6458 558 446 302 302 238	4 2 4 4 3 6	17 17 17	18
00140000000000000000000000000000000000	23 8 4 <sup>1</sup>	CLASS 6 7 10	19
PERCT 73.21 73.21 73.21 73.21 49.90 49.90 42.86 42.86 42.86 42.82 21.82 21.82 21.82 21.44 11.82 11.82 3.21 3.21 3.21 3.21 3.21 3.21 3.21 3.2			20
нччюо <i>о</i> сидачч		112 112 11 11 11 11 11 11 11 11 11 11 11	21 22
		0 0 1 8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	2 23
CLASS 25 26 27 28 29 30 31 31 32 32 32 32 32 33	ц	C 4 10 4	24
	و د <i>د</i>	പംപര	25
VALUE 5.20 7.66 9.30 11.00 14.00 14.00 127.00 224.00 30.00 30.00	ov (A 44	ω μ× Ν σι	26
TOT		u u u u u u u u u u	27 28
1111222333 222307 23084564807 23084564807		こるよる	29 3
ACCUM 1297 1300 1302 102 52 52 37 23 15 23 23 23 23 23 23 23 23 23 23 23 23 23	6 1, 1 3 2	н с,	0 31 32
PER 7 - 70 5.08 3.99 2.00 2.00 0.20 0.20 0.20 0.20 0.20 0	L 5	1 0 F 2 2 4 2 7 2 2	33 34
	н	ц	ຜ ປ

CODDETITEM OF CODE	COEFFICIENT OF VARIATION	STANDARD DEVIATION OF LOGS	MEAN OF LOGS = 0.00908	5.0	10.0	15.0	20.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0	EQUALED OR EXCEEDED	PERCENT OF TIME VALUE	NUMBER OF VALUES = 19 (NU) LISTING OF DATA FOLLOWS:	ADDITIONAL CONDITIONS FOR THIS RUN STATISTICS ARE BASED ON LOGARITHMS NUMBER OF VALUES IS REDUCED FOR EAC	DURATION DATA VALUES ARE II DATA ARE NOT ANALYTICI AND THE USER IS RESPO	DURATION CURVE STATISTICAL STATION ID: 16542000 PARAMETER CODE = 00060 STATISTIC CODE - 00003 MI
1 0 601 0 g	= 41.28006	<ul> <li>0.37473 (VARIABILITY INDEX - SEE USGS WSP 1542-A)</li> </ul>		(LOG =	(LOG =	(LOG =	1.63  (LUS = 0.21L24)	(Log =	(LOG =	= 50T)	(LOG =	0.91 (LOG = $-0.04176$ )	(LOG =	0.74 (LOG = $-0.12932$ )	0.69 (LOG = $-0.15968$ )	(LOG =	(LOG =	(LOG =	(LOG =	2 (LOG =	8 (LOG =	VALUE	DATA	(NUMBER OF NEAR-ZERO VALUES = 0) :	CHIS RUN ARE: 3ARITHMS (BASE 10). 9 FOR EACH NEAR-ZERO OR ZERO VALUE.	JES ARE INTERPOLATED FROM DURATION TABLE: ANALYTICALLY FITTED TO A PARTICULAR STATISTICAL DISTRIBUTION, IS RESPONSIBLE FOR ASSESSMENT AND INTERPRETATION.	AL CHARACTERISTICS FOR E B PUCHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI MEAN

·

•

COEFFICIENT OF SKEW = 0.69188

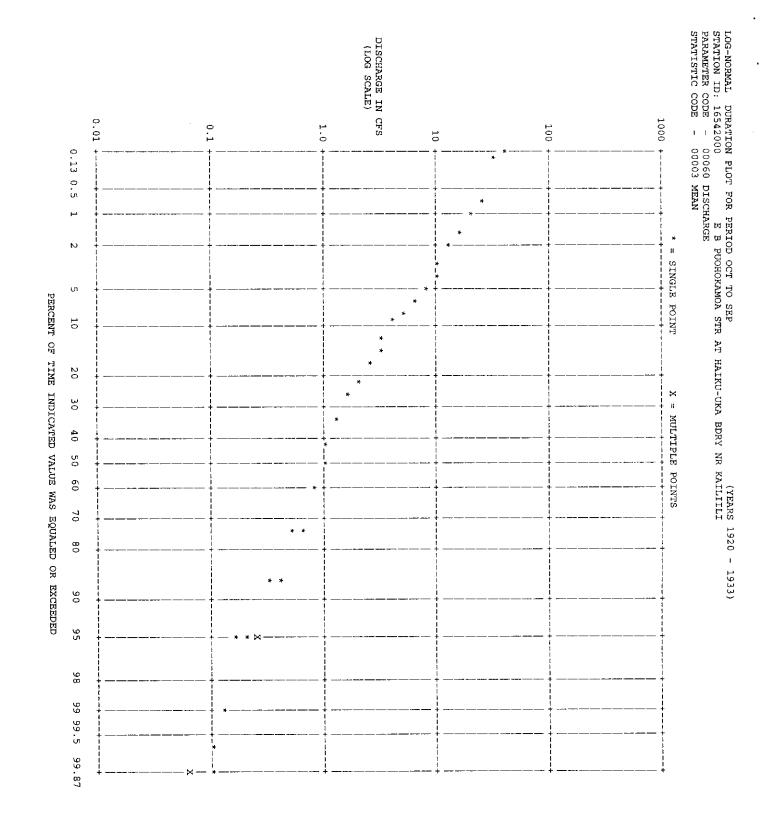

STATION ID - 16542000 E B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS

	Ę
	NTURNEY A
	10 10 10 10
FOR	TATATATATAT
FOR PERIOD OCT TO SEP	011 T 110
D OCT .	* 0 E E C
TO SEP	01110 11
-	10110111
	¢
	The second second second to the test of the second se
	ł

1932 1932		WATER YEAR 1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925
.15	.31	1 .080 .15 .0000 .0000
6	7	らゆらくる
	.31	3 .087 .15 .26 .15 .20
7	σ	するらるよ
.46 7	.33 6	7 .096 .15 .29 .15 .29 .26 4
7	n	чилич
		14 .11 .15 .30 .32
7	თ	らるもので
		30 .12 .19 .31 .31
7	U1	9 4 W N H
1.10	.57	60 .25 .25 .97 62 .89 52 53 53
7	4	ч и д и и и
		90 .46 .42 1.06 1.10
7	ω	σφυ⊬Ν
1.73	.71	120 .80 .52 1.11 .80 1.49
Ţ	2	ക്പനനം
2.31	.75	183 1.08 .84 1.24 1.24 2.11
Ţ	ч	0 4 0 V 4 0

STATION ID - 16542000 E B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN \*

HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1932 1932	1926 1926	WATER YEAR RANGE 1921 1921 1922 1922 1923 1923 1924 1924 1925 1925
23.0 6	13.0 7	20 32 34 40 50 24 40 50 24 35 40 50 40 50 40 50 50 50 50 50 50 50 50 50 5
12.7 6	6.90 7	3 15.9 25.7 21.7 22.8 22.8 28 22.8 22.8 22.8
8.50 6	3.91 7	7 9.69 18.6 19.6 10.9 11.6 3
7.03 5	2.83 7	15 8.11 11.2 11.3 11.3 8.50 3
4.98 5	2.44 7	30 5.28 6.25 3.89 6.26 3.89 6 2.6 3.89 6 2.6 3.89 6 2.6 3.89 6 2.6 3.89 6 3.89 6 2.6 3.6 5.26 3.6 7.16 7.16 7.16 7.16 7.16 7.16 7.16 7.
3.61 5	1.60 7	60 3.78 6.42 3.92 3.92 3.09 6.457 2
3.63 3	1.41 7	90 3.18 5.45 3.23 2.64 6.45 2.64 6.45 2.64 6.25 2.95 2.95
3.45 3	1.24 7	120 2.69 6.29 2.75 2.75 2.56 5 3.47 2
3.02 3	1.10 7	183 2.33 4.63 2.28 2.28 2.11 3.07 2

STATION ID - 16542000 E B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN .

.

### ANNUAL AND/OR SEMI-ANNUAL VALUES

STATION ID - 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

.

.

### DURATION TABLE OF DAILY VALUES

CL 22 22 22 22 22 22 22 22 22 22 22 22 22	1966 1966 1967 1967 1968 1968	1963 1963 1964 1964 1965 1965	1933 1933	1926 1926	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925	WATER YEAR RANGE 1920 1920	CLASS	
VALUE 0.00 0.00 0.08 0.19 0.15 0.15 0.15 0.15 0.23 0.23 0.23 0.23 0.23	ω \ 0 ω	0 <b>1</b> 2 0	ω	o	40040	O AR	1 2	
TOT≯L 24 58 105 242 105 242 242 385 385 340	7 5 16 1	11 35 2 1				ω	з 4	
ACCUM 51114 5105 5105 51081 5023 4962 4866 4866 48677 4435 4435 44350	6 4 12 33 8 15 12 10	22 9 19 3 18 11 8 10		U		ເມ ບາ	567	
PERCT 100.00 100.00 99.82 97.16 97.16 97.16 91.45 85.03 91.45 85.03	14 20 32 19 23 15	19 20 11 8 7 12	u	59	14 9	61	8 9	
	17 18 13	14 12	ω				10	
	19 28 13	$11 \\ 13 \\ 21 \\ 13 \\ 13 \\ 13 \\ 13 \\ 13 \\ $	ភ្វ	64	4 C C 4 8 4 4	46	11	
CLASS 113 15 15 16 16 19 22 21 22 22 22 22 22 22 22 22 22 22 22	225 12	$\begin{array}{c}10\\23\\16\end{array}$	49	ω 8	20 25 25 25	28	12	
201 - 101 -	46 146	16 21 40	39	20	27 27 28 21	20	13	ğ
× 400444000	$14 \\ 12 \\ 11$	7 12 15	42	29	3 3 3 4 4 3 5 5 5 7	19 N	14	JRAT
VALUE 0.92 1.10 1.50 2.380 2.380 2.380 2.380 2.50 3.60 5.70 5.70	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	40 40	51	ω 8	57864 578824	NUMBER 9 45	15	POR
TO	11 13 13	21 23 27	22	16	230666 2306	R OF 16	16	PABL: PERI
ТОПА 296 342 319 326 326 326 326 326 187 205 187 183 183 128	205	342 352	16	23	22422 22227	DAYS 15	17	DD OF
АС 1112223 111223	212 252	221 24	19	28	2 2 3 3 2 2 8 7 1 8 5	S IN 17	18	DAI CT T
ACCUM 3630 22992 20232 20232 1647 1321 1134 1134 1134 508	112 125	15 15 7	10	11	121222 20041 2006	CLAS	19	DURATION TABLE OF DAILY VALUES FOR PERIOD OCT TO SEP
rrondanooraaa Hoaanooraaao	12 12 12	111 105 105	ω	œ	8 1 1 1 2 1 8 1 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1	16	20	ALUE P
PERCT 70.98 64.29 58.51 39.56 39.58 39.58 39.58 39.58 32.21 12.22 118.17 118.17 12.08	13 20	112	9	4	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Q	21	0
	15	1 1 1 1 4 6 1	00	س	22 14 10	4	22	
	0 4 0	0 0 0 0 0	10	N	10 13 13	س	23	
CLAS 2020 2020 2020 2020 2020 2020 2020 20	ц	e-10	- თ	4	2950 2950	- н	24	
ຂ ຂ	345 15	17 12 3	ы. 10	 ω	н росоч Сосоч	ι.	25	
VALUE 11.00 122.00 22.00 28.00 35.00 35.00 55.00 69.00 87.00 87.00		L					N	
00000000000000000000000000000000000000	4000	49 1	σι	ч	<b>してして</b>	ω	6 2	
Р 100 100 100 100 100 100 100 100 100 10	6 9 9 6 9 1	៴៰៰	μ ω	4 4	9949049 90049	1 2	7 28	
ACSSARSARSALT JOSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSSS	Nυτω	44	N	N	บพปปล	N	29	
AC	$\omega$ N N	ωN		ω	ωρνον	ц	30	
4300 3250 2430 1920 134 134 134 134 134 134 16 31	$\mapsto$	μ ω			40 WH	Ч	31	
H		N	Ч		з 1 <sub>7</sub> 1		32 3	
9)ERCT 4.636 1.652 0.257 1.652 0.2577 0.257 0.25777 0.2577 0.2577 0.25777 0.25777 0.25777 0.25777 0.25777 0.25777 0.257777 0.257777 0.25777777 0.25777777777777777777777777777777777777					NNNUH	-	ω ω	
одннудуранд					ЧЧЧ		435	

PERCENT OF TIME VALUE EQUALED OR EXCEEDED ADDITIONAL CONDITIONS FOR THIS RUN ARE: STATISTICS ARE BASED ON LOGARITHMS (BASE 10). NUMBER OF VALUES IS REDUCED FOR EACH NEAR-ZERO OR ZERO VALUE. DURATION DATA VALUES ARE INTERPOLATED FROM DURATION TABLE: DATA ARE NOT ANALYTICALLY FITTED TO A PARTICULAR STATISTICAL DISTRIBUTION, AND THE USER IS RESPONSIBLE FOR ASSESSMENT AND INTERPRETATION. STANDARD DEVIATION OF LOGS = MEAN OF LOGS = 0.17073LISTING OF DATA FOLLOWS : NUMBER OF VALUES = 19 (NUMBER OF NEAR-ZERO VALUES = PARAMETER CODE = 00060 STATISTIC CODE - 00003 MEAN DURATION CURVE STATISTICAL CHARACTERISTICS FOR ... STATION ID: 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI 
 99

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90

 90


 90

 90

 90
 </tr DATA VALUE 0.49630 (VARIABILITY INDEX - SEE USGS WSP 1542-A) 11 п 11 П U 11 u IJ u n н n 11 н 11 n n 11 п -0.50225) -0.33632) -0.26622) -0.19427) -0.12039) -0.04578) 0.13599) 0.18703) 0.25011) 0.32428) 0.39926) 0.39926) 0.48559) 0.48559) 0.61153) 0.74520) 0.94667) -0.71923)0.02265) 0.08291) 1.23707 0

COEFFICIENT OF VARIATION Ħ 2.90697

COEFFICIENT OF SKEW п 0.35116

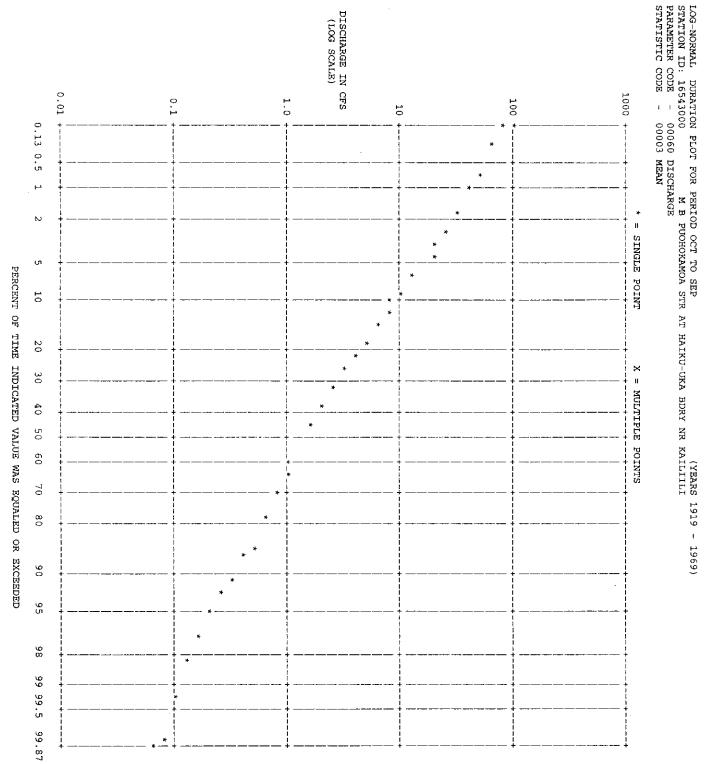

# STATION ID - 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

•

# LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1966 1966 1967 1967 1968 1968		1933 1933	1926 1926	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925	WATER YEAR RANGE 1920 1920
.090 4 .16 8 .070 2	.060 1 .15 7 .12 5	.31 11	.15 6	.31 9 .31 10 .46 12 .46 13 .46 14	1 .080 3
.090 4 .16 7 .073 2	.060 .16 .12 .5	.31 11	.15 6	.31 .31 19 .46 12 .51 14 .46 13	.080 3
.11 4 .16 6 .099 3		.35 10	.20 8	.42 11 .31 19 .53 13 .60 14 .46 12	7 .090 2
.18 6 .17 4 .15 3		.43 10	.25 8	.46 11 .34 9 .55 12 .61 14 .57 13	
.23 .22 .22 5		.57 11		.49 .49 .86 13 .89 14 .89 14	30 .15 2
	.46 2 1.07 10 1.07 11	-77 6		.83 7 .72 3 2.02 14 1.43 13 1.41 12	60 . <b>4</b> 0 1
	.75 1 1.32 8 2.08 11	1.13 7	.86 3	1.08 5 1.12 6 2.31 13 2.90 14 2.27 12	90 .77 2
$\begin{array}{rrrr} 1.13 & 4 \\ 2.15 & 10 \\ 1.56 & 7 \end{array}$	1.12 3 1.64 8 2.40 11	1.36 5	1.09 1	1.73 9 1.39 6 2.63 13 2.58 12 3.24 14	120 1.12 2
.43 .38 .14	1.17 2 2.77 9 3.06 11	1.50 4	1.15 1	2.50 8 2.37 6 2.96 10 3.21 13 5.14 14	183 1.78 5

5

# STATION ID - 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

.

# HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1966 1966 1967 1967 1968 1968	1963 1963 1964 1964 1965 1965	1926 1926 1933 1933	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925	WATER YEAR RANGE 1920 1920
43.0 13 52.0 9 44.0 11	50.0 10 40.0 14 62.0 8	<b>4</b> 3.0 <b>1</b> 2 68.0 7	74.0 85.0 93.0 24.0 204 104	1 71.0 6
29.0 11 34.3 9 31.0 10	27.7 13 28.0 12 44.3 6	21.3 <b>14</b> 42.0 7	46.3 65.0 56.3 2 56.7 4	3 40.7 8
19.9 10 19.1 11 18.3 12	20.6 9 18.1 13 38.3 4	11.5 14 25.1 8	37.0 56.2 29.7 6 29.7 6 5 5 5 5	7 39.0 3
12.8 11 10.5 13 13.6 9	17.9 7 12.9 10 23.7 5	6.73 1 <b>4</b> 12.7 12	24.6 31.2 17.4 25.7 3 8	15 21.1 6
12.0 8 7.46 13 11.1 9	13.6 10.3 115.4 5	6.26 14 9.09 12	15.4 4 26.9 1 16.7 3 10.5 10 21.0 2	30 12.1 7
7.72 9 5.29 13 9.08 6	8.74 6.73 11 8.86 7	3.91 14 6.18 12	11.8 3 18.0 1 11.0 4 9.08 5 12.3 2	60 6.74 10
6.36 9 4.36 13 6.83 7	7.42 5 5.90 10 6.46 8	3.46 14 5.51 11	0.2 7.7 .98 .10 .43	72
	5.61 5.81 8	2.88 14 5.02 11		120 4.24 13
4.47 9 4.10 11 6.08 5	5.00 8 4.46 10 5.47 7	2.29 <b>14</b> 4.00 12	7.00 12.8 5.56 5.88 6.94 3	183 3.39 13

STATION ID - 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

### ANNUAL AND/OR SEMI-ANNUAL VALUES

MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)           WATER YEAR RANGE 1920 1920         2.28         13           1921 1921         7.40         1           1923 1923         4.77         3           1924 1924         5.35         2           1925 1925         2.03         14           1923 1933         2.56         12           1933 1933         3.01         9           1963 1963         3.48         8           1965 1965         4.03         6

1968 1968

3.88

œ

1968 1968

3.88

7

STATION ID - 16543000 M B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN •

.

ANNUAL AND/OR SEMI-ANNUAL VALUES

MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)

WATER YEAR RANGE

> MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)

WATER YEAR RANGE

DVSTAT ı DAILY VALUES STATISTICAL PROGRAM

÷

.

•

DURATION TABLE OF DAILY VALUES

1971 1971	1966 1966 1967 1967 1968 1968 1969 1969 1970 1970	1961 1961 1962 1962 1963 1963 1964 1964 1965 1965	1956 1956 1957 1957 1958 1958 1958 1958 1959 1959 1960 1960	1951 1951 1952 1952 1953 1953 1954 1954 1955 1955	WATER YEAR 1949 1949 1950 1950	CLASS 1
2		4		ωц		د ی
1		Ŷ		ωo		4
7 20	a wa	7 7 1		60		(JT
0 17	യനയ	5 1 1 5 1 1 5		4 5 9 11 2 7		б
7 17	7 7 7 7 15 7 20 15 15 15 15 15 15	7 8 6 24 1 1 1	14 13 8 6	2 10 9 16 9 16	6 ω 8 J	7
21	216641	- 10 10 10 10	ц 6,86 1 29 5 39 1 39 1 39 1 39 1 39 1 39 1 39 1 39 1	401880 1282 1284 1084	1822	w v
28	20 28 17 32	33 26 27	25 44 19	2413 174163	دی <del>در</del> دی دن	10
~ 15	17 17 17 17 17	2 1 2 3 4 1 2 1 8 5 H H	2000 2000 2000 2000	223 235 235 235	221 241	) 11
27	7 9 5 9 7 25 7 9 30 2 5 5	3225 225 225	1 5 5 5 8 2 3 4 5 2 9 1 7	225522 2222 2242 2342	233	1 12
7 21	6 0 2 3 6 3 0 2 9 3 0 2 9	2 5 3 2 1 7 2 3 2 1 7 3 2 1 7 3 2 1 7 3 2 1 7 3 2 1 7 3 2 1 7 3 2 1 7 3 2 1 7 3 1 1 7 3 1 1 7 3 1 1 7 3 1 1 1 1	91467 25 40 40	342 22 25 25 25 27	ωN	2 13 b
1 1					5.7	5
ίπ	243 243	225 322 32	266922	12395 1477	4 8 N	
20	2323 224 212 212 212 212 212 212 212 212 212	32220 842246	225 225 29 29 29	00240 40740 2407	MBER 27 32	15 IA
17	220 23 23	19 23 23	23342 32042	11220 57650	OF I 29 21	16
18	212 25 25 29 5 7 29	00000000000000000000000000000000000000	223 225 25	22 22 22 22	DAYS 24 19	0r 17
15 5	20 20 20 20	111 111 112 112 112	21 20 18 19	11 12 12 12 12 12 12 12 12 12 12 12 12 1	25 26	18
25	111 1111 11111 1111 1111 11111 11111 11111 111111 11111111	$\begin{array}{c}1\\1\\5\\5\end{array}$	12 12 12 12 12 12 12 12 12 12 12 12 12 1	19 19 19 24	CLAS 14 18	19
15 15	13 13 13 13 13 13 13 13	111 111 12	18 12 11 19	11 11 11 11 12 12 12 12 12 12 12 12 12 1	20 18	20
13	15 15 15	1111 1213 1213 1213 1213 1213 1213 1213	1111 1111 1111 1111 1111 1111 1111 1111 1111	$12 \\ 14 \\ 14 \\ 14 \\ 14 \\ 14 \\ 14 \\ 14 \\ $	13 10	21
n	$10 \\ 12 \\ 12 \\ 12 \\ 12 \\ 12 \\ 12 \\ 12 \\ $	11 12 12 12 12 12 12 12 12 12 12 12 12 1	1111 11 1111 1111 1111 1111 1111 1111	9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	12 19	22
7	$\begin{array}{c}10\\14\\6\end{array}$	1 0 9 8 3 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	200 88	2 2 2 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	12 14	23
9	00 41 00 41 ( <i>r</i>	ი ი <sup>11</sup> ი ფ	1	കരാഗരഗ	P 9	24
4	10285	1 N N N	10 10 10 10	₩000₩	ωw	25
7	20106	ບດາພພພ	ມເປັນເບັນ	4 4 7 4 6	00 44	26
сл	ശസമം	ບບາມອບ	40400	0, W 4 W 0	4 D	27
თ	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	136 2	N H O O N	WNHNA	NN	28
сл	н œ ю и ю	4 N N	0 0 4 4 4 4	44 4	N	29
	$rac{1}{2}$	<b>ω</b> μ Νμ	4 N N H	0 H ( 4	4	30 0
ч	N N H N	N H H	N N H	Ч	4 4	ω μ ω
Ν	ω	ъ	ччч	Þ		32 3
	444	4				ώ ω
	1		N			34 ω
	N					5


STATION ID - 16545000 PUOHOKAMOA STR AB SPRECKELS DITCH NR HUELO, MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN 4

CLASS 22 24 25 25 25 25 25 25 25 25 25 25 25 25 25
VALUE 0.00 0.62 0.97 1.20 1.50 1.90 2.30 2.30 3.60 5.70
TOTAL TOTAL 2 2 2 2 2 2 2 2 2 3 7 0 5 3 0 7 9 6 1 2 1 5 3 0 7 9 6 1 2 15 16
ACCUM 21184 21184 21179 21158 21158 21109 21158 21039 21039 220854 20854 20027 19231 18016 18016
PERCT 100.00 99.00 99.00 99.88 99.35 99.35 97.04 92.54 90.78 85.05 38
CLASS 13 14 15 16 19 20 21 22 22 22 24
VALUE 7.10 8.80 11.00 14.00 17.00 21.00 27.00 27.00 33.00 33.00 42.00 52.00 52.00 81.00
TOTAL 1716 1393 1888 1393 1488 1494 1037 1494 4679 679 619 469
ACCUM 15299 13583 12190 12190 12190 12190 12190 7472 5978 5978 5978 4941 4941 4052 3333 2654 2035
рня 728 64.12 28.54 28.22 28.54 28.22 28.22 19.13 19.13 19.13 2.53 25.73
CLASS 25 25 32 32 34 35
VALUE 101.00 126.00 197.00 197.00 245.00 305.00 381.00 381.00 593.00 740.00 923.00
TOTAL 400 324 253 204 146 109 109 176 15 22 2
ACCUM 1566 1166 842 385 385 239 130 130 24 24 24 24 24 22
PBR 7.39 2.39 1.39 1.39 1.39 1.39 0.61 0.61 0.25 0.01

COPPETCIENT OF SVEW	COEFFICIENT OF VARIATION	STANDARD DEVIATION OF LOGS	MEAN OF LOGS = 1.17503	5.0	10.0	15.0	20.0	25.0	1 CC	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	0.06	95.0	ÉQUALED OR EXCEEDED	$O_{\rm F}$	NUMBER OF VALUES = 19 (1 LISTING OF DATA FOLLOWS:	ADDITIONAL CONDITIONS FOR TH STATISTICS ARE BASED ON LOGI NUMBER OF VALUES IS REDUCED	DURATION DATA VALUES ARE INTERPOLATED DATA ARE NOT ANALYTICALLY FITTED AND THE USER IS RESPONSIBLE FOR J	STATION ID: 16545000 PARAMETER CODE = 00060 STATISTIC CODE - 00003 M	
- A AD10A	= 0.39010	GS = 0.45838 (VARIABILITY INDEX - SEE USGS WSP 1542-A)			8.8 (LOG =	0 (LOG =	1 (LOG =	9 (LOG =	25.5 (Inc = 1.40629)	2 (LOG =	7 (LOG =	5 (LOG =	9 (LOG =	2 (LOG =	62 (LOG =	7.57 (LOG = 0.87886)	(LOG =	5.58 (LOG = 0.74655)	(LOG =	(LOG =	2.79 (LOG = $0.44549$ )	VALUE	DATA	(NUMBER OF NEAR-ZERO VALUES = 0) :	CONDITIONS FOR THIS RUN ARE: ARE BASED ON LOGARITHMS (BASE 10). VALUES IS REDUCED FOR EACH NEAR-ZERO OR ZERO VALUE.	JES ARE INTERPOLATED FROM DURATION TABLE: ANALYTICALLY FITTED TO A PARTICULAR STATISTICAL DISTRIBUTION, IS RESPONSIBLE FOR ASSESSMENT AND INTERPRETATION.	MEAN	CHADACTEDICTOTO

.

COEFFICIENT OF SKEW = 0.42190

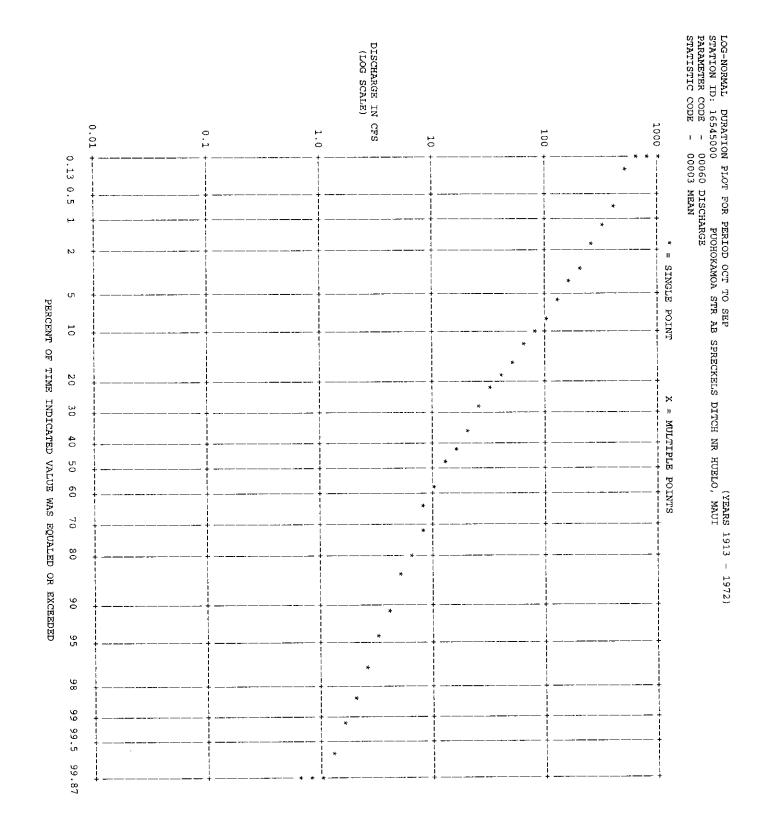

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1942 1942 1942 1943 1944 1943 1945 1945 1945 1945 1946 1946 1947 1947 1947 1947 1948 1948 1949 1949 1950 1950	936 193 937 193 939 193 940 193 193 193 194	1931 1931 1932 1932 1933 1933 1933 1933 1934 1934 1935 1935	1926 1926 1927 1927 1928 1928 1928 1928 1929 1929 1930 1930	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925	1916 1916 1917 1917 1918 1918 1919 1919 1920 1920	WATER YEAR RANGE 1914 1914 1915 1915
2.30 2.30 2.40 1.40 1.20 1.20 1.70 2.20 2.20 2.20 2.20 2.20 2.20 2.20 2	.80 .80 .80 .80 .80 .80 .80 .80	2.60 41 3.70 51 1.70 19 1.70 20 3.70 52	2.20 32 2.50 39 1.50 15 1.90 25 1.50 16	.93 7 2.20 31 3.20 48 2.90 44 1.70 18	7.10 58 1.10 8 .62 1 1.90 24 .93 6	1 5.70 56 5.60 55
2	.23 .23 .90 .83	2.70 41 4.27 52 1.77 18 1.80 20 4.00 51	2.27 2.50 3.50 1.50 1.97 25 1.63 16	1.09 7 2.30 33 3.20 46 3.03 44 1.87 21	7.27 58 1.10 8 .67 1 1.93 24 .93 3	3 5.90 56 5.67 55
2.56 2.39 2.39 2.39 2.39 2.34 2.34 2.34 2.34 2.35 31 31 31 31 31 31 31 31 31 31 31 31 31	.03 .03 .03 .03 .03 .03 .03 .03 .03 .03	3.24 42 4.69 52 1.94 20 1.87 16 4.54 51	2.51 30 3.27 43 1.50 11 2.04 22 1.91 19	1,32 2.30 3.46 47 3.36 49 29	8.06 58 1.10 5 .73 1 2.33 27 1.04 4	7 5.99 55 5.93 54
3.04 29 3.04 29 1.78 11 1.78 11 2.11 14 2.11 14 2.16 17 2.16 17 2.16 17 2.89 27 3.48 39		3.35 36 5.25 51 2.26 20 2.05 13 6.23 53	2.99 28 3.90 425 2.45 23 2.41 22 2.26 19	1.76 10 2.30 21 3.58 40 4.02 47 3.91 46	8.36 56 1.50 7 1.17 2 3.31 35 1.33 4	14 6.33 5.61 55
5.12 5.12 5.12 5.14 5.12 5.12 5.12 5.12 5.12 5.12 5.12 5.12	5455 4555 4555 4555	5.66 39 10.4 54 2.41 10 2.30 8 9.42 51	4.15 28 5.29 35 4.76 31 4.29 29 3.04 17	2.66 14 2.30 7 5.33 36 5.76 40 6.03 43	11.5 55 1.91 5 1.56 2 4.14 27 1.75 4	30 7.44 47 8.01 49
12.23 12.23 12.23 12.21 12.21 12.21 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.20 12.21 1.	· 44.5 9.755 44.555 44.255 2 2.7555	10.7 36 14.3 46 5.96 11 8.36 23 16.5 50	7.79 18 12.5 44 15.2 47 9.34 29 22.4 56	5.79 10 3.30 1 15.5 49 9.94 31 10.5 33	18.2 3.97 7.66 17 9.28 26 3.31 2	60 11.5 38 12.3 43
19.1 19.1 8.37 8.37 10 8.52 12 15.7 12 19.9 11.1 22 11.1 22 13.0 39	7 04.462 7 0.355 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	11.9 24 25.9 55 8.11 9 11.7 23 18.5 40	8.66 14 13.3 29 25.2 54 13.2 27 33.6 57	8.07 6.21 19.0 117.7 37 14.8 30	20.8 48 4.93 2 10.8 21 12.1 25 4.57 1	90 19.5 45 19.2 43
121.8 41 12.8 5 35 12.8 10 10.3 10 18.3 34 12.8 46 14.1 26 14.1 26 20.2 37	4 10000 1001000 1001000 1001000	13.8 23 23.9 48 9.01 6 11.3 13 19.8 36	10.5 11 24.0 49 30.0 54 13.0 21 34.3 56	13.0 20 8.04 4 22.0 42 15.7 28 22.3 44	35.1 57 7.49 3 11.5 14 14.1 25 7.07 2	120 25.1 50 20.7 38
20.1 45 22.1 7 12.1 7 17.0 16 24.9 35 24.9 35 27.2 39 36.0 52 27.8 42	64.077 6.885 031	21.8 24 35.3 50 10.9 4 13.2 9 27.7 41	10.6 22.2 30.8 18.4 46.4 57	18.2 19 15.1 12 24.2 31 23.1 28 35.6 51	44.3 55 10.8 3 31.2 48 18.8 21 11.0 6	183 36.8 53 24.6 34

,

STATION ID - 16545000 PUOHOKAMOA STR AB SPRECKELS DITCH NR HUELO, MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1970 1970	1969 1969	1968 1968	1967 1967	1966 1966	1965 1965	1964 1964	1963 1963	1962 1962	1961 1961	1960 1960	1959 1959	1958 1958	1957 1957	1956 1956	1955 1955	1954 1954	1953 1953	1952 1952	1951 1951	RANGE	WATER YEAR
2.20 34	1.2011	1.20 10	2.00 28	1.40 14	1.60 17	2.9046	.90 5	1.3012	2.50 40	2.30 37	3.50 50	2.30 36	2.10 30	2.00 27	1.70 23	.90 4	.90 3	1.90 26	2.40 38	щ	
2.6040	1.27 10	1.33 12	2.20 30	1.40 14	1.67 17	3.03 45	.90 2	1.30 11	2.50 38	2.50 37	3.50 50	2.47 35	2.23 31	2.03 26	1.87 22	1.00 6	.96 5	2.10 27	2.53 39	ω	
				1.51 12											1.90 18				2.69 32		
				2.12 16	2.11 15	4.06 48	1.041	1.56 8	3.43 38					2.71 25	2.19 18						
				2.85 15	3.06 18	6.92 46	1.41 1	2.14 6	4-84 32					3.98 24	5.91 42					30	
				9.33 28	9.67 30	11.8 42	4.76 6	4.67 5	10.5 34	11.7 40	11.7 39	17.8 52	6.15 14	6.91 15	7.34 16					60	
œ	4	Ν	ю	9.56 17	4	9	7	σ	σ	0	4	ω	φ	Q	σ	U	ω	ω		06	
25.8 51	27.0 53	13.3 22	22.2 43	11.2 12	16.9 30	15.2 27	6 69.6	9.56 8	13.9 24	18.1 33	17.6 31	21.4 39	15.7 29	11.7 17	21.5 40	12.1 18	8.38 5	23.3 47	9.47 7	120	
.4	.'	œ	o	13.6 10	22.8 27	.4	6	.4	o	0	თ	Q	ጣ	30.8 47		υ	7	υ	9	183	

1971 1971

.86 2

.94 4

1.15

7

1.49 6

2.56 13

5.37 8

5.16 3

5.83 1

19.7 23

.

.

HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1946 1946 1947 1947 1948 1948 1949 1949 1949 1949 1950 1950	1941 1941 1942 1942 1943 1943 1944 1944 1945 1945	1936 1936 1937 1937 1938 1938 1938 1938 1939 1939 1940 1940	1931 1931 1932 1932 1933 1932 1933 1933 1934 1934 1935 1935	1926 1926 1927 1927 1928 1928 1929 1929 1929 1929 1930 1930	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925	1916 1916 1917 1917 1918 1918 1919 1919 1920 1920	WATER YEAR RANGE 1914 1914 1915 1915
464 808 3806 469 35 35	640 15 665 13 251 57 291 53 272 55	238 58 582 19 882 2 501 27 483 31	455 38 476 33 774 6 413 42 413 43	283 735 486 35 40 565 21	433 41 622 16 531 22 693 11 735 7	724 509 25 674 12 586 18	1 511 24 458 37
202 48 518 5 251 3 256 43 304 32	295 33 516 6 149 55 196 50	114 58 459 9 231 46 347 25	322 29 274 37 433 12 358 22	141 57 323 28 276 36 311 31 434 11	267 40 483 40 354 24 449 10 373 19	494 380 1 425 13 392 17	3 416 14 266 41
125 49 379 5 294 13 162 42 253 18	189 33 447 1 101 56 82.8 57 131 48	101 55 286 14 413 3 158 45 221 25	191 32 204 31 229 23 165 38 245 19	81.7 58 172 36 139 47 227 24 339 7	139 46 338 8 330 9 218 26 208 29	389 232 278 278 211 342 6	7 303 12 165 <b>4</b> 0
94.0 48 207 9 188 14 121 36 174 16	120 37 286 1 82.0 55 49.6 58 108 43	86.8 51 227 4 222 5 110 40 141 26	110 <b>4</b> 1 171 17 117 38 127 34 135 29	61.9 57 107 44 89.0 50 149 23 191 13	131 32 208 8 192 12 144 25 151 22	241 2 162 19 230 3 128 33 179 15	15 208 7 107 45
78.6 39 137 10 147 7 94.4 28 121 13	72.8 44 194 1 39.0 56 39.0 58 70.5 47	71.3 46 158 5 153 6 78.1 41 101 25	67.3 49 115 17 77.3 42 91.7 29 86.0 33	46.8 57 79.7 38 62.2 53 117 16 118 15	83.2 35 158 4 108 23 91.4 31 124 12	145 8 109 22 142 9 79.7 37 99.7 26	30 164 3 73.5 <b>4</b> 3
66.6 29 86.0 12 97.0 10 64.2 33 96.0 11	59.8 39 131 3 47.1 52 33.4 57 42.9 54	57.0 44 114 5 101 9 62.3 37 63.3 35	59.4 40 75.5 22 47.1 51 64.6 32 69.7 26	28.3 58 52.5 48 56.0 45 78.1 18 103 8	63.5 34 120 4 70.5 24 76.4 20 75.5 21	106 7 80,4 15 110 6 58,1 43 54,5 46	60 135 2 62.5 36
55.2 32 65.9 17 55.5 9 75.3 12	51.3 38 102 5 40.0 51 28.3 57 30.5 55	52.535 104 4 91.07 55.729 49.739		25.0 58 43.7 46 68.0 115 80.8 10	54.8 33 112 2 58.4 24 61.5 21	85.6 91.8 43.9 45 39.2 52	90 110 3 52.3 36
52.8 24 55.6 17 72.5 10 64.8 14	51.8 79.4 38.4 27.0 57 28.4 55	04040 04000	44.4 40 65.4 13 36.6 51 53.7 21 52.0 26	21.3 58 41.7 46 42.5 44 60.7 15 78.1 6	46.2 35 113 2 59.3 30 59.1 16 53.0 22	76.5 9 50.5 29 77.6 7 40.6 48 34.2 54	120 103 3 43.0 43
40.9 34 49.8 20 61.1 10 38.0 39 52.5 15	- 47.5 66.4 34.3 23.0 57 53 53	H 0 4 H H	42.5 32 55.2 13 43.6 28 47.5 23	17.5 58 37.1 42 41.9 33 52.3 16 66.3 7	40.3 36 82.5 3 42.8 31 48.0 22 49.9 19	61.4 9 36.2 44 35.4 5 35.4 46 24.9 56	183 95.8 1 37.2 41

~

,

# HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1971 1971	1970 1970	1969 1969	1968 1968	1967 1967	1966 1966	1965 1965	1964 1964	1963 1963	1962 1962	1961 1961	1960 1960	1959 1959	1958 1958	1957 1957	1956 1956	1955 1955	1954 1954	1953 1953	1952 1952	1951 1951	WATER YEAR RANGE
495 29						521 23										503 26					
317 30						329 27									617 2				169 53		
207 30					169 37					182 34					329 10				118 51		
131 31					115 39					139 28	139 27				221 6				83.3 54		15
110 20	99.3 27	185 2	91.5 30	63.5 52	104 24	111 19				78.6 40	85.7 34	87.3 32	113 18	81.4 36	121 14	129 11	63.5 51	71.7 45	61.154	67.1 50	30
83.2 14						66.7 28	44.9 53	69.9 25	38.9 56	61.2 38	64.7 31	72.9 23	78.7 17	54.3 47	85.2 13	80.1 16	49.7 49	58.8 42	40.8 55	59.1 41	60
66.1 16	ō	42	Ļ	ю.	55.5 31		.,	-7	Ň	42.6 47	ů.	iv N	Ņ	ъ	72.2 13	4	Ň	∞	٠	.,	
55.2 18					52.1 25					44.041					67.0 12	9	9	ω	36.9 50	œ	
52.8 14	4	Ņ		i i i	40.4 35					37.9 40					57.1 12				33.8 50		183

٠

.

### ANNUAL AND/OR SEMI-ANNUAL VALUES

20.0 19.9 26.4	1951	1949 26.2	1947 1947 36.0 42 1948 1948 43.2 49	1946 28.3	1945 22.1	1944 17.1	1943 26.0	1942 48.3	1941 1941 33.9 37		1939 1939 37.0 44	1936	1935 33.9	1934 28.0	1933 18.3	1932 40.9	1931 33.0	1930 47.8	$\begin{array}{cccccccccccccccccccccccccccccccccccc$			1925 38.5	1924	1923 33.7	1922 47.8	1921 26.8	1920 17.4	1919 26.4	1918 43.7	1917 23.5	1916	1915 32.8	14 66.4	PANCE.	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)	
1953 1954 26.4		1949 26.2	1947 1947 30.0 17 1948 1948 43.2 10	1946 28.3	1945 22.1	1944 17.1	1943 26.0	1942 48.3	1941 33.9	1940 27.7		ר ביק קיסיס		1934	1933 18.3	40-9	1931	1930 47.8	1929 32	1928 34.8	1927 1927 30.0 34		1924 36.5	1923 33.7	1922 47.8	1921 26.8	1920 17.4	1919 26.4	1918	1917 23.5	1916 53.5	32.8	14 66.4	RANGE	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)	

STATION ID - 16545000 PUOHOKAMOA STR AB SPRECKELS DITCH NR HUELO, MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN •

•

ANNUAL AND/OR SEMI-ANNUAL VALUES

MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)           WATER VEAR RANGE 1955 1955 1956 1956 1957 1957 1958 1959 1958 1959 1958 1959 1960 1960 1961 1961 1963 1963 1963 1963 1965 1965 1966 1965 1966 1965 1968 1968 1969 1969 1969 1969 1970 1970 1971 1971         38.6 12 38.5 14 38.5 14 26.7 14 26.7 14 27.5 39 32.4 35 35 35 36 37.5 39 32.1 31			29.3	1966 1966 25.8 12	27.5	24.4	25.5			1955 1955 38.5 45	RANGE	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)
											RANGE	WATER YEAR	MEAN VALUE AND RANKING FO PERIOD INCLUDED IN HIGH-VALUE / (OCT-SEP)

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN •

.

DURATION TABLE OF DAILY VALUES FOR PERIOD OCT TO SEP

1951 1951 1952 1952 1953 1953 1954 1954	1946 1946 1947 1947 1948 1948 1949 1949 1950 1950	1941 1941 1942 1942 1943 1943 1944 1944 1944 1944 1945 1945	1936 1936 1937 1937 1938 1938 1939 1938 1939 1939 1940 1940 2	1931 1931 1932 1932 1933 1933 1934 1934 1935 1935	1926 1926 1927 1927 1928 1928 1929 1929 1930 1930	1921 1921 1922 1922 1923 1923 1923 1923 1924 1924	WATER YEAR RANGE 1919 1919 1920 1920	CLASS 1 2 3 4
			4					4н СЛ
								თ
			وببا					7
							ц	ω
		ε u u		ω	ч	4	12	φ L
NN		16 17						10
116 11	17	28 24	8 4	56 12	16 22	12 13 13	52	11
22 20034	л 5 5 5 7 9 7 9 7 9 7 9 7 9 7 9 7 9 7 9 7	11 14 29 28	-					12
12 34 24	22 17 10	30 30 30 30	$\begin{array}{c} 1\\1\\4\\1\end{array}$	17 58 19	2 3 5 9 5 8	17 12 29 29	44 87	13
23 23 23 23 23 25 23	19 19 19 19	25 25 25 25	19 3 21	143 3 14251	41 29 29	125 19 19	NUMB 23 6 39 5	14
22 28 28	26 28	29 29 27	6 4 6 7 6 4 6 7 6	24433 29219 2992	50 41 16	43 31 31 31	68 52	15
42 38 32	22 27 29 29	230344 28053	59 59 59 59 59 59	5245 55445	40340 403470	60068 1918	226 F	
29 19 22	20 20 20 20	12221 25547	236582 25658	50 50 50 50 50 50 50	303 303 303 303 303 303 303 303 303 303	328 28	DAYS 40 21	17
57 26	21 29 26	38 29 20 22	33 33 33 33 33 33 33	24 50 50	20 20 20 20	22 28 19	26 12	,
37 23 30	32857 372857	31 29 25 25	349 319	17 17 11 24 22	222 224 25	1 24 1 24 1 8	CLAS 27 8	19
33 33 33	32941 329413	34 28 27 17	23242 23262 23862	13 24 20 20	113 113 113 113	12841 1584	ي 10 و	
28 30 26	22 27 23 33	29 29 20	22 26 26 29	$     \begin{array}{r}       1 \\       2 \\       2 \\       2 \\       2 \\       1 \\       3 \\       1 \\       1 \\       1 \\       3 \\       1 \\     $	157 154 11	16 16	14 7	21
13 12 19	19 32 19	14 12 10 10	129 129 129	209 1299	1 9 9 0 6 7	$18 \\ 125 \\ 14 \\ 14$	11 4	22
20 20 20	12 35 14	ч 0 0 0 0 0 0	23 24 9	10 14 11	$   \begin{array}{c}     11 \\     10 \\     11 \\     11 \\     11 \\   \end{array} $	21 25 7	ម ហេ ហ	23
16 12 12	$   \begin{array}{c}     12 \\     12 \\     11 \\     11 \\   \end{array} $	10 9 9 9	16 11 11	19 19 19	16 18 18	19 10 13	18 11	24
20 8 70	1 4 4 5 1 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	୧୦୫୫୦	112 112 114	25 12 14	12 12 12 12	12 17 28 9	ч ч ч	25
11 9 8	1157 1257 1257	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	12 13 16	18 117 12 12	34127 34127	22 17 15	17 2	26
თთთდ	1 9 1 1 9 1	$10^{10}$	115 155 155 155 155 155 155 155 155 155	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	285 297 297	10 29 12 16	μ on .	27
ა ი ა ი ი	11 13 13 13 13	30	112 15 15	19 19 5 11	59 59	14 13 13 17	ωN	28 2
3 7 9 8	10 10 10	<b>⊳</b> ωυωα	13 7873	н	19 19	14 14 15 15	ωσ	29 3
2221	noru A	មកលក្រួល	04004		ည်မြစ်ရေ	692 1	Ч	0 3
4 4 4	ωΓ∞4υ	Y ∞ X	5000		1040 1	8722	ω 	ω
	ωц	ωN	чч		ц ц	⊶ co r∪ 4∎	N	ເນ ເມ
					4			34
								ц U

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

,

.

Ś. 3 511 D A J B 1 VALUES

1981 1981 1982 1982 1983 1983 1983 1983 1984 1984 1985 1985	1976 1976 1977 1977 1978 1978 1978 1978 1979 1979 1980 1980	1971 1971 1972 1972 1973 1973 1973 1973 1974 1974 1975 1975	1966 1966 1967 1967 1968 1968 1969 1969 1969 1969 1970 1970	1961 1961 1962 1962 1963 1963 1964 1964 1965 1965	1956 1956 1957 1957 1958 1958 1959 1959 1960 1960	WATER YEAR 1955 1955	CLASS	
						~	1	
		12 12					N	
Ч		44					ω	
сл С		N	Ν	N			<b>4</b> л	
43 10 3 16	2 18	1 13 1 15	N	10			о, 0	
40 13 7 20	თ	ч е ч н	r 8	თ ი დ			7	
10 12 12	12 14	19 5 5	4	10 4			00	
41 17 19 22	3112 35 35 35 35 35 35 35 35 35 35 35 35 35	18 12 19	11 17 17 17 17 17 17 17 17 17 17 17 17 1	13 13 13			9	
25 17 50 32	27 18 15 7	19 18 28 28	0 U H J	18 13 3			10	
2 4 2 3 8 4 4 1 8	26 13 5	13 12 22 24	144 1024 100 100 100	1295 ω			11	
19 30 22	201 25 24 24 25 24	$   \begin{array}{c}     15 \\     25 \\     23   \end{array} $	10 12 12	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4 35	ω	12	
13224 34715	1224 54040	319510 319510	25 29 37 31	20 21 21 21	19 23 25 25	00	13	DQ
11332 47244	20 29 29 20	26024 256024	3 3 4 2 3 9 3 3 4 3 9 3 4	34506 51206	313 313 313 313 313 313 313 313 313 313	18 DNN	14	DURATION TABLE
23 23 23 23	2266 2493	293 293 293	22 23 28 28	29 29 39 33	2 2 6 2 8 2 8 5 6	NUMBER 8 24	15	ON T.
13 20 13	38 38	29 29 29 29	52254 20664	52 52 52 52	44343 44177	25 25	16	ABLE
27 27 21 21	19 19 19	15 21 27	20 20 26	30255 30055 30055 30055 30055 30055 30055 30055 30055 30055 30055 300550	86550 8670 870 870 870 870 870 870 870 870 870 8	DAYS 20	17	OF 1
$   \begin{array}{r}     12 \\     23 \\     23 \\     15 \\   \end{array} $	3000 40004	23 23 28	291751 291751	3 2 2 2 2 2 2 2 2 2 5 5 2 4	34420 46370	35 10	18	DAILY VALUES
110 100 100	21 22 22 29	20 28 21	27 20 27 26	125	24353 2353	CLAS 35	19	Y VA
1 4 2 2 8 1 4 4 2 2 8	$   \begin{array}{c}     1 \\     1 \\     1 \\     1 \\     1 \\     1 \\   \end{array} $	$10 \\ 13 \\ 11 \\ 11 \\ 11 \\ 11 \\ 11 \\ 11 \\ $	19 19 19 19 19	120266	30 32 37 21	35 35	20	LUES
199 192	10440 10440	113	122 122 192	9 8 9 1 1 1 1 7	122 28 28	37	21	
119 119 6	11 12 12	17 10 9 9	110	12 11 7 11	122 122 14	30	22	
4 U V 4	11 11 11 10 10 10 10 10 10 10 10 10 10 1	13 13 13	13 10 10	10 15 15	20 11 21 12	17	23	
75823	13 ი ი ფ	4 44300	$\begin{array}{c} 1\\1\\1\\3\\1\\5\end{array}$	7 10 12 10	16 13 16	17	24	
ພວຼຊພບ	12 5 5 5 5	00 W U V 4	11 11 11 11	ფიდიი	20 7 23 11	9	2 5	
4488 44488	10 10 10 10	ωμφαφ	ი ეფეთ ეთ	10 10 10	13 15 10	10	26	
5 7 2 2 2	1 4 0 0 0 1	N W J N U	୰ଊ୰୵୶୶	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10 9 9	Q	27	
12 6 12 6 13 13 13 13 13 13 13 13 13 13 13 13 13	555000	୰୲୵୶ୄ୰୶	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	ារាប្រ 4 ល 4	Иддар	ω L	28	
10 12 12 12	ц 1 2 1 2 1 2 1 2 1 2 5 1 2 1 2 1 2 1 2 1	ט טין ט	4 70 6 4 0 1	1327 1312 14	4.00000	10	29 3	
ราย มีมี มีมีมีมีมีมีมีมีมีมีมีมีมีมีมีมีม	കേധരാ ച	н <b>н</b> Фию	4 1 1 2 1 2 3 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	100 4 800 4	J J 6 6 W	9	30 31	
44 14 14 10 14 10 10 10 10 10 10 10 10 10 10 10 10 10	15 ω 22 15 1	ωωμ Α	ມ <b>1</b> ພິ ຫ ມ ມ	ហេសហស	44W04	U	ω	
1 9 7	2 19	4	12 12 2	0 0 U	N		2 33	
							3 34	


34 35

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

٠

12	11	10	9	8	7	თ	υ	4	ω	2	4	CLASS
0.32	0.24	0.18	0.13	0.10	0,08	0.06	0.04	0,03	0.02	0.01	0.00	VALUE
648	816	400	321	130	131	119	13	17	N	20	N	TOTAL
22136	22952	23352	23673	23803	23934	24053	24066	24083	24085	24105	24107	ACCUM
91.82	95.21	96.87	98.20	98.74	99.28	99.78	99.83	06.66	99.91	66.66	100.00	PERCT
24	23	22	21	20	19	18	17	16	15	14	13	CLASS
10.00	7.70	5.80	4.30	3.20	2.40	1.80	1.40	1.00	0.76	0.57	0.43	VALUE
783	750	939	1174	1365	1616	1891	1668	2388	2062	1576	1406	TOTAL
4653	5403	6342	7516	8881	10497	12388	14056	16444	18506	20082	21488	ACCUM
19.30	22.41	26.31	31.18	36.84	43.54	51.39	58.31	68.21	76.77	83.30	89.14	PERCT
	35	34	يى دى	32	- 13	30	29	28	27	26	25	CLASS
	0.00	0.00	139.00	104.00	78.00	58.00	44.00	33.00	25.00	18.00	14.00	VALUE
	¢	0 0	, µ	96	241	340	488	618	681	740	000	TOTAL
	c	) C	γμ	16	5 G 5 G	0/8	1100	1784	2465	3205	3870	ACCUM
	0.00	0.00	0.00	0.40	1.40	7.8T	4.84	7.40	10.23	13.29		PERCT

COEFFICIENT OF VARIATION COEFFICIENT OF SKEW	D DEVIATION OF	MEAN OF LOGS = $0.37525$	35.0 30.0 25.0 15.0 10.0	95.00 445.00 45.000 45.000 45.000 45.0000000000	NUMBER OF VALUES = 19 (NUM LISTING OF DATA FOLLOWS: PERCENT OF TIME VALUE EQUALED OR EXCEEDED	ADDITIONAL CONDITIONS FOR THIS RUN ARE: STATISTICS ARE BASED ON LOGARITHMS (BASE 10). NUMBER OF VALUES IS REDUCED FOR EACH NEAR-ZERO	STATISTIC CODE - 00003 MEAN DURATION DATA VALUES ARE INTERPOLATED DATA ARE NOT ANALYTICALLY FITTED AND THE USER IS RESPONSIBLE FOR J	STATISTICAL 541500 = 00060
= 1.64853 = 0.49505	= 0.61861 (VARIABILITY INDEX - SEE USGS WSP 1542-A)		$\begin{array}{rrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrr$		(NUMBER OF NEAR-ZERO VALUES = 0) : DATA VALUE	3 FOR THIS RUN ARE: ON LOGARITHMS (BASE 10). REDUCED FOR EACH NEAR-ZERO OR ZERO VALUE.	00003 MEAN JES ARE INTERPOLATED FROM DURATION TABLE: ANALYTICALLY FITTED TO A PARTICULAR STATISTICAL DISTRIBUTION, IS RESPONSIBLE FOR ASSESSMENT AND INTERPRETATION.	CHARACTERISTICS FOR MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI

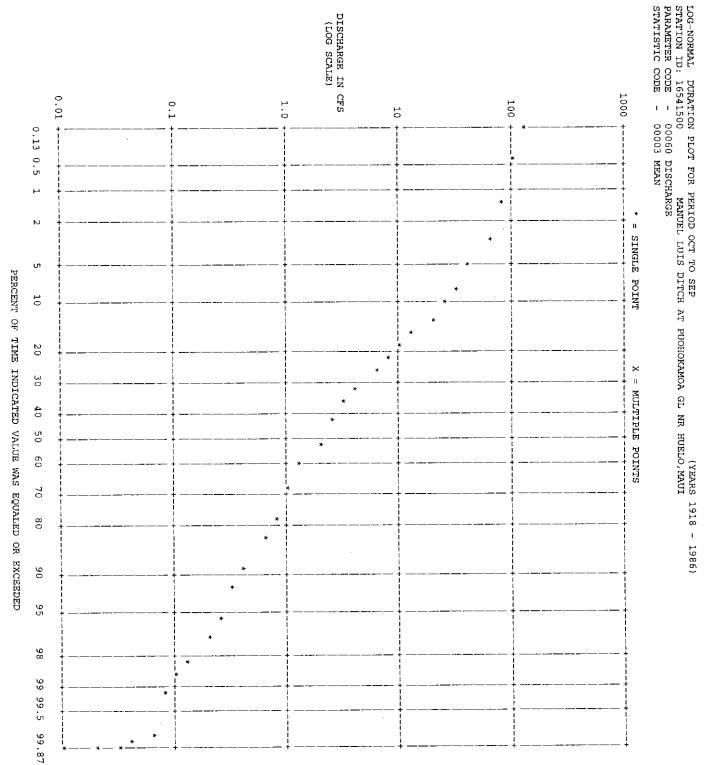

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUT PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

1951 1951 1952 1952 1953 1953 1954 1954 1955 1955	1946 1946 1947 1947 1948 1948 1949 1949 1950 1950	1941 1941 1942 1942 1943 1943 1944 1944 1945 1945	1936 1936 1937 1937 1938 1938 1938 1938 1939 1939 1940 1940	1928 1928 1929 1929 1930 1930 1931 1931 1932 1931 1932 1932 1933 1933 1934 1934 1935 1935	921 192 922 192 923 192 924 192 924 192 926 192	WATER YEAR RANGE 1919 1919 1920 1920
.34 49 .22 31 .22 31 .22 32 .26 36	.2635 .3447 .3448 .3448	.26 34 .39 55 .17 28 .17 29	.31 45 .080 12 .87 66 .45 59 .0000 1	. 46 . 31 46	ກທ µດທµ ການ µດທພ	1 .31 38 .15 21
.39 .36 .23 .23 .23 .23 .30 .30 .35	.26 .34 .79 .37 .37 .39 53	.29 34 .39 52 .34 45 .17 25 .20 28	.31 43 .53 60 .59 65 .17 3	.46 57 .31 39 .31 40 .62 64 .31 40 .31 41 .31 42 .31 42 .15 22	-0 FJUF	3 - 41 55 - 15 20
.43 49 .49 56 .27 25 .27 25 .32 33	.29 29 .34 36 .50 57 .44 53	.30 30 .43 48 .39 43 .20 21 .21 23	.3538 .6360 .9166 1.1966	.46 54 .33 35 .37 40 .75 62 .31 31 .31 31 .37 41	04470 W 0 4070 W 10	7 .44 52 .15 18
.56 .94 .30 23 .36 30 33	.34 28 .49 44 1.21 63 .75 57 .77 59	.34 27 .53 48 .43 37 .25 21 .23 20	.44 38 1.22 64 1.39 65 1.87 66 .44 39	.54 50 .35 29 .46 41 .12 62 .32 26 .32 26 .51 25	10404 FA 10400	14 .51 46 .17 15
.77 43 2.83 63 .38 22 .57 30 1.04 50	.48 26 .74 38 1.77 58 1.07 53 1.79 59	.86 45 .77 42 .74 40 .29 16 .31 19	.86 44 1.96 66 3.32 65 .69 37	.95 47 1.07 52 .66 36 1.67 57 .40 24 .94 46	1136 124 54 55 45 53 55 55 55 55 55 55 55 55 55 55 55 55	30 .61 35 .27 14
1.04 24 3.57 55 .81 19 1.61 38 1.39 29	1.06 25 4.42 57 4.18 56 2.19 46 4.53 59	1.31 27 1.52 35 2.48 49 .99 23 .70 15	1.35 28 4.92 62 2.69 53 4.86 61 1.97 43	6.41 64 2.09 44 7.32 66 1.72 41 2.67 51 1.55 36 1.55 36 2.22 47	.0693 .28593	60 1.51 34 .37 9
1.82 19 5.01 55 2.10 30 2.03 28 3.74 45	4.03 48 5.91 58 2.84 39 5.52 56	4.32 51 4.01 47 4.15 49 1.85 21 1.25 15	1.31 16 9.27 64 4.01 46 5.64 57 2.83 38	9.13 63 11.6 66 2.35 34 4.33 52 4.33 52 1.98 27 2.46 35	.92 .10 .60 .82 .96 .24 5	90 2.74 37 .47 5
2.39 26 5.49 55 1.74 14 2.08 20 4.86 50	4.65 5.95 3.67 38 5.33 54 7	.60 .95 .20 .16 20 3	. 406 . 406	10.565 3.9339 3.1333 4.1641 4.1641 .9910 1.9218 3.1734	.13 .13 .50 .62 .62 .50 .50 .50 .50 .50 .50 .50 .50 .50 .50	120 2.97 30 .82 5
4.13 5.49 2.59 10 3.49 36	5.91 9.34 12.2 4.68 32 52 52	.72 .79 .10 .10 .10	. 74 . 65 . 48	13.865 12.9043 12.9043 12.4963 1.4430 1.8751 1.2051 2.2051 2.20524 2.22524 2.22524 2.22524 2.22524 2.22524 2.22524 2.22524 2.22524 2.22524 2.25524 2.25524 2.25524 2.25524 2.555244 2.55524 2.555524 2.555244 2.555524 2.555524 2.5552524524 2.55524 2.55524 2	. 12.74 2.74 . 2.94 . 4.9 . 5.9 . 5.	183 3.88 25 2.20 8

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

·

.

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1981 1981 1982 1982 1983 1983 1984 1984 1985 1985	1976 1976 1977 1977 1978 1978 1979 1979 1980 1980	1971 1971 1972 1972 1973 1973 1973 1973 1974 1974 1975 1975	1966 1966 1967 1967 1968 1968 1968 1969 1970 1970	1961 1961 1962 1962 1963 1963 1964 1964 1965 1965	WATER YEAR RANGE 1956 1956 1957 1957 1958 1958 1959 1959 1960 1960
.060 9 .18 30 .060 10 .050 8 .030 4	.12 18 .040 5 .11 17 .16 26 .16 27	.080 15 .16 25 .070 11 .010 2 .010 3	.050 7 .13 19 .13 20 .090 16 .24 33	.28 37 .050 6 .36 13 .36 54	1 .34 51 .43 57 .43 57 .43 58 .36 53
.060 8 .19 27 .060 9 .080 13 .030 4	.14 18 .047 5 .11 16 .16 23 .16 24	.097 15 .17 26 .070 10 .010 1	.060 7 .15 19 .13 17 .090 14 .26 33	.3136 .06016 .08011 .4154 .08012	3 
.060 5 .40 46 .060 6 .10 13 .030 3	.15 17 .060 4 .11 15 .18 19 .21 22	.10 14 .20 20 .080 9 .010 1 .013 2	.071 8 .28 27 .13 16 .10 12 .29 28	.3639 .0717 .08610 .4350	7 - 41 - 38 42 - 62 55 - 43 51
.061 4 .51 47 .069 5 .12 10 .030 3	.18 17 .071 6 .14 13 .21 19 .46 42	.11 9 .26 22 .084 8 .029 2 .025 1	.18 16 .38 31 .19 18 .12 11 .41 34	.3932 .0847 .1614 .5451 .1312	14 .53 49 .41 36 .56 53 .76 58 .49 45
.072 2 1.89 61 .094 5 .16 8 .054 1	.36 21 .078 3 .26 13 .60 33 1.06 51	.17 9 .38 23 .10 6 .087 4 .19 11	.31 17 .58 31 .46 25 .16 7 1.17 56	.58 32 .19 10 .21 12 .96 48 .29 15	30 - 98 49 - 50 27 3.16 64 1.85 60 - 54 28
.12 1 4.72 60 .21 4 .79 17 .29 7	.51 10 .15 2 .53 11 2.10 45 5.89 63	.61 12 .80 18 .22 5 .19 3 .34 8	.97 22 1.48 30 .91 20 2.62 50 1.50 33	1.08 26 .71 16 .26 6 1.84 42 1.66 40	60 1.58 2.58 2.46 58 2.46 58 2.46 58 2.46 58 39
.35 2 7.16 59 .24 1 1.16 14 1.88 22	.69 9 .47 4 2.33 32 1.94 25 7.93 61	.59 8 1.60 18 .48 7 .48 6 .43 3	00004		90 2.90 2.34 2.34 3.32 53 3.21 41 83 20
.88 7 10.1 64 .88 8 .99 9 1.76 15	.82 2.08 2.32 3.39 36 9.08 62		40000	1.63 13 1.45 11 2.02 19 2.70 28 3.10 31	120 2.75 29 4.20 43 5.02 52 4.49 44 2.09 22
1.79 5 12.9 64 1.75 4 2.35 9 8.09 53	2.13 3.80 3.39 20 16.5 66		.77 1 .62 3 .19 2 .71 3	40000	183 7.61 49 5.21 34 6.22 46 6.25 47 5.85 42

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

1951 1951 1952 1952 1953 1953 1954 1954 1955 1955	1946 1946 1947 1947 1948 1948 1948 1949 1949 1949 1950 1950	1941 1941 1942 1942 1943 1943 1943 1943 1944 1944 1945 1945	1936 1936 1937 1937 1938 1938 1938 1939 1940 1940	1928 1928 1928 1929 1930 1930 1931 1931 1932 1931 1932 1932 1933 1933 1933 1933 1934 1934 1935 1935	Active and a constraint of the second	WATER YEAR
99.0 35 82.0 51 79.0 53 60.0 58 99.0 36	99.0 33 105 24 105 25 99.0 34 105 26	105 22 105 23 77.0 54 99.0 32 76.0 55	71.0 56 99.0 31 105 20 88.0 47 105 21	105 19 87.0 48 53.0 59 43.0 63 40.0 64 34.0 66 37.0 65 52.0 60	20 20 20 20 20 20 20 20 20 20 20 20 20 2	-
79.3 29 53.7 45 46.0 56 52.0 49 85.7 18	55.3 44 96.3 10 83.7 21 69.0 41 70.7 40	88.7 16 90.0 14 48.3 52 47.3 53 50.7 51	37.2 61 89.3 15 95.0 11 52.3 48 90.7 13	777.034 711.039 42.058 40.058 40.063 34.063 55 55	2007 101 1007 1007 1007 1007 1007 1007 1	<b>ن</b> ر
65.4 16 43.9 41 33.4 50 30.8 56 82.7 10	32.3 53 88.1 7 68.4 15 47.1 40 49.9 32	48.8 86.6 31.954 26.260 34.4 49	18.7 65 57.3 25 72.6 14 41.7 43 63.9 18	40 40 40 40 40 40 40 40 40 40	28.44 2.3 2.4 2.4 2.4 2.4 2.4 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5	Ļ
50.8 15 28.6 42 24.8 49 18.9 59 52.7 13	28.043 57.79 45.820 34.533 44.421	28.8 39 57.2 10 24.7 50 15.0 62 26.5 46	14.3 63 46.9 18 41.6 24 27.2 44 42.5 23	37.8 27 54.0 12 23.7 52 28.7 52 28.7 40 213.8 65 21.8 54 25.0 48	104 0044 00 46 0000 00 70 1 1 0	د ار
35.6 14 18.2 46 20.7 40 15.7 55 32.2 18	21.6 37 38.7 10 37.5 12 26.2 32 29.9 24	19.8 42 44.8 8 17.3 52 9.98 63 18.0 49	10.9 62 34.7 15 30.5 23 19.0 45 27.9 27	31.6 20 36.1 13 20.6 1 13 20.6 41 20.6 41 11.7 60 12.7 50 18.1 47	044 440 480 044 0050 46 050 14 004	30
24.1 17 12.4 51 16.8 34 10.4 55 21.1 23	17.1 32 24.0 18 27.6 11 18.3 29 25.0 14	. 3 6 2 0 9 5 6 4 4	9.37 57 25.3 13 22.2 21 16.0 39 16.6 35	26.7 12 29.2 16.1 3 17.7 31 12.26 58 12.1 44 12.1 44	441345 60 4413 50 44 50 50 50 50 50 50 50 50 50 50 50 50 50	60
19.0 20 11.6 45 9.66 51 22.7 14	0.4 4.1 2.5 2.2 2.2 2.2 2.2 2.2 2.2 2.2 2.2 2.2	1.8 98 54 54 55 54 5 54 5 5 5 5 5 5 5 5 5 5 5	44440 0446	5000 ×01	2, 6, 79, 0, 8 6, 37, 0, 8 7, 9 7, 9 7, 9 7, 9 7, 9 7, 9 7, 9 7, 9	06
16.9 20 11.9 37 9.48 49 9.57 47 19.5 13	чачаы оччыч		0.17 0.17 0.18 11 0.16 21 0.17 15	219.6 229.6 23.9 5 23.4 5 11.2 41 1.2 41 7.4.5 27 1.4.5 27 1.2.0 5 3 6 3 5 48	8.00 18.	120
12.1 27 9.69 41 7.18 52 8.18 49 15.1 17	г. 80 г.с. 844 г.с.	22. 35. 31. 31. 31. 31. 31. 31. 31. 31. 31. 31	.50 5.4 1.9 12 4	17.8 20.2 2.2 2.2 2.2 5 2.2 5 5 2.2 5 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 2.2 5 5 2.2 5 5 5 2.2 5 5 5 5	6.31 5 6.25 5 13.7 2 29.1 29.1 29.1 20.0 5.96 5 18.4	183

,

-

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

WATER YEAR RANGE 1956 1956 1957 1957 1958 1958 1959 1959 1960 1960 1961 1962 1963 1964 1965 1981 1982 1983 1984 1985 1976 1977 1978 1979 1980 1971 1972 1973 1973 1974 1975 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1966 1967 1968 1969 1970 1961 1962 1963 1964 1965 1981 1982 1983 1984 1984 1976 1977 1978 1979 1980 103 124 95.0 97.0 66.0 127 99.0 93.0 106 107 1 93.0 99.0 99.0 121 134 89.0 87.0 130 51.0 100 83.0 115 135 119 104 96.0 134 122 444 184 204 204 04040 00707 44 49 79 79 79 150 260 260 2420 257 257 86.7 52.7 80.3 82.0 77.0 3 102 82.3 72.7 71.7 84.7 84.7 123 43.9 41.3 115 25.7 81.0 47.0 83.3 125  $30^{51}$ 78.0 79.7 76.3 127 77.7 32777 35777 20000 600NA 7 78.4 58.0 50.3 47.9 57.7 16.6 48.1 21.4 43.6 114 50.9 38.3 57.0 22.8 49.2 49.3 47.9 92.7 52.7 52.1 32.5 73.1 58.9 64.1 40.4 83.4 29.6 100 590 292 292 00004 070434 63 63 63 55 70 55 70 55 70 29 52 23 17  $\begin{array}{c}
 12 \\
 23 \\
 24 \\
 24
 \end{array}$ 31.5 29.6 73.7 35.4 4356226 19.4 64.7 21.0 18.7 76.2 10.7 24.5 15.2 26.8 102 33.1 19.7 28.7 30.7 14.0 368305 268305 . . . . . . . . . . . . . . . . . . - ω ω α μ 00568 05568 4656 15116 64705 64705 808 808 11 235326476 8.21 17.1 11.7 20.8 85.8 303030309,92 49.1 12.0 15.8 55.4 27.3 12.4 24.0 18.1 9.30 221 221 21 21 21 21 26945 26945 ພົບບົບ 🎍 ο ώ ο ώ ο 0 000 4 004 0 ω υ ω υ ω υ ω υ ω 221 221 221 221 225 17.8 9.12 30.7 16.2 20.1 21.1 6.92 17.0 10.7 8.98 5.76 38.2 7.98 10.7 32.3 7.19 12.9 8.77 15.2 62.4 150 150 150 150 150 5 W N J H 6-12-16 0404 40111 6 5 3 6 N 6 3 3 5 4 3 2 4 2 8 3 2 7 3 8 30 37 37 26022 12.3 6.74 22.5 13.4 14.7 5.79 31.9 5.85 7.42 28.5 5.48 10.3 7.66 14.5 47.2 17.0 7.98 14.4 7.87 7.82 115 111 111 111 90 12 12 18 18 ດ່ພ່າວທ 29452 29452 232223 0 0 4 4 0 0 0 0 4 8 0 4 0 4 0 4 0 4 507405 507405 40 40 40 40 40 120 16.0 10.6 14.7 14.7 11.1 15.7 12.15.73 18.6 13.8 13.2 4.45 26.6 5.24 7.21 21.7 4.43 7.82 7.23 13.0 38.4 14.66.43 11.9 6.52 6.57 15.1 10.9 11.3 34.0 11.8 3 4 4 2 9 3 0 3 4 326435 242542 0 4 0 0 0 4 4 0 0 225266 50820 183 13.2 8.19 11.7 11.7 13.5 10.2 6.08 14.1 10.9 12.2 459543 11.3 9.95 11.9 25.3 10.0 4.11 22.6 5.50 6.18 17.0 3.27 7.30 6.12 10.3 29.9 860 40 89 ພູບບບພ 155265 00000 10010 

,

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

### ANNUAL AND/OR SEMI-ANNUAL VALUES

1958 1958 10-4 52 1959 1959 8.05 39 1960 7.87 37	1956 8.13 1957 7.12	1955 9.38	1953 4.95	1952 1952 7.20 32		1949	1948 13.3	1947 11.2	1946 7.19	1945 5.90	1944 4.03		1941	1940 / .08	1939 8.84	1938 10.3	1937 12.0	1936 5.16	1935 5.96	1934 5.70 1	1933 3.38	1932 8.99	1931 7.62	1930 16.2		1928 15.3	1927 13.8	1926 5.91	1924 15.5	1923 15.3	1922	1921 9.33	1920 1920 4.11 10	19 5.03	RANGE	WATER YEAR	PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)	MEAN VALUE AND RANKING FOR
1959 1960 7.87	1958 1958 1957 7.12 37 1958 1957 7.12 37	1955 9.38		1952 7.20	1951 8.12			1947 11.2	1946 7.19	1945 5.90	1944 4.03	1943 6.79	1942 12.6				1937 12.0	1936 5.16	1935 5.96	1934 5.70	1933 3.38	1932 8.99	1931 7.62	1930 16.2	1929 12.2	1928 15.3	1927 13.8	1926 5.91	1924 15.5	1923 15.3		1921 9.33	1920 4.11	1919 5.03	RANGE	WATER YEAR	PERIOD INCLUDED IN RIGH-VALUS ANALISIS (OCT-SEP)	MEAN VALUE AND RANKING FOR

,

-

STATION ID - 16541500 MANUEL LUIS DITCH AT PUOHOKAMOA GL NR HUELO,MAUI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN ٠

•

### ANNUAL AND/OR SEMI-ANNUAL VALUES

1985 9.24	1984 4.27	1983 3.97	1982	1981 3.16	1980 18.4	1979 6.96	1978 4.76		1976 2.14	,1975 2.89	1974 3.26	1973 5.65	1972 3.79	1971 7.72	1970 7.02	1969 15.8	6.80	1967	6.78	1965 8.28	1964 1964 8.01 38	1963 8.23	1962 1962 3.81 7	RANGE	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)
1985 9.24	1984	3,97	1982	1981 3.16	18.4	1979 6.96	4.76	1977 1977 4.63 55	1976 2.14	2.89	1974 3.26	1973 5.65	1972 3.79	1971 7.72	7.02	15.8			6.78	8.28	1964 8.01	1963 8.23		RANGE	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)

STATION ID - 16544000 W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

.

### DURATION TABLE OF DAILY VALUES FOR PERIOD OCT TO SEP

- C F	CLA	193 193	1926 1927	192	192	192	192	192	192	WAT	CLASS
	ss v	1933 1933 1934 1934	6 1926 7 1927	1925 1925	4 1924	3 1923	2 1922	1 1921	RANGE 1920 1920	WATER YEAR	SS
0.00	ALUI		4 01						0	R	н
								30			N
<i>,</i> ,	TOTAL										ω
300	£		Ν						14		4
ເບີຍ	AC	16									U
3652 3652	CUM	6 1 9									67
оц 00	קי	19 24	σω						17		8
100.00	ERCJ	39 15	42 39		7		80		25		Q
	-	17 11									10
		54 6	79 27	15	45	18	47	13	86		11
14 14	CLA	9 8 9 9	30 0 0 0	ω 5	27	14	24	23	30		12
	in M	្រភ 154	ဖစ	7	29	14	13	17	20		13
0.99	VAL	41 27	57 60	თ თ	8 1	57	ω 0	73	45	NG	14
209	C E	11 18	21 20	ω ω	21	47	18	34	16	NUMBER	15
186 526	TOT	116 116	23 29	31	23	40	20	25	15	OF	16
9 0 0 9 0 0 9 0 0	AL	11 6	16 22	40	14	34	15	23	18	DAYS	17
2368 2382	Acc	19 8	16 24	23	22	ω μ	ω 0	19	14		18
л 80 бл г 10 60	MD	224	10 23	26	23	20	30	29	v	IN CLASS	19
70.32 65.22	PER	12 9	37 12	24	თ	18	20	16	14	ω.	20
0 N 3 3 N 2	ĊŢ	13 4	16 5	12	თ	11	р 5	80	Q		21
		н 54	<b>σ</b> ⊢	12	17	φ	14	11	сл		22
	Q	4 00	œ	42	'n	თ	7	ω	Ч		23
100 100	LASS	94	6 H	σ	10	თ	Ŷ	12	ω		24
งยย		њ б	64	12	ማ	თ	Q	4	4		25
15.00 19.00 74.00	VALUE	73	ω μ	42	ማ	თ	Ţ	u	N		26
	н	4 8	4 12	œ	₽	σ	N	\$	1		27
44 44	TOTAI	72	ω	Ŵ					ω		28
		чч	σN	4							29 3
- N N	ACCUM	н <b>ч</b>	44	N							03
295 234	UM.	1 2 2		24	2	<b>⊷</b> ∙	თ თ	حير	ч н		29 30 31 32
ന ന ന	PE		Ч		N	N	4	1	-		ω ω
ກ 6.08 30	PERCT	N					س				34
		щ		ч							ω 5


12	11	10	9	œ	7	ი	σ	4	ω	N	<u>н</u>	CLASS	
0.79	0.62	0.50	0.40	0.31	0.25	0.20	0.16	0.13	0.10	0.08	0.00	VALUE	
296	444	28	175	69	10	16	0	16	0	30	0	TOTAL	
2864	3308	3336	3511	3580	3590	3606	3606	3622	3622	3652	3652	ACCUM	
78.42	90.58	91.35	96.14	98.03	98.30	98.74	98.74	99.18	99.18	100.00	100.00	PERCT	
24	23	22	21	20	19	18	17	16	15	14	13	CLASS	
12.00	9.70	7.70	6.10	4.90	3.90	3.10	2.50	2.00	1.60	1.20	0.99	VALUE	
66	46	94	60T	167	202	206	199	233	239	526	186	TOTAL	
361	407	501	610	777	979	1185	1384	1617	1856	2382	2568	ACCUM	
88.6	11.14	13.72	16.70	21.28	26.81	32.45	37.90	44.28	50.82	65.22	70.32	PERCT	
	35	34	33	32	31	30	29	28	27	26	25	CLASS	
	150.00	119.00	95.00	76.00	60.00	48.00	38.00	30.00	24.00	19.00	15.00	VALUE	
	N	7	10	12	19	18	40	40	42	44	61	TOTAL	
		9											
		0.25											

,

DURATION CURVE STATISTICAL CHARACTERISTICS FOR ... STATION ID: 16544000 W B PUOHOKAMOA STR PARAMETER CODE = 00060 STATISTIC CODE - 00003 MEAN COEFFICIENT OF VARIATION ADDITIONAL CONDITIONS FOR THIS RUN ARE: STATISTICS ARE BASED ON LOGARITHMS (BASE 10). NUMBER OF VALUES IS REDUCED FOR EACH NEAR-ZERO OR ZERO VALUE. DURATION DATA VALUES ARE INTERPOLATED FROM DURATION TABLE: DATA ARE NOT ANALYTICALLY FITTED TO A PARTICULAR STATISTICAL DISTRIBUTION, AND THE USER IS RESPONSIBLE FOR ASSESSMENT AND INTERPRETATION. STANDARD DEVIATION OF LOGS MEAN OF LOGS = PERCENT OF TIME VALUE EQUALED OR EXCEEDED NUMBER OF VALUES = 19 (NUMBER OF NEAR-ZERO VALUES = LISTING OF DATA FOLLOWS: 10.0  $\begin{array}{c} 995.0\\ 990.0\\ 885.0\\ 77$ 0.31606 DATA VALUE П в 11.8 25.1 1.46597 W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI (LOG (LOG (LOG (LOG II 11 a 11 11 11 -0.37287) -0.20196) -0.15612) -0.11467) -0.05826) 0.00134) 0.08143) 0.17142) 0.17142) 0.221754) 0.221754) 0.22133) 0.36832) 0.36832) 0.36832) 0.45009) 0.45009) 0.45009) 0.45009) 0.62600) 0.62600) 0.71890) 0.71890) 0.71890) 1.07151) 1.07151) 9

0.46333 (VARIABILITY INDEX - SEE USGS WSP 1542-A)

COEFFICIENT OF SKEW JI. 0.74911

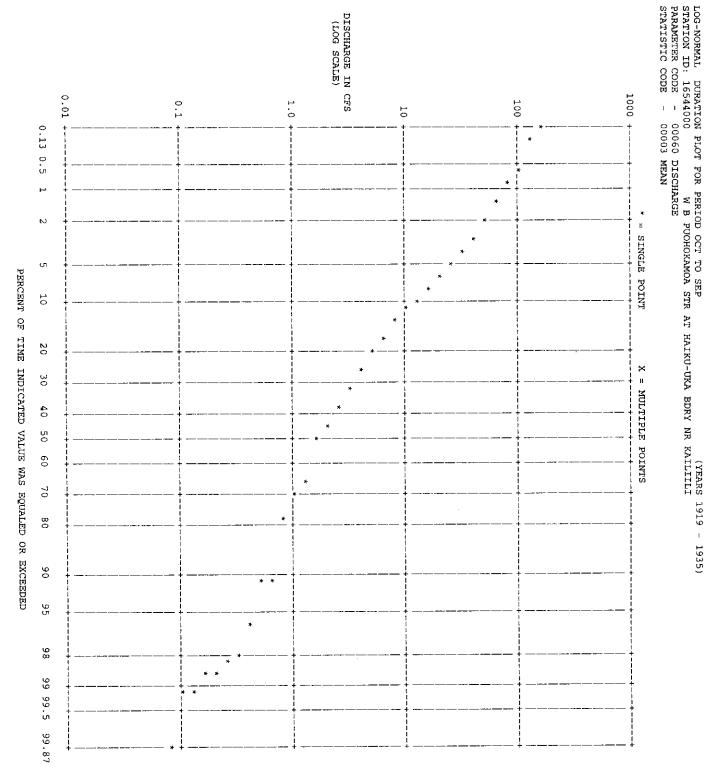

STATION ID - 16544000 W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

WATER YEAR RANGE 1920 1920 1921 1921 1922 1922 1923 1923 1923 1923 1924 1924 1925 1925 .080 .46 .46 .46 . 15  $\mathbf{P}$ 108971 N .080 .46 .46 .46 . 15 10 10 10 N .083 .48 .51 . 15 -7 20 17 10 N .086 .59 .89 14 .16 10 8 9 10 N .087 .87 .87 30 . 32 108961 N .76 .82 2.93 1.36 1.97 60 . 63 97032 ч 1.20 1.24 3.28 2.98 3.18 90 . 98 د 4 0 8 9 ч 120 1.45 2.32 1.59 3.53 2.72 4.31 10 6 9 4 9 7 2 183 2.24 3 3.54 3.91 5.52

.25 23

പന

.25

<sub>4</sub>⊳ υ

.23

ωm

.39 .28

ωσ

.42

աթ

.84 1.05

4 N

1.19 2.82

ч Г

1.44

71

1.82 3.39

σN

. 31 . 15

ωσ

. 36

ωσ

.42 .29

њ О

.46 .35

<u></u>А б

. 69 . 48

σJ

1.27 1.78

დთ

 $1.31 \\ 2.07$ 

ரை

1.58 3.24

ထယ

 $1.64 \\ 3.32$ 

σ⊢

108947

LOWEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

STATION ID - 16544000 W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN

# HIGHEST MEAN VALUE AND RANKING FOR THE FOLLOWING NUMBER OF CONSECUTIVE DAYS FOR PERIOD OCT TO SEP

		WATER YEAR RANGE 1920 1920 1921 1921 1922 1922 1922 1922 1923 1923 1924 1924 1925 1925
124 5 155 1	50.0 10 108 8	94.0 94.0 111 7 128 4 121 6 121 6 141 3
95.0 3 62.4 7	24.7 10 46.5 9	3 50.0 96.3 96.3 70.3 5
51.2 3 45.6 5	13.8 10 24.4 9	4 3 3 8 0 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 5 3 6 5 3 6 6
25.0 8 33.5 3	$7.84 10 \\ 14.1 9$	15 26.1 28.9 46.9 55.6 21.1 25.6 31.9 41.1 25.6 31.9 41.1 21.9 41.1 21.9 41.1 21.5 41.2 25.6 31.5 25.6 31.5 25 25 25 25 26 26 26 26 26 26 26 26 26 26 26 26 26
17.1 6 21.9 4	7.66 10 8.57 9	30 15.2 18.4 37.2 21.9 35.2 25.7 25.7 2
11.5 6 14.9 3	<b>4.76 10</b> 7.05 9	60 8.47 13.9 26.2 14.3 14.3 4 15.3 2 2 2 2 2 3 2 2 2 2 3 2 2 2 2 3 2
9.71 6 13.9 2		90 5.99 91 11.8 24.8 11.5 9.32 9.32 7 11.9 3
8.40 7 12.0 2	3.47 10 5.59 8	120 5.41 9 10.0 3 25.2 1 9.90 5 8.91 6 8.91 6
		183 4.2 8.6 8.6 9 18.5 9 8.5 7 14 2 5 7 3 3

STATION ID - 16544000 W B PUOHOKAMOA STR AT HAIKU-UKA BDRY NR KAILIILI PARAMETER CODE - 00060 DISCHARGE STATISTIC CODE - 00003 MEAN -

•

### ANNUAL AND/OR SEMI-ANNUAL VALUES

				1925 1925 6.95 9						RANGE	WATER YEAR	MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN LOW-VALUE ANALYSIS (OCT-SEP)
1934 1934	1933 1933	1927 1927	1926 1926	1925 1925	1924 1924	1923 1923	1922 1922	1921 1921	1920 1920	RANGE	WATER YEAR	MEAN VALUE AND RA PERIOD INCLUDED IN HIGE (OCT-SEP)
6.19 4	3.70 8	4.40 7	2.64 10	6.95 2	5.67 5	6.21 3	10.5 1	5.54 6	2.93 9			MEAN VALUE AND RANKING FOR PERIOD INCLUDED IN HIGH-VALUE ANALYSIS (OCT-SEP)