Layer Name: Bridges in the State of Hawaii as of December, 2020

File Name: bridges nbi

Layer Type: Point

Status: Complete

Geog. Extent: Main Hawaiian Islands

Projection: Universal Transverse Mercator, Zone 4 (Meters)

Datum: NAD 83 HARN

Please note - if you are using data in the <u>State's web services</u> or downloading from the <u>State's</u> <u>geoportal</u>, the data is served and exported in WGS84 coordinates, although it is stored internally

in UTM coordinates.

Description: Bridges in the State of Hawaii, as of December, 2020.

Source: National Bridge Inventory, December 2020. Hawaii bridges downloaded by Hawaii Statewide GIS

Program from the US Dept. of Transportation Federal Highway Administration

(https://www.fhwa.dot.gov/bridge/nbi/ascii2020.cfm) on May 21, 2021. Projected to UTM Zone

4 NAD 83 HARN.

Attributes: Please see table on following pages for summary of attributes and domains. Please also see

complete metadata at <a href="http://files.hawaii.gov/dbedt/op/gis/data/bridges\_nbi.html">http://files.hawaii.gov/dbedt/op/gis/data/bridges\_nbi.html</a>.

Contact: Hawaii Statewide GIS Program

Office of Planning, State of Hawaii

Phone: (808) 587-2846 Email: gis@hawaii.gov

Please also refer to the following documents (included with this PDF document):


131216\_a1.pdf: Specification for NBI Bridge Elements: downloaded from https://www.fhwa.dot.gov/bridge/nbi/131216 a1.pdf, 6/9/21

NBI Attributes.pdf – NBI Attribute listing/record format: downloaded from <a href="https://www.fhwa.dot.gov/bridge/nbi/format.cfm">https://www.fhwa.dot.gov/bridge/nbi/format.cfm</a>, 6/7/21

http://nationalbridges.com/nbiDesc.html - listing of each NBI element/attribute with description, valid codes



# SPECIFICATION FOR THE NATIONAL BRIDGE INVENTORY BRIDGE ELEMENTS

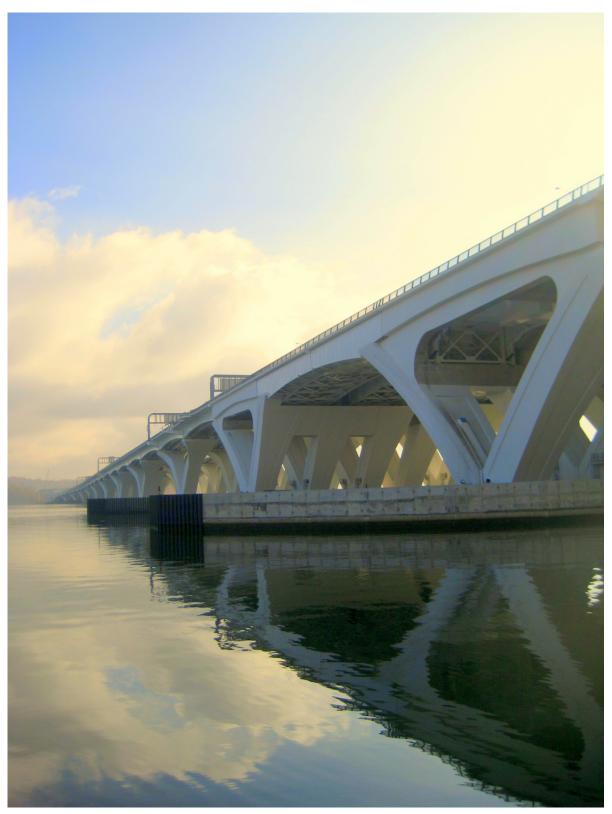

01-21-2014

## Contents

Introduction	2
Framework	2
Elements	2
Element Condition	2
Specification Format	4
Element Data Items	6
State Code	7
Structure Number	8
Element Number	9
Element Parent Number	10
Element Total Quantity	11
Element Quantity Condition State One	12
Element Quantity Condition State Two	13
Element Quantity Condition State Three	14
Element Quantity Condition State Four	15
APPENDIX A – EXAMPLE DATA SET	A-1
APPENDIX B – BRIDGE ELEMENTS	B-1
APPENDIX C _ RRIDGE FLEMENT DATA FORMAT	C-1

#### Introduction

The proper assessment of element level bridge conditions and the ability to use the condition data to efficiently and effectively manage bridge inventories are cornerstones to providing a safe and efficient highway transportation system. The introduction of element level bridge inspection techniques in the early 1990s represents a significant advancement in bridge inspection and management practice and has been adopted by the majority of State Transportation Departments in the United States. The FHWA and bridge owners nationwide have recognized the benefits of more detailed element level bridge inspection condition data to better show the severity and extent of bridge condition deficiencies. The collection and use of element level bridge inspection data by the FHWA is expected to improve the performance management of the nation's highway bridges through enhanced national level analysis, forecasting, and reporting of bridge conditions and needs (preservation, improvement, and replacement) using risk-based, data driven methods.

The goals of this document are to:

- Set the framework for the inventory and assessment of common bridge elements that
  can be used to better describe the condition of highway bridges in the National Bridge
  Inventory, and
- Provide consistency for element identification, quantity measurement, and condition state assessment.

#### **Framework**

This specification provides the framework needed to support the collection and reporting of element level bridge condition data to the FHWA. Refer to the AASHTO Manual for Bridge Element Inspection, First Edition (AASHTO Manual) for element descriptions, quantity calculations and condition state definitions.

#### **Elements**

Refer to Table 1 for a listing of elements for which data will be collected by the FHWA. Data items to be collected for each element inventoried for a bridge are specified in the Element Data Items section. Specific material defects as shown in the AASHTO Manual will not be collected.

#### **Element Condition**

All elements have four defined condition states. The severity of multiple distress paths or deficiencies is defined in the AASHTO Manual for each condition state with the general intent of the condition states as follows: Condition State 1 – Good, Condition State 2 – Fair, Condition State 3 – Poor, and Condition State 4 – Severe.

For primary load carrying elements, quantities reported to the FHWA in Condition State 4 indicate that a structural review, defined in the AASHTO Manual, has been completed and observed defects impact strength or serviceability. Once actions have been taken to address severe defects, those quantities may be reassigned to another applicable condition state.

Table 1. Bridge Elements.

Table 1. Bridge Elements.							
Element	Units	Element Number  Prestressed Reinforced To the Country of the Count					
LIGHTOTIL	Units	Steel	Concrete	Concrete	Timber	Masonry	Other
		De	ck/Slab				
Deck	SF		13	12	31		60
Open Grid Deck	SF	28					
Concrete Filled Grid Deck	SF	29					
Corrugated or Orthotropic Deck	SF	30					
Slab	SF			38	54		65
Top Flange	SF		15	16			
		Supe	rstructure		•		
Closed Web/Box Girder	LF	102	104	105			106
Girder/Beam	LF	107	109	110	111		112
Stringer	LF	113	115	116	117		118
Truss	LF	120			135		136
Arch	LF	141	143	144	146	145	142
Main Cable	LF	147					
Secondary Cable	EA	148					149
Floor Beam	LF	152	154	155	156		157
Pin, Pin and Hanger Assembly	EA	161					
Gusset Plate	EA	162					
		Sub	structure				
Column	EA	202	204	205	206		203
Column Tower (Trestle)	LF	207			208		
Pier Wall	LF			210	212	213	211
Abutment	LF	219		215	216	217	218
Pile Cap/Footing	LF			220			
Pile	EA	225	226	227	228		229
Pier Cap	LF	231	233	234	235		236
		(	Culvert				
Culvert	LF	240	245	241	242	244	243
		Bri	dge Rail				
Bridge Rail	LF	330*		331	332	334	333
			Joint				
Strip Seal	LF			300			
Pourable	LF			301			
Compression	LF			302			
Assembly with Seal (Modular)	LF			303			
Open	LF			304			
Assembly without Seal	LF			305			
Other	LF			306			
		В	Bearing				
Elastomeric	EA			310			
Movable (roller, sliding, etc.)	EA			311			
Enclosed/Concealed	EA						
Fixed	EA						
Pot	EA						
Disk	EA	315					
Other							
		rfaces	and Protectiv				
Wearing Surfaces SF 510							
Steel Protective Coating							
Concrete Protective Coating *Flement 330-Metal Bridge Rail m	SF	<u> </u>	<del> </del>	521			

<sup>\*</sup>Element 330-Metal Bridge Rail may include steel or aluminum rails.

## **Specification Format**

These specifications provide information in a format modeled in part after the AASHTO design specifications, with the specifications separated and presented parallel to the commentary. The format used to present *new data items* is as shown in the following table.

Data Item Name				
Format	Frequency	Record Type	Item Number or Element Number	
S	pecification	Commentary		
Specifications and any codes and information required.		Commentary on the spec	ifications.	
Specification Continued, Commentary Continued or Examples				
Additional Space				

The fields shown in the table above are further described as follows.

Field Name	Field Name Description
Data Item Name	Name of the data item.
Format	Designates the format of the data.
	Alphanumeric (ANX) – X is the length of the field
	Numeric (X,Y) – X is the length of the field and Y is the number of decimal places
	This information is provided to assist owners when establishing databases.
	Examples:  AN4 – Alphanumeric data, field length 4  N (8,3) – Numeric data, field length 8, decimal places 3
Frequency	Initial (I) – data recorded initially or updated when a change is made.
	Each Inspection (EI) – data verified or updated during each inspection.
	Calculated (C) – data is automatically calculated and stored by the FHWA. It is not recorded during inspections.
Record Type	Specifies whether the data must be coded for a bridge "On" record, a bridge "Under" record or both.

Field Name	Field Name Description
Item Number or	Item Number - Identifies the data item number as traditionally
Element Number	used in the 1995 Coding Guide. In this version of the
	Specifications, item numbers are not prescribed. To assist in
	review and to provide a relationship to the 1995 Coding Guide, the
	old data item numbers are provided for reference purposes.
	Element Number – Identifies the applicable bridge elements that
	are consistent with those elements defined by AASHTO.
Specification	Presents the coding required.
Commentary	Expanded guidance for the specification, but not intended to be a
	requirement of the specification.
Additional Space	Area for continuation of specification or commentary. Also may
	include examples with figures or photos to further clarify the
	specification.

#### **Element Data Items**

The data items in this section identify the elements inventoried on the bridge, the total quantity for each element, and the element quantity that exists in each of four condition states. Elements that are entirely below ground and not accessible for inspection such as piles and pile caps are not intended to be recorded. The State Code (NBI Item 1) and Structure Number (NBI Item 8) items will be reported together with each element item as an interim identifier for the element data and link to the NBI data. See Appendix A for an example data set.

Table 2. Data items to be collected and reported.

Data Items
State Code
Structure Number
Element Number
Element Parent Number
Element Total Quantity
Element Quantity Condition State One
Element Quantity Condition State Two
Element Quantity Condition State Three
Element Quantity Condition State Four

State Code				
Format N (2,0)	<u>Frequency</u> I	Record Type On	Item Number 1	
S	Specification	Commentar	У	
Record the State code where the bridge is located using one of the codes in the table below.		State codes are derived from Standard Codes For States (F		

# Specification Continued

<u>Code</u>	<u>Description</u>	<u>Code</u>	<u>Description</u>	<u>Code</u>	<u>Description</u>
1	Alabama	22	Louisiana	40	Oklahoma
2	Alaska	23	Maine	41	Oregon
4	Arizona	24	Maryland	42	Pennsylvania
5	Arkansas	25	Massachusetts	44	Rhode Island
6	California	26	Michigan	45	South Carolina
8	Colorado	27	Minnesota	46	South Dakota
9	Connecticut	28	Mississippi	47	Tennessee
10	Delaware	29	Missouri	48	Texas
11	District of Columbia	30	Montana	49	Utah
12	Florida	31	Nebraska	50	Vermont
13	Georgia	32	Nevada	51	Virginia
15	Hawaii	33	New Hampshire	53	Washington
16	Idaho	34	New Jersey	54	West Virginia
17	Illinois	35	New Mexico	55	Wisconsin
18	Indiana	36	New York	56	Wyoming
19	Iowa	37	North Carolina	72	Puerto Rico
20	Kansas	38	North Dakota		
21	Kentucky	39	Ohio		

Structure Number				
<u>Format</u>	<u>Frequency</u>	Record Type	<u>Item Number</u>	
AN15	I	On	8	
	Specification	Commentary		
Record the same exact number as recorded for NBI item 8 – Structure Number.		There are no national policies established for assigning unique structure numbers. Therefore, each State Transportation		
Do not change the structure number once it has been assigned and recorded.  Department or Federal agency develops policy for assigning unique structure numbers.				

# Bridges & Structures

## **NBI ASCII Files**

## **NBI** Record Format

With the conversion to metric and the addition of new items it is required to expand the size of the NBI record to 445 characters. The following format will be used to submit data to the FHWA.

ITEM NO	ITEM NAME	ITEM POSITION	ITEM LENGTH/TYPE
1	State Code	1 - 3	3/N
8	Structure Number	4 - 18	15/AN
5	Inventory Route	19 - 27	9/AN
5A	Record Type	19	1/AN
5B	Route Signing Prefix	20	1/N
5C	Designated Level of Service	21	1/N
5D	Route Number	22 - 26	5/AN
5E	Directional Suffix	27	1/N
2	Highway Agency District	28 - 29	2/AN
3	County (Parish) Code	30 - 32	3/N
4	Place Code	33 - 37	5/N
6	Features Intersected	38 - 62	25/AN
6A	Features Intersected	38 - 61	24/AN
6B	Critical Facility Indicator	62	1/AN
7	Facility Carried By Structure	63 - 80	18/AN
9	Location	81 - 105	25/AN
10	Inventory Rte, Min Vert Clearance	106 - 109	4/N
11	Kilometerpoint	110 - 116	7/N
12	Base Highway Network	117	1/N
13	Inventory Route, Subroute Number	118 - 129	12/AN
13A	LRS Inventory Route	118 - 127	10/AN
13B	Subroute Number	128 - 129	2/N
16	Latitude	130 - 137	8/N
17	Longitude	138 - 146	9/N
19	Bypass/Detour Length	147 - 149	3/N
20	Toll	150	1/N
21	Maintenance Responsibility	151 - 152	2/N

ITEM NO	ITEM NAME	ITEM POSITION	ITEM LENGTH/TYPE
22	Owner	153 - 154	2/N
26	Functional Class Of Inventory Rte.	155 - 156	2/N
27	Year Built	157 - 160	4/N
28	Lanes On/Under Structure	161 - 164	4/N
28A	Lanes On Structure	161 - 162	2/N
28B	Lanes Under Structure	163 - 164	2/N
29	Average Daily Traffic	165 - 170	6/N
30	Year Of Average Daily Traffic	171 - 174	4/N
31	Design Load	175	1/N
32	Approach Roadway Width	176 - 179	4/N
33	Bridge Median	180	1/N
34	Skew	181 - 182	2/N
35	Structure Flared	183	1/N
36	Traffic Safety Features	184 - 187	4/AN
36A	Bridge Railings	184	1/AN
36B	Transitions	185	1/AN
36C	Approach Guardrail	186	1/AN
36D	Approach Guardrail Ends	187	1/AN
37	Historical significance	188	1/N
38	Navigation Control	189	1/AN
39	Navigation Vertical Clearance	190 - 193	4/N
40	Navigation Horizontal Clearance	194 - 198	5/N
41	Structure Open/Posted/Closed	199	1/AN
42	Type Of Service	200 - 201	2/N
42A	Type of Service On Bridge	200	1/N
42B	Type of Service Under Bridge	201	1/N
43	Structure Type, Main	202 - 204	3/N
43A	Kind of Material/Design	202	1/N
43B	Type of Design/Construction	203 - 204	2/N
44	Structure Type, Approach Spans	205 - 207	3/N
44A	Kind of Material/Design	205	1/N
44B	Type of Design/Construction	206 - 207	2/N
45	Number Of Spans In Main Unit	208 - 210	3/N
46	Number Of Approach Spans	211 - 214	4/N
47	Inventory Rte Total Horz Clearance	215 - 217	3/N
48	Length Of Maximum Span	218 - 222	5/N
49	Structure Length	223 - 228	6/N

ITEM	ITEM NAME	ITEM	ITEM
<b>NO</b> 50	Curb/Sidewalk Widths	POSITION 229 - 234	LENGTH/TYPE 6/N
50A	Left Curb/Sidewalk Width	229 - 231	3/N
50B	Right Curb/Sidewalk Width	232 - 234	3/N
51	Bridge Roadway Width Curb-To-Curb	235 - 238	4/N
52	Deck Width, Out-To-Out	239 - 242	4/N
53	Min Vert Clear Over Bridge Roadway	243 - 246	4/N
54	Minimum Vertical Underclearance	247 - 251	5/AN
54A	Reference Feature	247	1/AN
54B	Minimum Vertical Underclearance	248 - 251	4/N
55	Min Lateral Underclear On Right	252 - 255	4/AN
55A	Reference Feature	252	1/AN
55B	Minimum Lateral Underclearance	253 - 255	3/N
56	Min Lateral Underclear On Left	256 - 258	3/N
58	Deck	259	1/AN
59	Superstructure	260	1/AN
60	Substructure	261	1/AN
61	Channel/Channel Protection	262	1/AN
62	Culverts	263	1/AN
63	Method Used To Determine Operating Rating	264	1/N
64	Operating Rating	265 - 267	3/N
65	Method Used To Determine Inventory Rating	268	1/N
66	Inventory Rating	269 - 271	3/N
67	Structural Evaluation	272	1/AN
68	Deck Geometry	273	1/AN
69	Underclear, Vertical & Horizontal	274	1/AN
70	Bridge Posting	275	1/N
71	Waterway Adequacy	276	1/AN
72	Approach Roadway Alignment	277	1/AN
75	Type of Work	278 - 280	3/N
75A	Type of Work Proposed	278 - 279	2/N
75B	Work Done By	280	1/AN
76	Length Of Structure Improvement	281 - 286	6/N
90	Inspection Date	287 - 290	4/N
91	Designated Inspection Frequency	291 - 292	2/N
92	Critical Feature Inspection	293 - 301	9/AN
92A	Fracture Critical Details	293 - 295	3/AN
J2A	Underwater Inspection	200 - 200	O// ti 4

			-
ITEM NO	ITEM NAME	ITEM POSITION	ITEM LENGTH/TYPE
92C	Other Special Inspection	299 - 301	3/AN
93	Critical Feature Inspection Dates	302 - 313	12/AN
93A	Fracture Critical Details Date	302 - 305	4/AN
93B	Underwater Inspection Date	306 - 309	4/AN
93C	Other Special Inspection Date	310 - 313	4/AN
94	Bridge Improvement Cost	314 - 319	6/N
95	Roadway Improvement Cost	320 - 325	6/N
96	Total Project Cost	326 - 331	6/N
97	Year Of Improvement Cost Estimate	332 - 335	4/N
98	Border Bridge	336 - 340	5/AN
98A	Neighboring State Code	336 - 338	3/AN
98B	Percent Responsibility	339 - 340	2/N
99	Border Bridge Structure Number	341 - 355	15/AN
100	STRAHNET Highway Designation	356	1/N
101	Parallel Structure Designation	357	1/AN
102	Direction Of Traffic	358	1/N
103	Temporary Structure Designation	359	1/AN
104	Highway System Of Inventory Route	360	1/N
105	Federal Lands Highways	361	1/N
106	Year Reconstructed	362 - 365	4/N
107	Deck Structure Type	366	1/AN
108	Wearing Surface/Protective System	367 - 369	3/AN
108A	Type of Wearing Surface	367	1/AN
108B	Type of Membrane	368	1/AN
108C	Deck Protection	369	1/AN
109	AVERAGE DAILY TRUCK TRAFFIC	370 - 371	2/N
110	DESIGNATED NATIONAL NETWORK	372	1/N
111	PIER/ABUTMENT PROTECTION	373	1/N
112	NBIS BRIDGE LENGTH	374	1/AN
113	SCOUR CRITICAL BRIDGES	375	1/AN
114	FUTURE AVERAGE DAILY TRAFFIC	376 - 381	6/N
115	YEAR OF FUTURE AVG DAILY TRAFFIC	382 - 385	4/N
116	MINIMUM NAVIGATION VERTICAL CLEARANCE VERTICAL LIFT BRIDGE	386 - 389	4/N
_	Federal Agency Indicator *	390	1/AN
_	Submitted By (State Code or Owner Code)*	391-392	2/N
_	Washington Headquarters Use*	393 - 433	-

6/7/2021 NBI Record Format - NBI ASCII Files - National Bridge Inventory - Bridge Inspection - Safety - Bridges & Structures - Federal Highway Ad...

ITEM NO	ITEM NAME	ITEM POSITION	ITEM LENGTH/TYPE
CAT10	Bridge Condition* (as defined by 23 CFR 490 Subpart D.)	434	1/AN
CAT23	Lowest Condition Code* (lowest value of Items 58, 59, 60, and 62.)	435	1/AN
CAT29	Deck Area* (as defined by 23 CFR 490 Subpart D).	436 - 445	10/N


<sup>\*</sup> These fields are not a part of the NBI submittal file. They are for download only.


Federal Highway Administration | 1200 New Jersey Avenue, SE | Washington, DC 20590 | 202-366-4000

Format N (4,0)	Frequency FI	Record Type On	Element Number All
14 (4,0)	L1	Oil	All
Record the applicable each element inventor	e element number (EN) for oried for the bridge.	Refer to the element listi Elements section for app	3

Element	EN
Reinforced Concrete Deck	
Wearing Surface	
Open Joint	
Reinforced Concrete Bridge Railing	
Steel Beam/Girder	
Steel Protective Coating	

Element	EN
Elastomeric Bearings	
Reinforced Concrete Columns	
Reinforced Concrete Pier Wall	
Reinforced Concrete Abutment	
Reinforced Concrete Pier Cap	

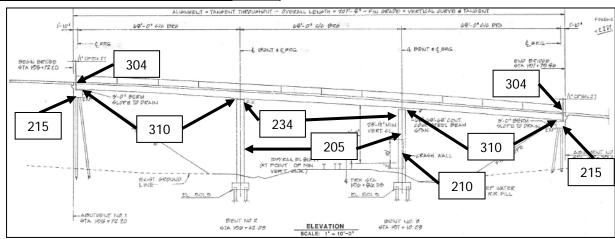

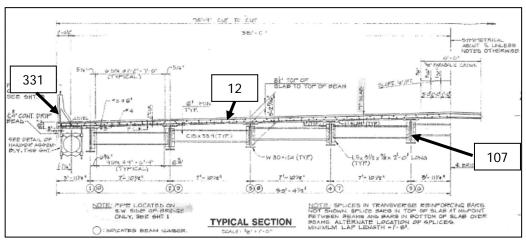

Element Parent Number					
Format N (4,0)	Frequency EI	Record Type On	Element Number All		
Spec	cification	Commentary			
Record the element number for the protected element for each protective system element inventoried on the bridge.  Leave blank for elements that do not have a		Refer to the element listing Elements section for apposystem elements.	o o		
protective system.	ents that do not have a				

Values shown in the shaded cells are the element parent number (EPN) data for the *Element Numbers* in this example and continued for other related data items. The wearing surface element is a protective system for the deck element and the steel protective coating element is a protective system for the steel beam/girder element.

Element	EN	EPN
Reinforced Concrete Deck	12	
Wearing Surface	510	12
Open Joint	304	
Reinforced Concrete Bridge Railing	331	
Steel Beam/Girder	107	
Steel Protective Coating	515	107
Elastomeric Bearings	310	
Reinforced Concrete Columns	205	
Reinforced Concrete Pier Wall	210	
Reinforced Concrete Abutment	215	
Reinforced Concrete Pier Cap	234	

Element Total Quantity					
Format	Frequency	Record Type	Element Number		
N (8,0)	EI	On	All		
Spec	ification	Commen	tary		
Record the total element quantity to the nearest whole unit of measure for each applicable element inventoried for the bridge.  Refer to the AASHTO Manual for details on the calculation of total element quantities for applicable elements.					

Element	EN	EPN	Total QTY
Reinforced Concrete Deck (SF)	12		16217
Wearing Surface (SF)	510	12	15783
Open Joint (LF)	304		
Reinforced Concrete Bridge Railing (LF)	331		
Steel Beam/Girder (LF)	107		
Steel Protective Coating (SF)	515	107	
Elastomeric Bearings (EA)	310		40
Reinforced Concrete Columns (EA)	205		8
Reinforced Concrete Pier Wall (LF)	210		
Reinforced Concrete Abutment (LF)	215		
Reinforced Concrete Pier Cap (LF)	234		

Element Quantity Condition State One					
Format N (8,0)	Frequency EI	Record Type On	Element Number All		
Spec	ification	Commentary			
Record the element quantity assigned to condition state one to the nearest whole unit of measure for each applicable element inventoried for the bridge.		Refer to the AASHTO Mandescriptions, quantity calculation state definitions.			

Element	EN	EPN	Total QTY	CS-1 QTY
Reinforced Concrete Deck (SF)	12		16217	0
Wearing Surface (SF)	510	12	15783	15083
Open Joint (LF)	304		158	100
Reinforced Concrete Bridge Railing (LF)	331		412	360
Steel Beam/Girder (LF)	107		2054	1044
Steel Protective Coating (SF)	515	107	15728	0
Elastomeric Bearings (EA)	310		40	30
Reinforced Concrete Columns (EA)	205		8	4
Reinforced Concrete Pier Wall (LF)	210		54	44
Reinforced Concrete Abutment (LF)	215		182	140
Reinforced Concrete Pier Cap (LF)	234		150	105

Element Quantity Condition State Two					
Format Frequency Record Type Element Numbe N (8,0) EI On All					
Spec	ification	Commentary			
Record the element q condition state two to of measure for each a inventoried for the bri	the nearest whole unit applicable element	Refer to the AASHTO Mandescriptions, quantity calculation state definitions.	ulations and		

Element		EPN	Total OTY	CS-1 OTY	CS-2 QTY
Reinforced Concrete Deck (SF)	12		16217	0	16000
Wearing Surface (SF)	510	12	15783	15083	500
Open Joint (LF)	304		158	100	58
Reinforced Concrete Bridge Railing (LF)	331		412	360	40
Steel Beam/Girder (LF)	107		2054	1044	1000
Steel Protective Coating (SF)	515	107	15728	0	5628
Elastomeric Bearings (EA)	310		40	30	5
Reinforced Concrete Columns (EA)	205		8	4	4
Reinforced Concrete Pier Wall (LF)	210		54	44	5
Reinforced Concrete Abutment (LF)	215		182	140	30
Reinforced Concrete Pier Cap (LF)	234	·	150	105	30

Element Quantity Condition State Three							
Format N (8,0)	Frequency EI	Record Type On	Element Number All				
Spec	ification	Commentary					
Record the element q condition state three of measure for each a inventoried for the bri	to the nearest whole unit applicable element	Refer to the AASHTO Mandescriptions, quantity calculation state definitions.					

Element		EPN	Total QTY	CS-1 QTY	CS-2 QTY	CS-3 QTY
Reinforced Concrete Deck (SF)	12		16217	0	16000	217
Wearing Surface (SF)	510	12	15783	15083	500	0
Open Joint (LF)	304		158	100	58	0
Reinforced Concrete Bridge Railing (LF)	331		412	360	40	12
Steel Beam/Girder (LF)	107		2054	1044	1000	10
Steel Protective Coating (SF)	515	107	15728	0	5628	10000
Elastomeric Bearings (EA)	310		40	30	5	5
Reinforced Concrete Columns (EA)	205		8	4	4	0
Reinforced Concrete Pier Wall (LF)	210		54	44	5	5
Reinforced Concrete Abutment (LF)	215		182	140	30	12
Reinforced Concrete Pier Cap (LF)	234		150	105	30	15

Element Quantity Condition State Four							
Format N (8,0)	Frequency EI	Record Type On	Element Number All				
Spec	ification	Commentary					
Record the element q condition state four to of measure for each a inventoried for the bri	the nearest whole unit applicable element	Refer to the AASHTO Mandescriptions, quantity calculation state definitions.					

Quantities shown in the shaded cells are the data for the *Element Numbers* in this example.

Element		EPN	Total QTY	CS-1 QTY	CS-2 QTY	CS-3 QTY	CS-4 QTY
Reinforced Concrete Deck (SF)	12		16217	0	16000	217	0
Wearing Surface (SF)	510	12	15783	15083	500	0	200
Open Joint (LF)	304		158	100	58	0	0
Reinforced Concrete Bridge Railing (LF)	331		412	360	40	12	0
Steel Beam/Girder (LF)	107		2054	1044	1000	10	0
Steel Protective Coating (SF)	515	107	15728	0	5628	10000	100
Elastomeric Bearings (EA)	310		40	30	5	5	0
Reinforced Concrete Columns (EA)	205		8	4	4	0	0
Reinforced Concrete Pier Wall (LF)	210		54	44	5	5	0
Reinforced Concrete Abutment (LF)	215		182	140	30	12	0
Reinforced Concrete Pier Cap (LF)	234		150	105	30	15	0

### APPENDIX A – EXAMPLE DATA SET

This example shows the progression of data sets taking into account all inspections performed since the last submittal of data to the FHWA and ending with the data set (Table A-3) that would be submitted to the FHWA.

Table A-1: Data set for a complete routine inspection performed since the last submittal of data to the FHWA.

State Code	Structure Number	EN	EPN	Total QTY	CS-1 QTY	CS-2 QTY	CS-3 QTY	CS-4 QTY
1	14277	12		16217	0	16000	217	0
1	14277	510	12	15783	15083	500	0	200
1	14277	107		2054	1044	1000	10	0
1	14277	515	107	15728	0	5628	10000	100
1	14277	205		8	4	4	0	0
1	14277	210		54	44	5	5	0
1	14277	215		182	140	30	12	0
1	14277	234		150	105	30	15	0
1	14277	304		158	100	58	0	0
1	14277	310		40	30	5	5	0
1	14277	331		412	360	40	12	0

Preservation work was completed on the reinforced concrete deck (12) and steel open girder/beam (107). A special inspection was performed prior to submittal of data to the FHWA to update the condition of the following elements: steel protective coating (515), steel open girder/beam (107 - with section loss), reinforced concrete deck (12), new wearing surface (510) and new pourable joints (301). The data for this inspection is shown in Table A-2.


Table A-2: Data collected for special inspection to account for preservation work that occurred after inspection data shown in Table A-1 and prior to submittal of data to the FHWA. Cells shaded to show changes in data from Table A-1.

State	Structure	EN	EPN	Total	CS-1	CS-2	CS-3	CS-4
Code	Number	LIN	EPIN	QTY	QTY	QTY	QTY	QTY
1	14277	12		16217	0	16217	0	0
1	14277	510	12	15783	15783	0	0	0
1	14277	107		2054	2044	0	10	0
1	14277	515	107	15728	15728	0	0	0
1	14277	301		158	158	0	0	0

Table A-3: Data set submitted to the FHWA reflecting all inspections performed since the last data submittal to the FHWA. Cells shaded to show changes in data from Table A-1.

State	Structure	EN	EPN	Total	CS-1	CS-2	CS-3	CS-4
Code	Number	CIN	EPIN	QTY	QTY	QTY	QTY	QTY
1	14277	12		16217	0	16217	0	0
1	14277	510	12	15783	15783	0	0	0
1	14277	107		2054	2044	0	10	0
1	14277	515	107	15728	15728	0	0	0
1	14277	301		158	158	0	0	0
1	14277	205		8	4	4	0	0
1	14277	210		54	44	5	5	0
1	14277	215		182	140	30	12	0
1	14277	234		150	105	30	15	0
1	14277	310		40	30	5	5	0
1	14277	331		412	360	40	12	0

## APPENDIX B - BRIDGE ELEMENTS

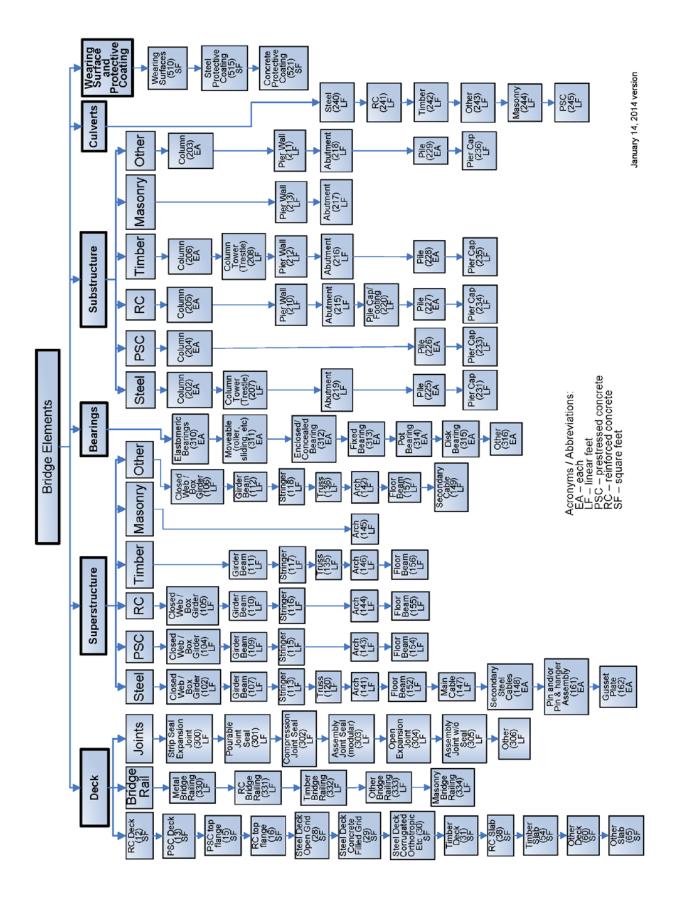

# APPENDIX C – BRIDGE ELEMENT DATA FORMAT

SNBI Bridge Element Data Items	Format
State Code	N (2,0)
Structure Number	AN15
Element Number	N (4,0)
Element Parent Number	N (4,0)
Element Total Quantity	N (8,0)
Element Quantity Condition State 1	N (8,0)
Element Quantity Condition State 2	N (8,0)
Element Quantity Condition State 3	N (8,0)
Element Quantity Condition State 4	N (8,0)